



BEP-275



12 YEARS PRODUCT WARRANTY



25 YEARS LINEAR PERFORMANCE WARRANTY



100% ELECTROLUMINESCENCE INSPECTION



GUARANTEED POSITIVE POWER TOLERANCE



IP68 JUNCTION BOX AVAILABLE



INNOVATIVE SOLUTION: ANTI-REFLECTIVE COATING FOR HIGH SUNLIGHT ABSORPTION



HIGH QUALITY COMPONENTS



PACKING SYSTEM TO AVOID MICROCRACKS



5 BUSBARS




MODULE FULL BLACK AND LUMINO WITH TRANSPARENT FOIL AVAILABLE



POWER OPTIMIZER AVAILABLE

CERTIFICATES:



Headquarters:
 Bruk-Bet Sp. z o.o.
 Nieciecza 199, 33-240 Żabno
 VAT: PL5170200580

T: +48 14 632 08 20
 F: +48 14 632 08 21

Production site:
 Bruk - Bet Solar
 ul. Mroźna 8, 33-102 Tarnów, Poland

solar@bruk-bet.pl
 www.solar.bruk-bet.pl


TECHNICAL SPECIFICATIONS **BEP-275**

ELECTRICAL PARAMETERS	STC
Maximum power [Wp]	275
Short circuit current [A]	9,27
Open circuit voltage [V]	38,72
Maximum power current [A]	8,75
Maximum power voltage [V]	31,44
Efficiency [%]	16,90

TEMPERATURE PARAMETERS	
NOCT (800 W/m ² , 1 m/s, AM 1.5, 20°C)	42±2 °C
Temperature coefficient current	0,038 %/C
Temperature coefficient voltage	-0,30 %/C
Temperature coefficient power	-0,40 %/C

PHYSICAL PARAMETERS	
Length [mm]	1640
Width [mm]	992
Thickness [mm]	40
Weight [kg]	18,1

COMPOSITION	
Front glass	Tempered 3,2 mm
Encapsulant	EVA film
Backsheet	Multilayer polyester
Frame	Anodised aluminium
Cells	Polycrystalline 5 BB
Cell dimensions [mm]	156,75 x 156,75
Number of cells [pcs.]	60(6x10)
JB protection class	IP67
Bypass diodes	3
Cables	1100 mm, 4 mm ²
Connectors	MC4 compatible

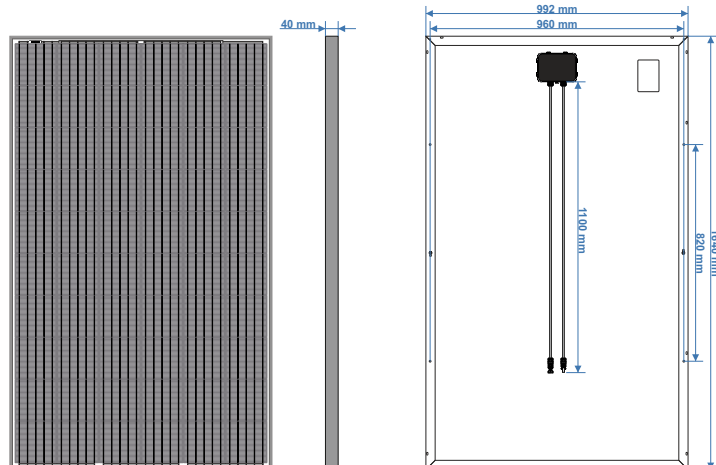

Note:

STC values measured under standard test conditions (STC): irradiance 1000 W/m², spectrum 1,5 AM, cell temperature 25 °C


NOCT values measured under test conditions: 800 W/m², spectrum AM 1.5, ambient temperature 20 °C, wind speed 1 m/s.

Measurement tolerance STC ± 2%; NOCT ± 5%.

APPLICATION PARAMETERS	
Power tolerance	0/+4,99 Wp
Application class	A
Safety class	II
Maximum system voltage	1000 VDC
Maximum mechanical load	5400 Pa
Maximum wind load	2400 Pa
Operating temperature	-40 /+85 °C
Reverse current protection	25 A
Salt mist corrosion test	IEC 61701
Ammonia corrosion test	IEC 62716
Hail test	V=23 m/s, φ=25 mm

PACKING	
Packing method	Cardboard box 1,7x1,2m
Quantity	26 pieces/pallet
Transport	30 pallets/truck

Bruk-Bet Solar linear power warranty

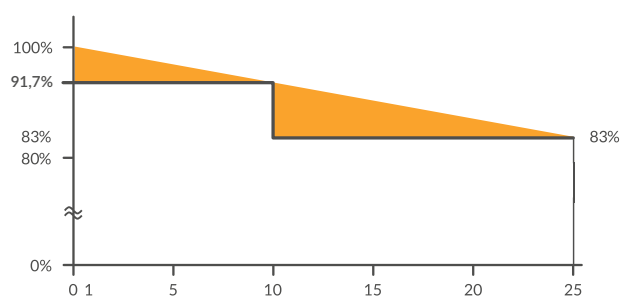

I-V CURVE

