




**POLY**

**25**  
Years

**GUARANTEED**

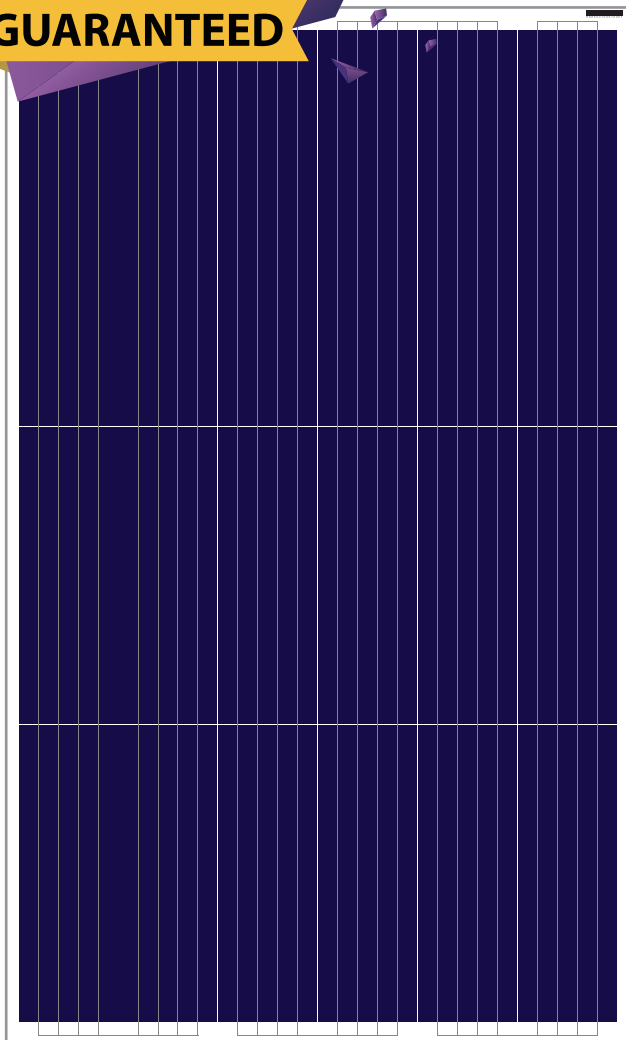


### ELECTRICAL DATA

Item No.	Pmax	Vmpp	Impp	Voc	Isc
HS280P-30	280W	32.50V	8.54A	38.80V	9.25A
HS275P-30	275W	32.30V	8.50A	38.50V	9.17A
HS270P-30	270W	32.10V	8.47A	38.20V	9.00A
HS265P-30	265W	31.40V	8.44A	38.00V	8.95A
HS260P-30	260W	31.00V	8.40A	37.80V	8.85A

### MECHANICAL CHARACTERISTICS

Solar Cell	polycrystalline (156 x 156 mm)
Cells Quantity	60 (6 x 10)
Dimensions	1650 x 992 x 40 / 35 mm
Glass	3.2 mm tempered glass
Frame	anodized aluminium alloy
Junction Box	TÜV Certified IP68
Series Fuse Rating	20A
Maximum System Voltage	1500V DCTÜV
Output Cables	1100 mm / 4.0 mm <sup>2</sup>
Test Standard Condition	AM=1.5 E=1000/m <sup>2</sup> TC=25°C
NOCT	45°C +/- 2°C
Temperature Coefficients:	Pmax -0.43%/°C; Voc -0.32%/°C; Isc 0.05%/°C

### I-V CURVE

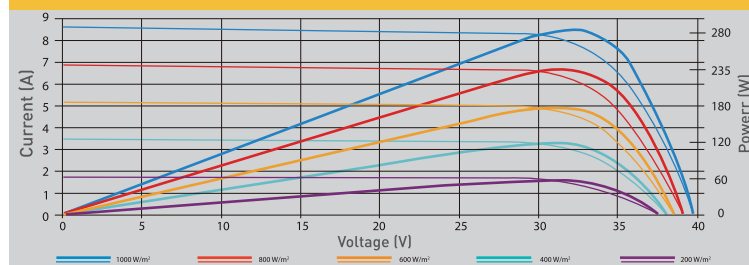

**HANOVER NEW ENERGY PTY LTD**  
7 Koorabel Place  
Baulkham Hills NSW 2153  
AUSTRALIA  
+61 (0) 881 215 838

**PT. HANOVER SOLAR INDONESIA**  
Jalan Budi Kemuliaan Blok VI,  
Luuk Baja, Batam 29432  
INDONESIA  
+62 (0) 811 776 8838



**HANOVER SOLAR GmbH**  
Herrenstrasse 13  
D30159 Hannover  
GERMANY  
+49 (0) 511 711 090 0539

**HANOVER SOLAR BV**  
Vijfhuizenweg 185  
4708 AJ Roosendaal  
NETHERLANDS  
+31(0) 165 203 842