



**Power range:**  
 from 290 to 330 Wp



**Positive tolerance:**  
 from 0 to +4,99 Wp



**Frame color range:**  
 RAL6005



**Backsheet color range:**  
 Black




**Glass color range:**  
 Green




**Fire resistance:**  
 class of reaction to fire 1 (UNI 9177)



**Warranty:**  
 12 year against manufacturing defects



**Cell and color:**  
 5BB Monocrystalline

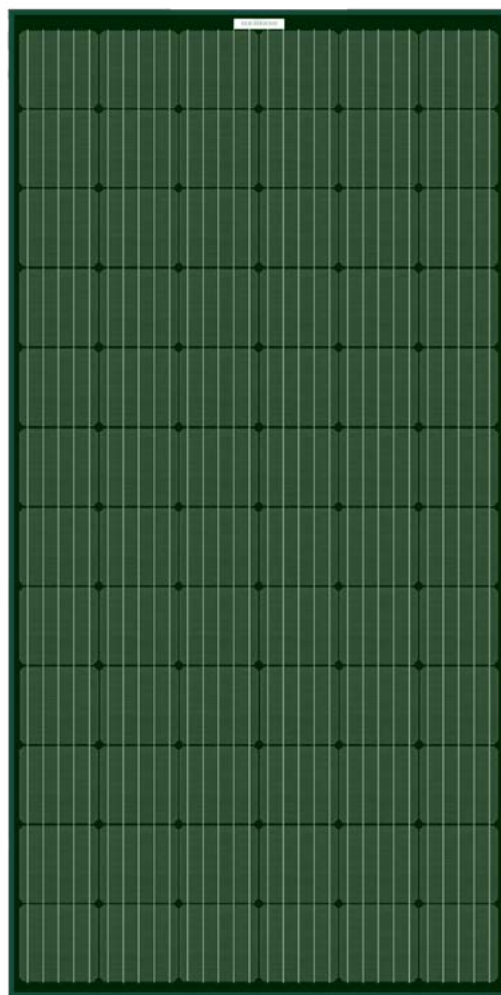

## Specifications

- Use of tempered glass anti-glare with low iron content and high quality for optimum light collection.
- Anodised aluminium frame which provides solidity and sturdiness to withstand constant loads and climatic stresses such as snow and ice with applied pressure max 5,4kN/m<sup>2</sup>
- NOCT = 45°C
- Temperature range from -40°C a 85°C
- Mechanical load on surface max 550 kg/m<sup>2</sup>
- Hail impact resistance ø 25mm a 86 km/h

## System certifications

- Corporate Quality Management EN ISO 9001:2008
- Environmental Management EN ISO 14001:2004
- Management of Health and Safety at the Workplace BS/OHSAS 18001:2007
- Certificates issued by TUV Rheinland ID:9105084080

## Product certifications

- IEC 61215:2005
- EN 61730-1/-2:2007
- Class of reaction to fire I (UNI 9177)
- Anti-corrosion saline IEC 61701
- Anti-corrosion ammonia IEC 62716
- PID Free - Classe A
- Safety class II
- Factory Inspection
- Production "made in Italy"
- EC Directives: EMC 2004/108/EC; 2006/95/EC low Voltage

## Measure VE372PVFG

• Length	1980 mm
• Width	1000 mm
• Height	40 mm
• Weight	21,5 kg
• Frame	Anodized or painted aluminium
• Glass thickness	3,2 mm

## Guarantees

- 12 year warranty against manufacturing defects\*
- 25 year linear warranty to 82.5% of the maximum declared power\*

\*If used and installed according to technical and operational instructions. The Company reserves the right to make changes to product specifications. This data sheet corresponds to the requirements of Standard EN50380. Rel.1 03/2019

## Behavior in standard test conditions STC\*

Power class (maximum value)	P <sub>max</sub>	290 Wp	300 Wp	310 Wp	320 Wp	330 Wp
Efficiency	η	14,65 %	15,15 %	15,66 %	16,16 %	16,67 %
Open-circuit voltage	V <sub>oc</sub>	45,47 V	45,64 V	45,81 V	45,98 V	46,17 V
Short-circuit current	I <sub>sc</sub>	8,71 A	8,89 A	9,07 A	9,25 A	9,48 A
Maximum power voltage	V <sub>mp</sub>	36,28 V	36,46 V	36,65 V	36,83 V	37,02 V
Current at maximum power	I <sub>mp</sub>	8,13 A	8,34 A	8,55 A	8,76 A	9,01 A

\* Note - Powers about the photovoltaic module with white backsheet, under standard conditions: Irradiation 1000 W/mq - Module temperature = 25°C - Air mass AM 1,5  
 Measurement tolerance solar simulator class A (- / + 2%) in accordance with IEC 60904-9

## NOCT conditions behavior\*\*

Power class (maximum value)	P <sub>max</sub>	218,33 Wp	226,51 Wp	234,77 Wp	242,83 Wp	252,67 Wp
Open-circuit voltage	V <sub>oc</sub>	39,42 V	39,57 V	39,73 V	39,88 V	40,07 V
Short-circuit current	I <sub>sc</sub>	7,12 A	7,3 A	7,48 A	7,66 A	7,89 A
Maximum power voltage	V <sub>mp</sub>	33,13 V	33,31 V	33,49 V	33,68 V	33,87 V
Current at maximum power	I <sub>mp</sub>	6,59 A	6,8 A	7,01 A	7,21 A	7,46 A

\*\*Note - Powers about the photovoltaic module with white backsheet, under NOCT conditions: Irradiation 800 W/mq - Module temperature = 44,5°C - Air mass AM 1,5

## Materials used

Cells per module	60
Cell type	5BB Monocrystalline
Cell size	156,75 mm x 156,75 mm
Front side	Anti-glare tempered glass (EN 12150)
Backsheet glass	Red
Backsheet color	Black

## Parameters for optimal integration into the system

Maximum system voltage class II	1000 V
Load capacity of reverse current	15 A
High snow loads (standard IEC 61215)	max 5,4 kN/m <sup>2</sup>
Number of bypass diodes	3

## More Info

Sorting tolerance P <sub>max</sub>	0/+4,99 W
Type of protection (IP)	IP65
Connector	MC4
Cable	Solar cable 4mm <sup>2</sup> - Length 1m

## Thermal characteristics

NOCT	45 +/-2°C
TC I <sub>sc</sub>	4,894 mA/°C
TC U <sub>oc</sub>	-0,118 V/°C
TC P <sub>mpp</sub>	-0,44 %/°C

