


YLM
G/G
72CL

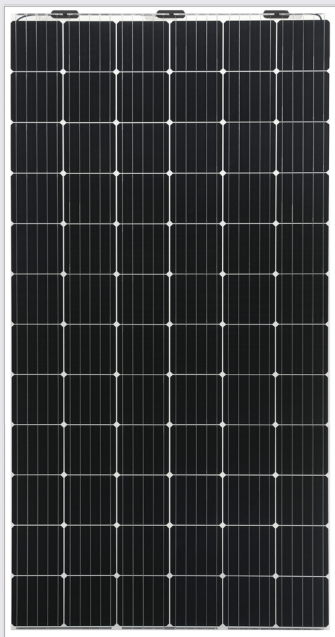

19.9%
CELL EFFICIENCY

10 YEAR
PRODUCT WARRANTY

0-5W
POWER TOLERANCE

DOUBLED STRENGTH FOR MULTIPLIED RELIABILITY

Whenever the conditions are requiring a more robust solution, our modules are the right choice. By the additional layer glass on the rear side, our modules are much more robust and reliable. Carefully chosen materials, state of the art solar cells and our experience in manufacturing ensure in addition the high product quality.


+ $\frac{W}{m^2}$ High Power Density
High efficiency, multicrystalline silicon cells with high transmission and textured glass could minimize installation costs and maximize kWh output of your system per unit area.

Extended Size
Our large-format module facilitates system-level cost savings through reduced handling and installation times.

Durability
Durable PV modules, independently tested for harsh environmental conditions such as exposure to salt mist, ammonia, or known PID risk factors.

Optimal Self-cleaning
Optimal self-cleaning due to frameless module design.

30 Years Linear Warranty

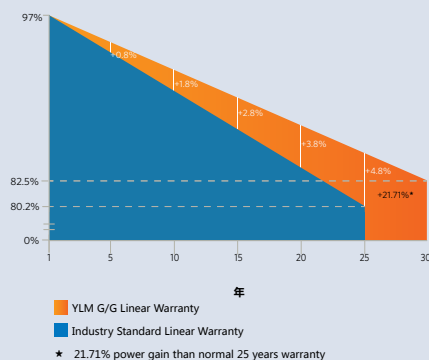

Yingli Green Energy

Yingli Green Energy Holding Company Limited (NYSE: YGE), known as “Yingli Solar”, is one of the world’s leading solar panel manufacturers with the mission to provide affordable green energy for all. Yingli Solar makes solar power possible for communities everywhere by using our global manufacturing and logistics expertise to address unique local challenges.

YLM G/G 72CL

Electrical Performance

Electrical parameters at Standard Test Conditions (STC)

Module type	YLxxxDG2536L-2 (xxx=Pmax)							
Power output	P_{max}	W	355	350	345	340	335	330
Power output tolerances	ΔP_{max}	W	0 / + 5					
Module efficiency	η_m	%	18.1	17.9	17.6	17.4	17.1	16.8
Voltage at P_{max}	V_{mpp}	V	38.6	38.3	38.0	37.7	37.4	37.1
Current at P_{max}	I_{mpp}	A	9.20	9.14	9.08	9.02	8.96	8.90
Open-circuit voltage	V_{oc}	V	46.2	46.0	45.8	45.6	45.4	45.2
Short-circuit current	I_{sc}	A	9.71	9.66	9.61	9.56	9.51	9.46

STC: 1000W/m² irradiance, 25°C module temperature, AM1.5g spectrum according to EN 60904-3.
Average relative efficiency reduction of 3.0% at 200W/m² according to EN 60904-1.

Electrical parameters at Nominal Module Operating Temperature (NMOT)

Power output	P_{max}	W	267.3	263.5	259.8	256.0	252.2	248.5
Voltage at P_{max}	V_{mpp}	V	36.3	36.0	35.8	35.5	35.2	34.9
Current at P_{max}	I_{mpp}	A	7.36	7.31	7.26	7.22	7.17	7.12
Open-circuit voltage	V_{oc}	V	43.7	43.5	43.3	43.1	42.9	42.7
Short-circuit current	I_{sc}	A	7.82	7.78	7.74	7.70	7.66	7.62

NMOT: temperature near maximum power point at 800W/m² irradiance, 20°C ambient temperature, 1m/s wind speed.

THERMAL CHARACTERISTICS

Nominal module operating temperature	NMOT	°C	39 +/- 2
Temperature coefficient of P_{max}	γ_{Pmax}	%/°C	-0.42
Temperature coefficient of V_{oc}	β_{Voc}	%/°C	-0.32
Temperature coefficient of I_{sc}	α_{Isc}	%/°C	0.05

OPERATING CONDITIONS

Max. system voltage	1500V _{DC}
Max. series fuse rating	15A
Limiting reverse current	15A
Operating temperature range	-40°C to 85°C
Max. static load, front (e.g., snow)*	5400Pa
Max. static load, back (e.g., wind)	2400Pa
Max. hailstone impact (diameter / velocity)	25mm / 23m/s

*Load bearing capacity depends on installation.

CONSTRUCTION MATERIALS

Front cover (material / thickness)	low-iron semi-tempered glass / 2.5mm×2
Cell (quantity / material / dimensions / number of busbars)	72 / monocrystalline silicon / 156.75mm x 156.75mm (+/-0.25) / 4 or 5
Frame (material)	N / A
Junction box (protection degree)	≥ IP67
Cable (length / cross-sectional area)	200mm / 4mm ²
Plug connector (type / protection degree)	RH 05-8 / IP67 or LSC-R1 / IP68 or LSC-R4 / IP68

- Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed.
- The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.

QUALIFICATIONS & CERTIFICATES

IEC 61215, IEC 61730, CE, ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007, SA 8000




GENERAL CHARACTERISTICS

Dimensions (L / W / H)	1975mm / 992mm / 6mm
Weight	27.5kg

PACKAGING SPECIFICATIONS

Number of modules per pallet	30
Number of pallets per 40' container	22
Packaging box dimensions (L / W / H)	2097mm / 1140mm / 1183mm
Box weight	900kg

Unit: mm

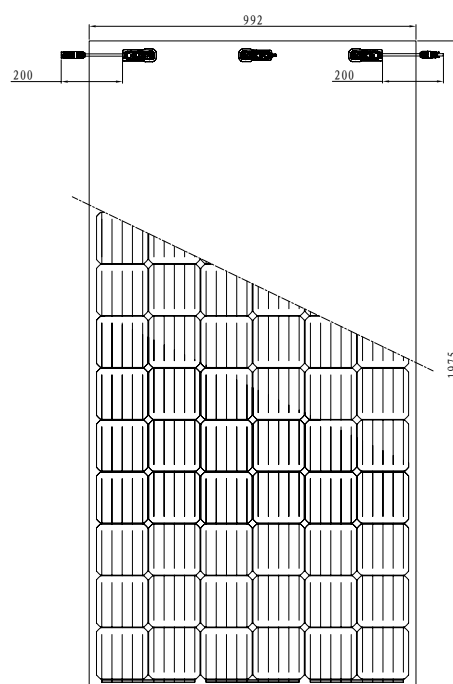

Warning: Read the Installation and User Manual in its entirety before handling, installing and operating Yingli Solar modules.

Yingli Partners:

Yingli Green Energy Holding Co., Ltd.

service@yingli.com

Tel: +86-312-2188055

YINGLISOLAR.COM

