



# 单晶硅太阳能电池组件

## 355~380瓦

### MONOCRYSTALLINE SOLAR MODULE 355~380Watt

#### 全球领先的质量


#### Global leading quality

以持续为社会、客户、企业、员工创造价值为核心理念，力争成为行业顶尖的光伏产品领导品牌。

Based on the core idea of creating value for society, customers and enterprises, we strive for becoming the leading supplier of photovoltaic products.

#### 产品 || 质保

#### PRODUCT | WARRANTY&INSURANCE

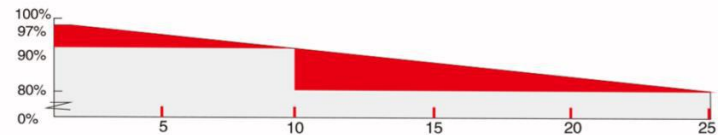

第一年输出功率不低于标称功率的97%  
Not less than 97% of nominal power in the first year.  
第二年到第二十五年每年功率衰减不超过标称功率的0.7%  
Annual power attenuation does not exceed 0.7% of nominal power from the 2nd year to the 25th year.  
产品的材料和品质保证10年。  
10-year material and workmanship warranty

#### 产品 || 管理体系 || 认证

#### PRODUCT&MANAGEMENT SYSTEM CERTIFICATES

产品质量管理体系认证ISO9001:2008  
环境管理体系认证ISO14001:2004  
IEC61215/IEC61730  
TUV/JET/CEC  
职业健康安全管理体系认证 BS OHSAS 18001:2007

CERTIFICATIONS&STANDARD  
IEC 61215/IEC61730 : CEC/CE/TUV/JET  
ISO9001 : 2008 | QUALITY MANAGEMENT SYSTEM  
ISO14001 : 2004 | STANDARD FOR ENVIRONMENTAL MANAGEMENT SYSTEM  
BS OHSAS 18001 : 2007



#### 关于丰源


#### About Solar Fab


镇江丰源新能源科技有限公司成立于2006年6月26日，公司现有员工600余人，主要从事于太阳能光伏组件的制造、销售及相关技术的研发。2019年产能达到1GW，公司位于江苏省镇江扬中市油坊镇明珠南路1号；占地260亩。


Zhenjiang Fengyuan New Energy Science & Technology Co.,Ltd. was founded in 2006, with over 600 employees, covering an area of 260 acres, the company mainly specializes in solar photo voltaic module manufacturing, sales and R&D. Our factory is located in No.1 South Mingzhu Road, Youfang Town, Yangzhong, Jiangsu, China. And our capacity reached 1GW in 2019.


#### 产品 || 主要特征


#### PRODUCT KEY FEATURES

 组件效率达到19.6%  
Excellent Module Efficiency  
Up To 19.6%

 组件正公差+5%，  
保证更高的功率输出  
Positive Tolerance Of Up To 5% Delivers Higher Outputs  
Reliability

 完美的弱光效应，保证弱光条件下更好的组件性能  
Excellent weak light performance  
Excellent performance under low light conditions

 串联电流工艺，保证最大的系统输出，减少功率损耗2%  
Current sorting process  
System output maximized by reducing mismatch losses up to 2% with modules sorted & packaged by amperage

 防水等级IP67，保证组件长期稳定性  
IP67 junction box available  
long-term weather endurance

### 标准测试条件下的电性能参数

#### ELECTRICAL DATA | STC

标准测试条件下的电性能参数 Electrical Data	FY355S -24/Vd	FY360S -24/Vd	FY365S -24/Vd	FY370S -24/Vd	FY375S -24/Vd	FY380S -24/Vd
峰值功率 Maximum Power at STC(Pmax)	355W	360W	365W	370W	375W	380W
峰值功率电压 Optimum Operating Voltage(Vmp)	38.7V	39.1V	39.3V	39.8V	40.0V	40.2V
峰值功率电流 Optimum Operating Current(Imp)	9.18A	9.21A	9.29A	9.30A	9.38A	9.46A
开路电压 Open Circuit Voltage(Voc)	47.5V	47.7V	47.9V	48.2V	48.5V	48.7V
短路电流 Short Circuit Current(Isc)	9.63A	9.69A	9.76A	9.80A	9.83A	9.86A
组件效率 Module Efficiency	18.3%	18.6%	18.8%	19.1%	19.3%	19.6%
组件工作温度 Operating Module Temperature	-40℃to+85℃					
最大系统电压 Maximum System Voltage	1000 V DC(IEC)					
最大保险丝额定值 Maximum Series Fuse Raing	20A					
组件功率公差 Power Tolerance	0/+5%					

STC: 辐照度1000W/m<sup>2</sup>, 组件温度25℃, 大气质量AM1.5, 根据(IEC 60904-9), 功率测试误差范围±3%  
 STC: Irradiance 1000 W/m<sup>2</sup>, module temperature 25℃, AM=1.5,  
 Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/-3%

Noct	FY355S -24/Vd	FY360S -24/Vd	FY365S -24/Vd	FY370S -24/Vd	FY375S -24/Vd	FY380S -24/Vd
峰值功率 Maximum Power at STC(Pmax)	261W	264W	268W	273W	276W	279W
峰值功率电压 Optimum Operating Voltage(Vmp)	35.6V	35.8V	36.0V	36.2V	36.3V	36.4V
峰值功率电流 Optimum Operating Current(Imp)	7.33A	7.39A	7.46A	7.56A	7.62A	7.69A
开路电压 Open Circuit Voltage(Voc)	43.2V	43.4V	43.6V	43.8V	44.0V	44.2V
短路电流 Short Circuit Current(Isc)	7.76A	7.82A	7.89A	7.96A	8.02A	8.08A

NOCT: Irradiance 800 W/m<sup>2</sup>, ambient temperature 20℃, AM=1.5, wind speed 1 m/s;  
 Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

#### 温度特征 Temperature Characteristics

NOCT标准下的电池片温度 Nominal Operating Cell Temperature (NOCT)	45 ± 2℃
峰值功率的温度系数 Temperature Coefficient of Pmax	-0.43%/℃
开路电压的温度系数 Temperature Coefficient of Voc	-0.33%/℃
短路电流的温度系数 Temperature Coefficient of Isc	0.067%/℃


#### 结构材料 Mechanical Characteristics

太阳能电池片 Solar Cell	单晶 156.75 x 156.75mm Monocrystalline silicon 156.75 x 156.75mm
电池片数量 No. of Cells	72 (6 x 12)
组件尺寸 Dimensions	1956 x 992 x 40mm
组件重量 Weight	21.5kg
玻璃 Front Glass	低铁钢化玻璃3.2mm 3.2mm tempered glass
边框 Frame	阳极氧化铝合金 Anodized aluminium alloy
接线盒 (防护等级) Junction Box	IP67 rated (3 bypass diodes)
线缆 (标准/横截面积/长度) Output Cables	TUV(2 PFG 1169/08.07) 4.0mm <sup>2</sup> , symmetrical lengths(-) 700mm and (+)700mm
接插件 Connectors	通灵/JINGKE TL connectors


包装信息 Packing Configuration	40' HC	20' GP
每托盘的数量 (片) Pieces per pallet	30/27	30/27
每集装箱的托盘数量 (片) Pallets per container	28/28	12/12
每货柜的数量 (片) Pieces per container	840/756	360/324

### 组件结构图

#### MODULE | ENGINEERING DRAWING

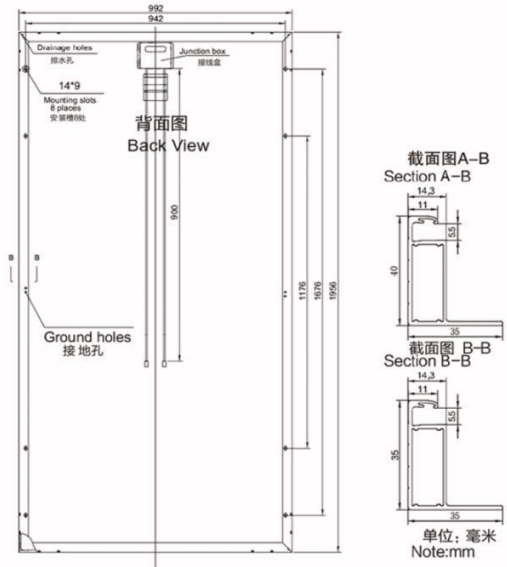

### 电流-电压 & 功率-电压曲线图 (380S-20) Current-Voltage & Power-Voltage Curve (380S-20)

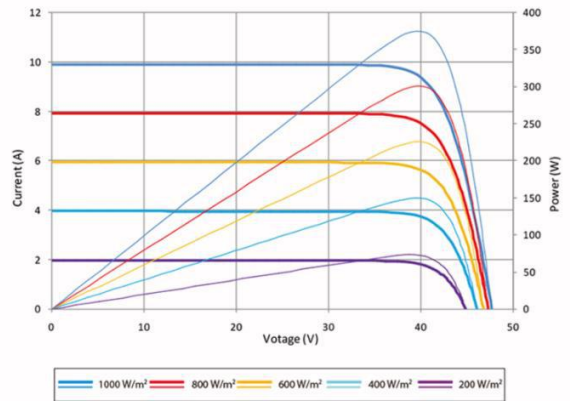

### 信息栏 Information bar



产品规格改变时不另行通知