



20.6%

Module efficiency up to 20.6%

MWT Solar Cell

- New cell structure and different manufacturing process.
- No bus-bar on the front. 3% less shadow and better use of sunlight.
- Effectively avoid the micro crack caused by the pressure between cell edge and ribbon.
- Compatible with other cell types including PERC, HIT, Black Silicon etc.

Insured by PICC and LLOYD'S

PICC **LLOYD'S**

Comprehensive Qualifications & Certifications

- ★ IEC 61215, IEC 61730, IEC 61701, IEC 62716, IEC 60068-2-68.
- ★ CQC&CGC Top Runner Advanced Technology Certification (4A class)
- ★ ISO 9001: 2015 Quality Management System
- ★ ISO 14001: 2015 Environment Management System
- ★ OHSAS 18001: 2007 Occupation Health Safety Management System
- ★ TÜV NORD and UK NQA Quality System Certification



Benchmark II SPP370-400M72

370-400W MWT Module

Mono 72 Cells

Benchmark MWT PV Module



Higher Efficiency

The highest efficiency of the series is up to 20.6%.



Higher Yield

Higher power generation on the same installation.



Lower Degradation

At least 98% of the initial effective output at the 1st year and 80% at the 30th year.



Heat-Resistant

Remain peak performance in hot days thanks to the improved temperature coefficient as low as $-0.36\%/^{\circ}\text{C}$.



Corrosion-Resistant


Certified for Ammonia Resistance and Salt Mist Corrosion to maximum severity level 6.



Anti-PID

Certified for Anti-PID under $85^{\circ}\text{C}/85\%\text{RH}$, for 288hrs.

30 Years Performance Warranty

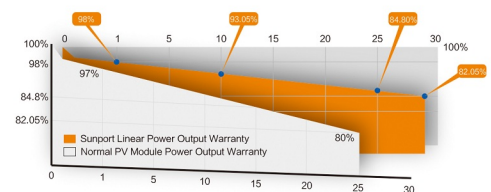

Electrical Characteristics at Standard Test Conditions(STC)

Spec/Model	Unit	SPP370M72	SPP375M72	SPP380M72	SPP385M72	SPP390M72	SPP395M72	SPP400M72
Max-Power(Pm)	W	370	375	380	385	390	395	400
Power Tolerance	%				0~+3%			
Max-Power Voltage(Vm)	V	38.3	38.5	38.7	38.9	39.2	39.4	39.7
Max-Power Current(Im)	A	9.67	9.75	9.83	9.90	9.96	10.03	10.08
Open-Circuit Voltage(Voc)	V	47.0	47.2	47.4	47.6	47.8	48.0	48.2
Short-Circuit Current(Isc)	A	10.09	10.15	10.21	10.27	10.34	10.41	10.48
Module Efficiency(η_m)	%	19.1	19.3	19.6	19.8	20.1	20.4	20.6

STC:AM=1.5, Irradiation 1000W/m², Module Temperature 25°C

Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

Spec/Model	Unit	SPP370M72	SPP375M72	SPP380M72	SPP385M72	SPP390M72	SPP395M72	SPP400M72
Max-Power(Pm)	W	276	279	283	287	290	294	298
Max-Power Voltage(Vm)	V	35.0	35.1	35.3	35.5	35.6	35.8	36.0
Max-Power Current(Im)	A	7.89	7.95	8.02	8.09	8.15	8.22	8.28
Open-Circuit Voltage(Voc)	V	42.9	43.0	43.1	43.2	43.4	43.5	43.7
Short-Circuit Current(Isc)	A	8.25	8.31	8.37	8.43	8.50	8.55	8.61

NMOT: Irradiation 800W/m², ambient temperature 20°C, Wind Speed 1m/s

Temperature Coefficient

Nominal Module Operating Temperature	43 ± 2°C
Temperature coefficient of Pmax	-0.36%/°C
Temperature coefficient of Voc	-0.28%/°C
Temperature coefficient of Isc	0.06%/°C

Package


Container Size	Quantity(pcs)	Quantity(pallet)
20' GP	260	10
40' GP	624	24
40' HC	624	24

Mechanical Property


Dimension(L × W × H)	1956mm×992mm×40mm
Weight	22.5kg
Glass Type	High Transmittance Anti-reflective Coated Tempered Glass /3.2mm
Solar Cell	72(12x6)/Mono/6inches
Encapsulant	EVA
Frame	Anodized Aluminum Alloy / Silver
Junction Box	IP65 & IP67
Cable	1200mm / 4mm ²
Connector	MC4 Compatible

I-V Curve

I-V Curve at different irradiation (SPP385M72)

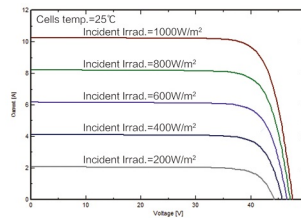

I-V Curve at different temperature (SPP385M72)

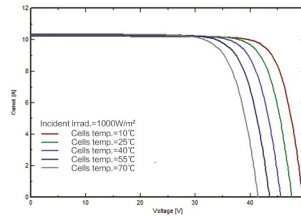

Module Size

