









# SOLAR MODULE EGE-200P-48 POLYCRYSTALLINE MODULE 200 W / 48 Cells / 5 Bus bars



Eco Green Energy's modules are only made of grade A solar cells with a very high efficiency and ensured more than 25 years lifespan.

## KEY FEATURES


-  5 bus bars cells, with efficiency up to 22.8 %
-  IP65 junction box for long term weather endurance
-  High quality aluminum frame, resisting load up to 5400 Pa and wind pressure up to 2400 Pa
-  High transmissivity, low-iron tempered glass
-  High performance in low-light environment
-  Double EL test before and after lamination
-  **25 YEARS** **OUTPUT POWER WARRANTY**
-  **12 YEARS** **PRODUCT WARRANTY**

## CERTIFICATES

IEC 61215 / IEC 61730 / CE  
ISO 9001:2015

## LINEAR PERFORMANCE WARRANTY

12-Year Product Warranty • 25-Year Linear Power Warranty

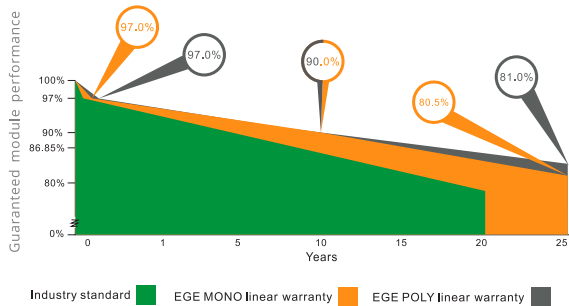

## ELECTRICAL DATA AT STC\*

Power output (Pmax)	200 W
Power tolerance	0~+5 W
Module efficiency	15.27 %
Maximum power voltage (Vmp)	24.36 V
Maximum power current (Imp)	8.21 A
Open circuit voltage (Voc)	30.01 V
Short circuit current (Isc)	8.68 A

\*Standard Test Conditions: Irradiance: 1 000 W / m<sup>2</sup>  
Cell temperature: 25 °C • AM: 1.5

## ELECTRICAL DATA AT NOCT\*

Power output (Pmax)	147.96 W
Maximum power voltage (Vmp)	22.50 V
Maximum power current (Imp)	6.57 A
Open circuit voltage (Voc)	27.86 V
Short circuit current (Isc)	7.05 A

\*Nominal Operating Cell Temperature: Irradiance: 800 W / m<sup>2</sup>  
Ambiant temperature: 20 °C • AM: 1.5 • Wind speed: 1 m/s

## TEMPERATURE CHARACTERISTICS

NOCT	45 °C ±2 °C
Temperature coefficient of Pmax	-0.41%/°C
Temperature coefficient of Voc	-0.31%/°C
Temperature coefficient of Isc	+0.06%/°C


## MAXIMUM RATINGS

Operating temperature range	-45 °C ~+85 °C
Maximum system voltage	1500 V
Max series fuse rating	15 A
Max front load (e.g.: snow)	5 400 Pa
Max back load (e.g.: wind)	2 400 Pa


## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline (156x156 mm)
Number of cells	48
Dimensions	1320x992x35mm
Weight	15.0 kg
Glass	3.2 mm tempered glass
Frame	Anodized aluminium alloy
Junction box	IP65
Cable	0.9 m
Connector	MC4 or MC4 compatible

## EGE-200M-48 / I-V CURVES

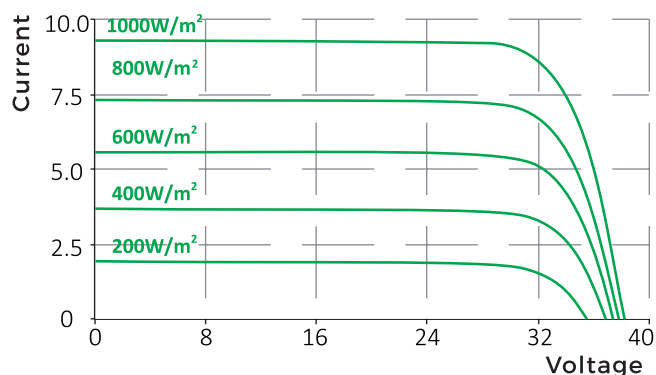

## ENGINEERING DRAWINGS (mm)

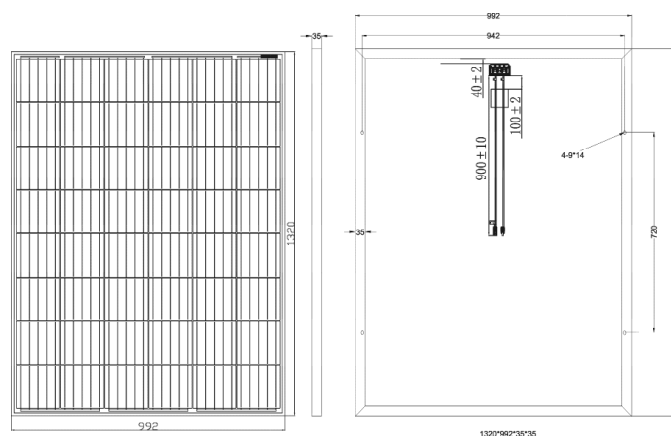

## PACKAGING

Type	Pcs/ Type	Weight
Per pallet	30 pcs	480 kg
20ft GP Container	460 pcs	7.4 t
40ft GP Container	1000 pcs	16.0 t
40ft HQ Container	1150 pcs	18.4 t