



Benchmark II SPP375-400M72

375-400W MWT Module

Mono 72 Cells

20.6%

Module efficiency up to 20.6%

Benchmark MWT PV Module


- Higher Efficiency**
 The highest efficiency of the series is up to 20.6%.
- Higher Yield**
 Higher power generation on the same installation.
- Anti-PID**
 Certified for Anti-PID under 85°C/85%RH, for 288hrs.
- Lower Degradation**
 At least 98% of the initial effective output in the 1st year and 82% in the 30th year.
- Corrosion-Resistant**
 Certified for Ammonia Resistance and Salt Mist Corrosion.
- Heat-Resistant**
 Improved temperature coefficient as low as $-0.36\%/^{\circ}\text{C}$.

Reinsurance Coverage for 30 Years



Insured by PICC and LLOYD'S

PICC LLOYD'S

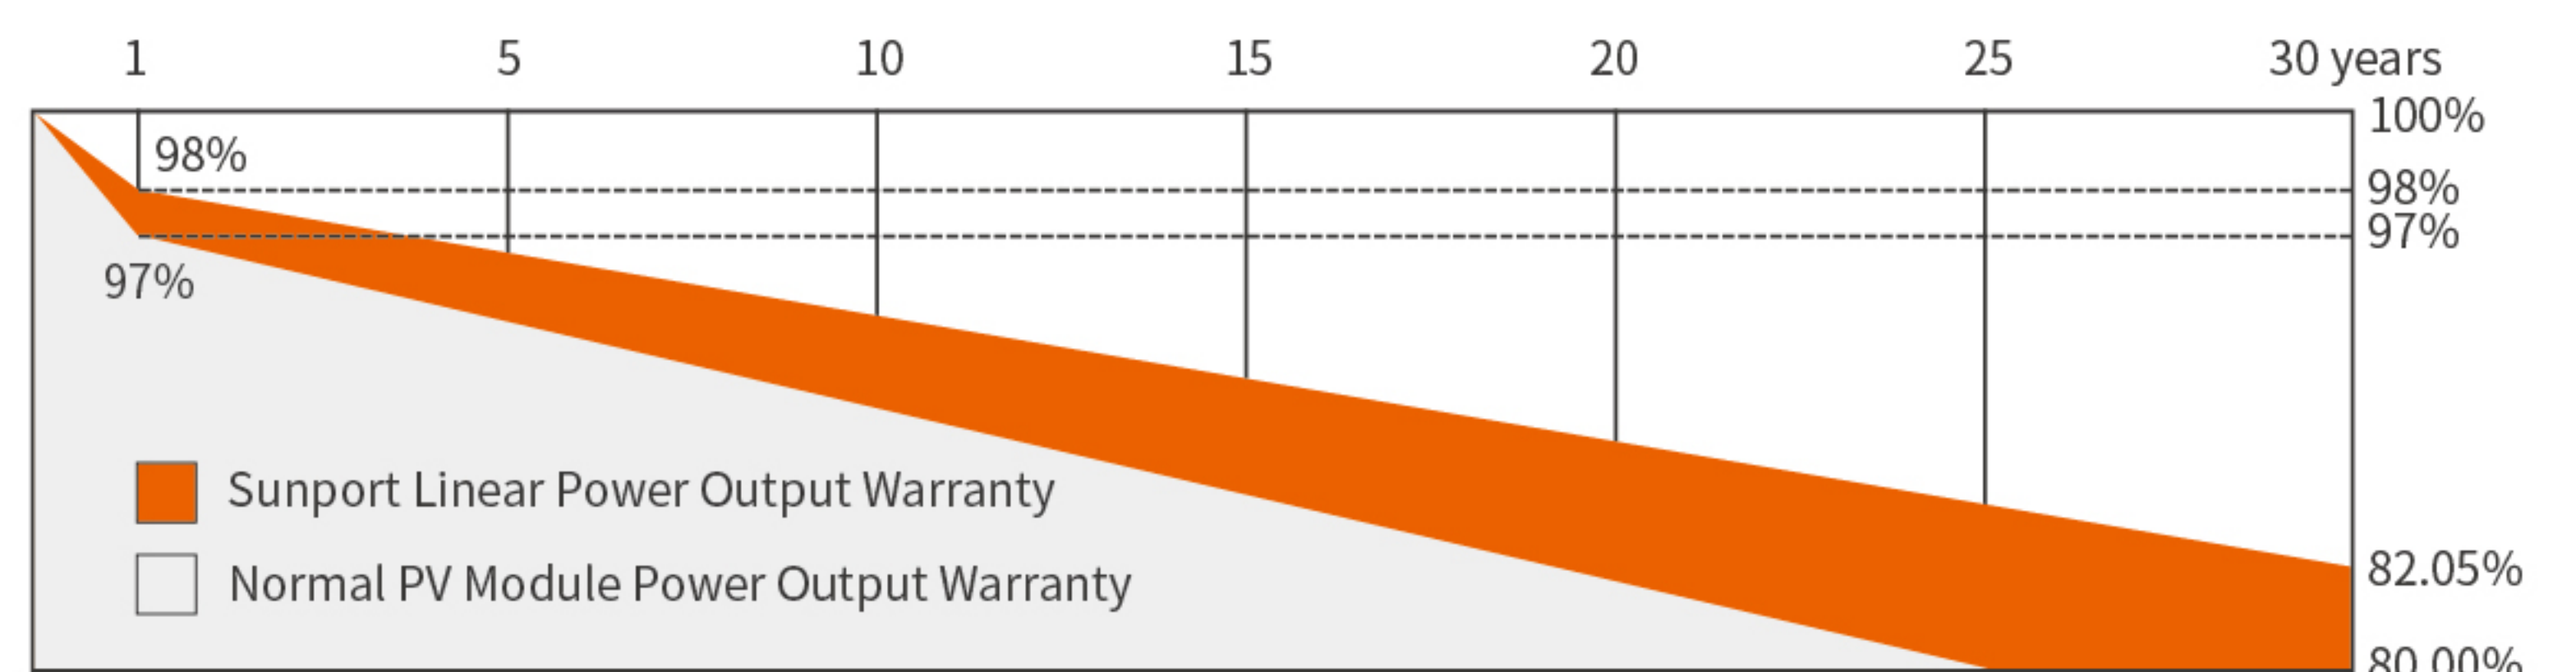

※1st year degradation less than 2%, 30 years linear power output 82% guaranteed.

Comprehensive Qualifications & Certifications

- ★IEC 61215, IEC 61730, IEC 61701, IEC 62716, IEC 60068-2-68.
- ★ISO 9001:2015 Quality Management System
- ★OHSAS 18001:2007 Occupation Health Safety Management System
- ★CQC&CGC Top Runner Advanced Technology Certification (4A class)
- ★ISO 14001:2015 Environment Management System
- ★ TUV NORD and UK NQA Quality System Certification



Electrical Characteristics at Standard Test Conditions(STC)

Spec/Model	Unit	SPP375M72	SPP380M72	SPP385M72	SPP390M72	SPP395M72	SPP400M72
Max-Power(Pm)	W	375	380	385	390	395	400
Power Tolerance	%	0~+3%					
Max-Power Voltage(Vm)	V	38.5	38.7	38.9	39.2	39.4	39.7
Max-Power Current(Im)	A	9.75	9.83	9.90	9.96	10.03	10.08
Open-Circuit Voltage(Voc)	V	47.2	47.4	47.6	47.8	48.0	48.2
Short-Circuit Current(Isc)	A	10.15	10.21	10.27	10.34	10.41	10.48
Module Efficiency(ηm)	%	19.3	19.6	19.8	20.1	20.4	20.6
STC:AM=1.5, Irradiation1000W/m ² , Module Temperature25°C							

Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

Spec/Model	Unit	SPP375M72	SPP380M72	SPP385M72	SPP390M72	SPP395M72	SPP400M72
Max-Power(Pm)	W	279	283	287	290	294	298
Max-Power Voltage(Vm)	V	35.1	35.3	35.5	35.6	35.8	36.0
Max-Power Current(Im)	A	7.95	8.02	8.09	8.15	8.22	8.28
Open-Circuit Voltage(Voc)	V	43.0	43.1	43.2	43.4	43.5	43.7
Short-Circuit Current(Isc)	A	8.31	8.37	8.43	8.50	8.55	8.61
NMOT: Irradiation800W/m ² , ambient temperature20°C, Wind Speed1m/s							

Temperature Coefficient

Nominal Module Operating Temperature	43±2°C
Temperature coefficient of Pmax	-0.36%/°C
Temperature coefficient of Voc	-0.28%/°C
Temperature coefficient of Isc	0.06%/°C

Package

Transportation	Container Size	Quantity(pcs)	Quantity(per pallet)
Container	20' GP	270	27
Container	40' HC	648/696	27

Mechanical Property


Dimension(L×W×H)	1956mmx992mmx40mm
Weight	22.5kg
Glass Type	High Transmittance Anti-reflective Coated Tempered Glass /3.2mm
Solar Cell	72(12x6)/Mono/158.75mm
Encapsulant	EVA
Frame	Anodized Aluminum Alloy / Silver
Junction Box	IP67&IP68
Cable	1200mm / 4mm ²
Connector	MC4 Compatible

Operating Conditions


Max System Voltage	1000V(TUV)
Max Fuse Rated Current	15A
Operating Temperature Range	-40°C~+85°C
Mechanical Load	5400Pa (front) /2400Pa (rear)
Max Allowable Hail Load	φ25mm hail, from 1m of distance at 23 m/s
Application Class	Class A

I-V Curve

I-V Curve at different irradiation (SPP385M72)

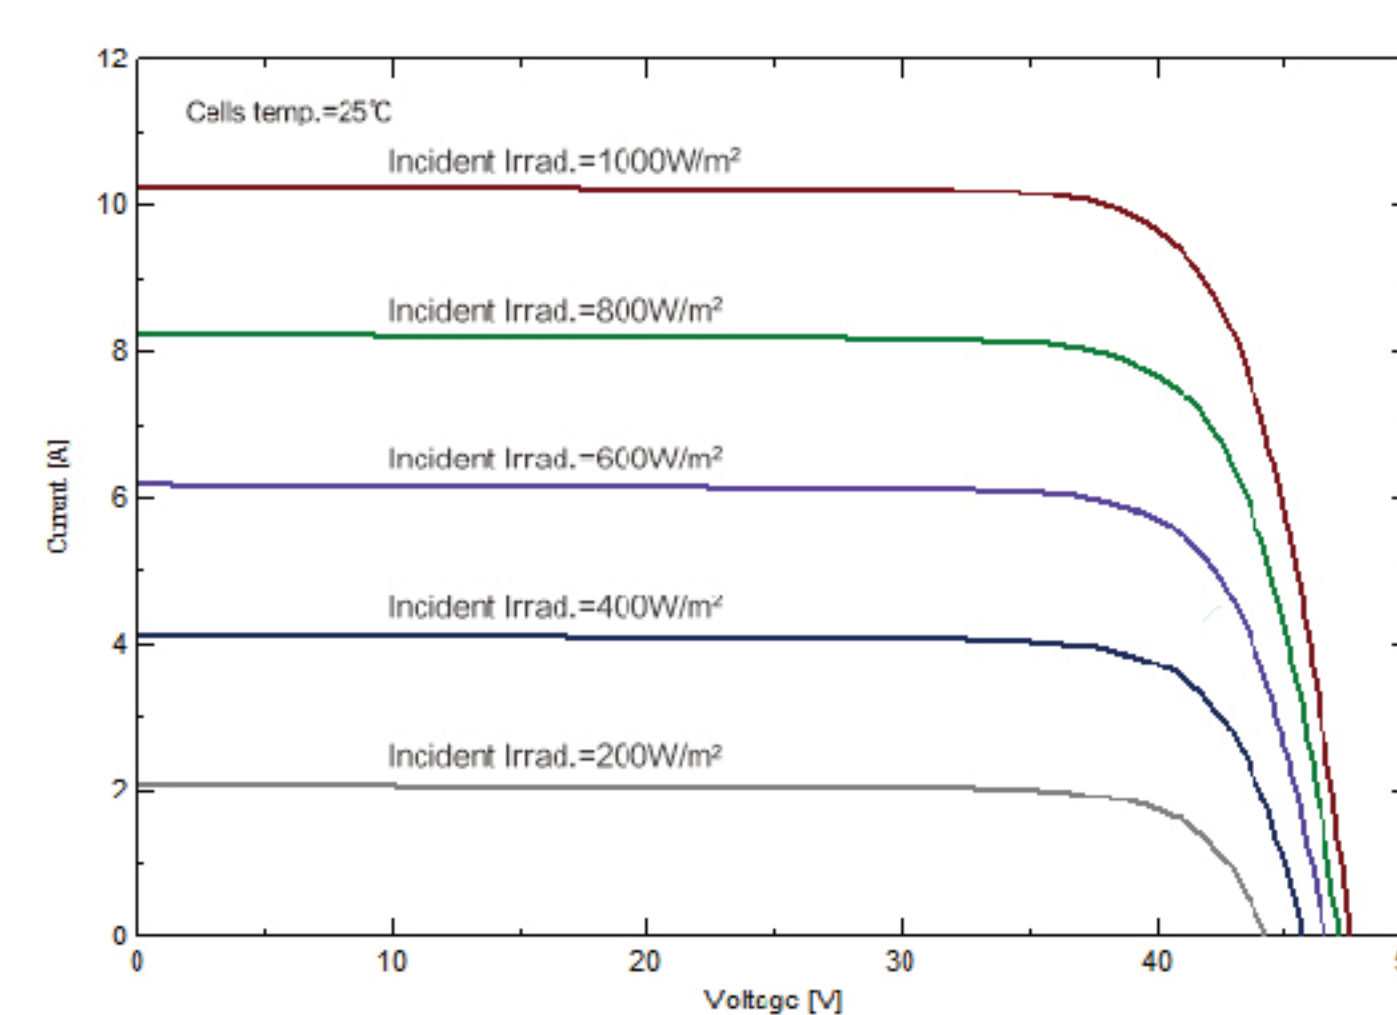

I-V Curve at different temperature (SPP385M72)

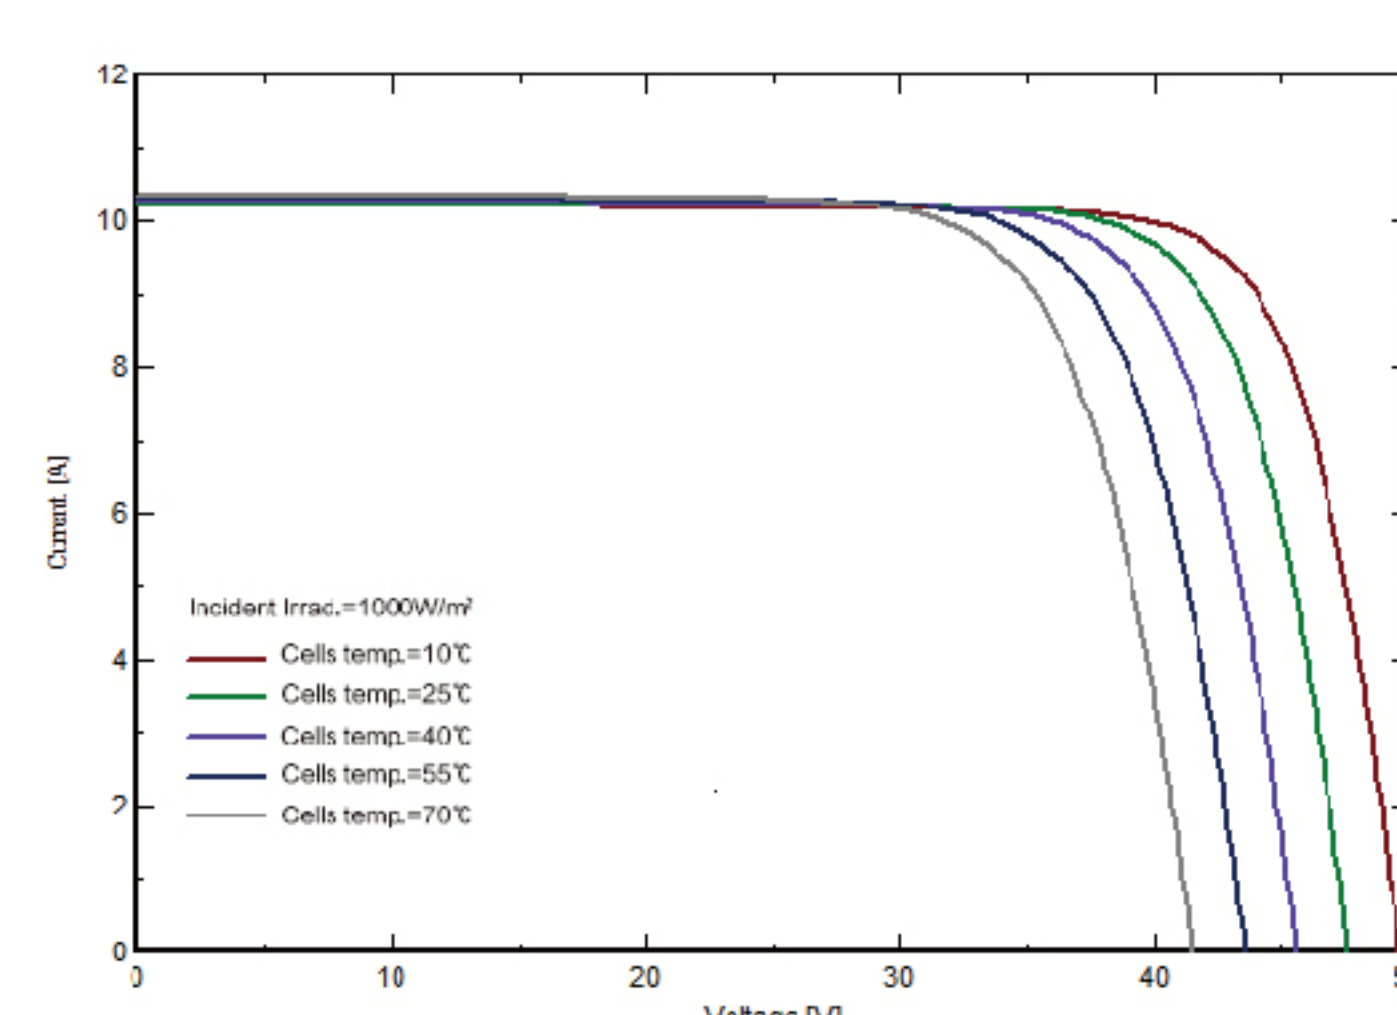

Module Size

