

AOX-72MH/PRO

430~450W Mono Module


High Efficiency

Higher Output Power


Low LID Mono PERC

Lower Temperature Coefficient

With Half-cell Technology

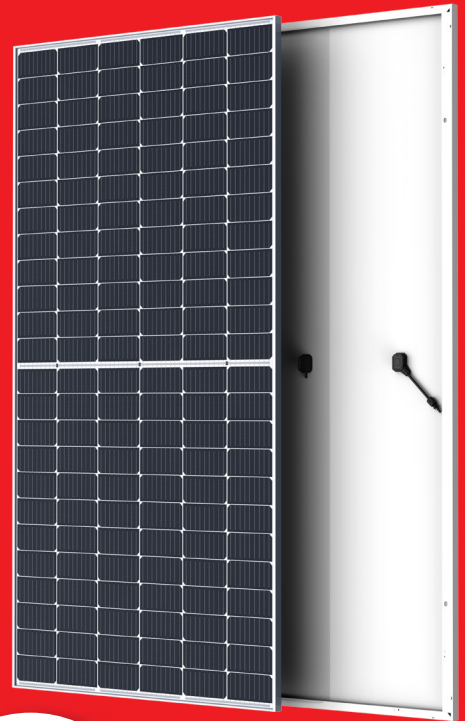

12-year Warranty for Materials and Processing;
25-year Warranty for Extra Linear Power Output

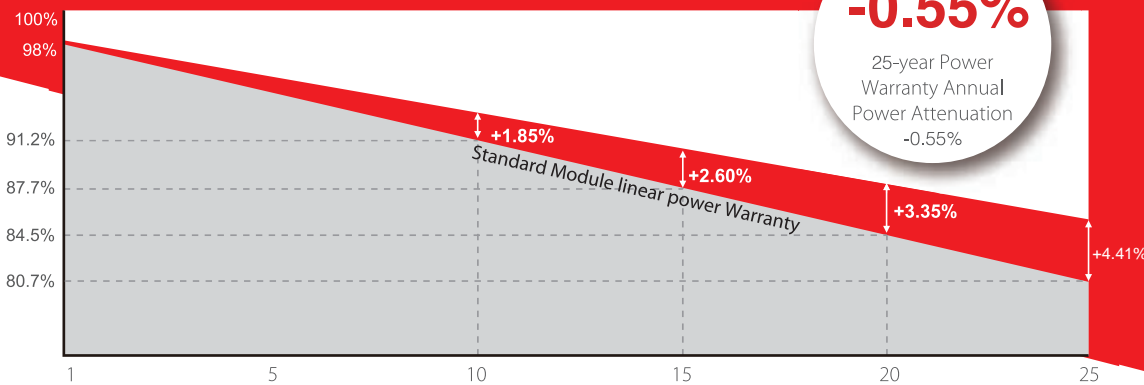

-0.55%

25-year Power
Warranty Annual
Power Attenuation
-0.55%

Complete System and Product Certifications

IEC 61215, IEC 61730
ISO 9001:2008
ISO 14001:2004
OHSAS 18001:2007



Positive power tolerance (0 ~ +5W) guaranteed

High module conversion efficiency (up to 19.8%)

Slower power degradation enabled by Low LID Mono PERC technology: first year <2%, 0.55% year 2-25

Solid PID resistance ensured by solar cell process optimization and careful module BOM selection


Reduced resistive loss with lower operating current

Higher energy yield with lower operating temperature

Reduced hot spot risk with optimized electrical design and lower operating current

AOX-72MH/PRO 430~450W MBB

Design (mm)

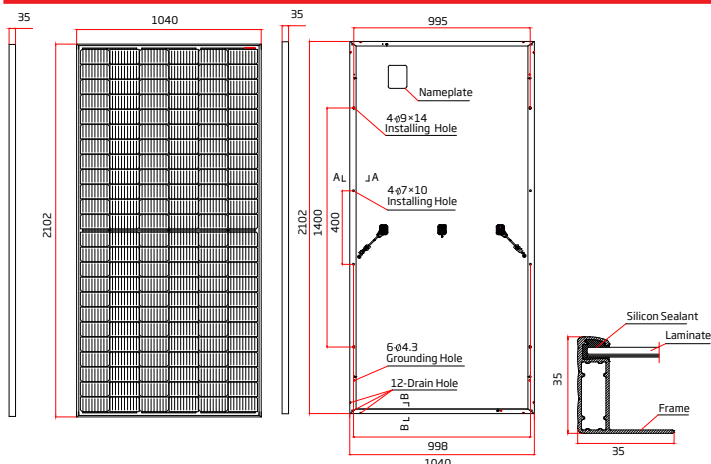

Mechanical Parameters

Cell Orientation: 6 × 24 = 144
 Junction Box: IP68, three diodes
 Output Cable: 4mm²
 length can be customized
 Glass: Single glass
 3.2mm coated tempered glass
 Frame: Anodized aluminum alloy frame
 Weight: 24KG
 Dimension: 2102*1040*35mm
 Packaging: 30pcs per pallet
 260pcs per 20'GP
 660pcs per 40'HC

Operating Parameters

Operational Temperature: -40 °C ~ +85 °C
 Power Output Tolerance: 0 ~ +5 W
 Voc and Isc Tolerance: ±3%
 Maximum System Voltage: DC1500V (IEC / UL)
 Maximum Series Fuse Rating: 20A
 Nominal Operating Cell Temperature: 45±2 °C
 Safety Class: Class II
 Fire Rating: UL type 1 or type 2

Electrical Characteristics

Test uncertainty for Pmax: ±3%

Model Number	AOX-72MH/PRO-430W AOX-72MH/PRO-435W AOX-72MH/PRO-440W AOX-72MH/PRO-445W AOX-72MH/PRO-450W									
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	430	318.5	435	322.2	440	326.0	445	329.3	450	333.0
Open Circuit Voltage (Voc/V)	49.2	45.9	49.4	46.1	49.6	46.3	49.8	46.3	50.0	46.7
Short Circuit Current (Isc/A)	11.19	9.02	11.26	9.08	11.33	9.13	11.20	9.20	11.27	9.27
Voltage at Maximum Power (Vmp/V)	40.6	37.5	40.8	37.7	41.0	37.9	41.2	38.1	41.4	38.3
Current at Maximum Power (Imp/A)	10.60	8.50	10.67	8.56	10.74	8.61	10.80	8.64	10.87	8.69
Module Efficiency(%)	19.7		19.9		20.1		20.4		20.6	
STC (Standard Testing Conditions): Irradiance 1000W/m ² , Cell Temperature 25 °C, Spectra at AM1.5										
NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m ² , Ambient Temperature 20 °C, Spectra at AM1.5, Wind at 1m/s										

Temperature Ratings (STC)


Temperature Coefficient of Isc: +0.057%/°C
 Temperature Coefficient of Voc: -0.286%/°C
 Temperature Coefficient of Pmax: -0.370%/°C

Mechanical Loading


Front Side Maximum Static Loading: 5400Pa
 Rear Side Maximum Static Loading: 2400Pa
 Hailstone Test: 25mm Hailstone at the speed of 23m/s

I-V Curve

Current-Voltage Curve(AOX-72MH/PRO-440W)

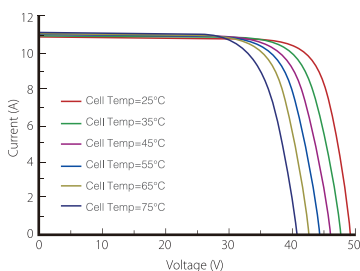

Power-Voltage Curve(AOX-72MH/PRO-440W)

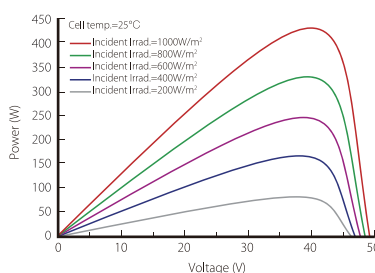

Current-Voltage Curve(AOX-72MH/PRO-440W)

