ZXM6-NHLD132 Series








Mono


350W | 355W | 360W | 365W | 370W | 375W

Made with selected materials and components to grant quality, duration, efficiency and through outputs, the ZXM6-NHLD132 double glass modules by ZNSHINE SOLAR feature have both decorative and shading functions. They represent the perfect choice for BIPV and BAPV construction applications. This allows you to produce clean energy while reducing your energy bill.

ZNSHINE SOLAR' S ZXM6-NHLD132 double glass solar modules are tested and approved by international acknowledged laboratories, so that we can offer our customers a reliable and price-quality optimized

12 years product warranty for general double glass modules 15 years product warranty only for Residential Rooftop PV system 30 years output warranty/0.5% Annual Degradation over 30 years

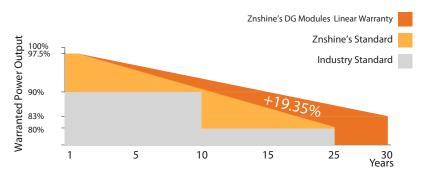

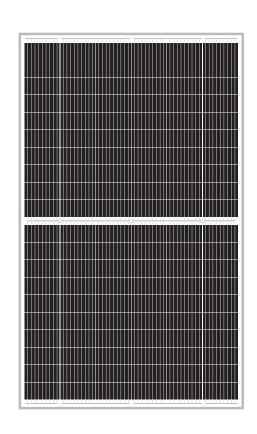

9BB

9 Busbar Solar Cell

No power loss thanks to improved temperature co-efficient caused by 9 busbar solar cell



Better Weak Illumination Response

Lower temperature coefficient and wide spectral response, higher power output, even under low-light settings



Easy to install

The module is very light in weight so the installation is easier and transport costs are lower

































ELECTRICAL PROPERTIES | STC*

Module Type	ZXM6-NHLD132 -350/M	ZXM6-NHLD132 -355/M	ZXM6-NHLD132 -360/M	ZXM6-NHLD132 -365/M	ZXM6-NHLD132 -370/M	ZXM6-NHLD132 -375/M
Nominal Power Watt Pmax(W)	350	355	360	365	370	375
Power Output Tolerance Pmax(%)	350±3%	355±3%	360±3%	365±3%	370±3%	375±3%
Maximum Power Voltage Vmp(V)	37.1	37.3	37.5	37.7	37.9	38.1
Maximum Power Current Imp(A)	9.44	9.52	9.60	9.69	9.77	9.85
Open Circuit Voltage Voc(V)	44.9±3%	45.1±3%	45.3±3%	45.5±3%	45.7±3%	45.9±3%
Short Circuit Current Isc(A)	9.90±3%	9.98±3%	10.06±3%	10.15±3%	10.23±3%	10.31±3%
Module Efficiency (%)	18.78	19.05	19.32	19.58	19.85	20.12

^{*}STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25°C, AM 1.5
*The data above is for reference only and the actual data is in accordance with the pratical testing

ELECTRICAL PROPETIES | NOCT*

Maximum Power Pmax(Wp)	261.3	264.9	268.5	272.4	276.1	279.7	
Maximum Power Voltage Vmpp(V)	34.7	34.9	35.1	35.3	35.5	35.7	
Maximum Power Current Impp(A)	7.53	7.59	7.66	7.72	7.79	7.85	
Open Circuit Voltage Voc(V)	41.9	42.1	42.2	42.4	42.6	42.8	
Short Circuit Current Isc(A)	8.00	8.06	8.12	8.20	8.26	8.33	

^{*}NOCT(Nominal Operating Cell Temperature):Irradiance 800W/m²,Ambient Temperature 20°C,AM 1.5,Wind Speed 1m/s *The data above is for reference only and the actual data is in accordance with the pratical testing

TEMPERATURE RATINGS

NOCT	44°C ±3°C
Temperature coefficient of Pmax	-0.36%/°C
Temperature coefficient of Voc	-0.29%/℃
Temperature coefficient of Isc	0.05%/℃

^{*}Do not connect Fuse in Combiner Box with two or more strings in parallel connection

WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C~+85°C
Maximum series fuse	20 A
Maximum load front/back	3600/1600
Maximum load front/back	with safety factor 1.5

DIMENSION OF THE PV MODULE (mm)

MECHANICAL DATA

Solar cells	Mono 158.75*79.375mm
Cells orientation	132 (6×22)
Module dimension	1860×1002×30 mm(With Frame)
Weight	24.5 kg
Glass	2.0mm+2.0mm heat strengthened glass
Junction box	IP 68, 3 diodes
Cables	H1Z2Z2-K 1×4,0mm²
Connectors	LJQ-3 Taizhou jinxiu Electrical Science & Technology Co., Ltd.
	manufactured in China

PACKAGING INFORMATION

Packing Type	40' HQ
Piece/Box	36
Piece/Container	840

I-V CURVES OF THE PV MODULE

