ZXM6-NHLD144 Series

Znshinesolar 9BB HALF-CELL Light-Weight Double Glass Mono PV Module


Mono Poly Solutions


420W | 425W | 430W | 435W | 440W | 445W

Made with selected materials and components to grant quality, duration, efficiency and through outputs, the ZXM6-NHLD144 double glass modules by ZNSHINE SOLAR feature have both decorative and shading functions. They represent the perfect choice for BIPV and BAPV construction applications. This allows you to produce clean energy whilst reducing your energy bill.

ZNSHINE SOLAR' S ZXM6-NHLD144 double glass solar modules are tested and approved by international acknowledged laboratories, so that we can offer our customers a reliable and price-quality optimized product.

12 years product warranty for general double glass modules 15 years product warranty only for Residential Rooftop PV system 30 years output warranty/0.5% Annual Degradation over 30 years

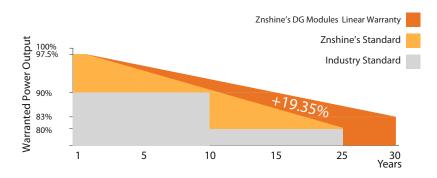

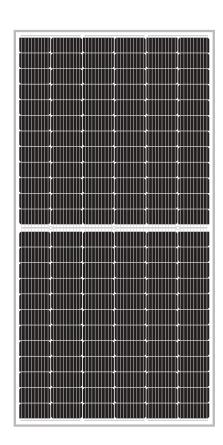

ZNSHINESOLAR

9BB

9 Busbar Solar Cell

No power loss thanks to improved temperature co-efficient caused by 9 busbar solar cell



Better Weak Illumination Response

Lower temperature coefficient and wide spectral response, higher power output, even under low-light settings



Easy to install

The module is very light in weight so the installation is easier and transport costs are lower



ZNShine PV-Tech Co., LTD, founded in 1988, is a world-leading high-performance PV module manufacturer, PV power station developer, EPC and power station operator. With its state-of-the-art production lines, the company boasts module output of 5GW. Bloomberg has listed ZNShine as a global Tier 1 PV manufacturer and Top 4 reliable PV supplier.

ZXM6-NHLD144 Series Znshinesolar 9BB HALF-CELL Light-Weight Double Glass Mono PV Module



ELECTRICAL PROPERTIES | STC*

Module Type	ZXM6-NHLD144 -420/M	ZXM6-NHLD144 -425/M	ZXM6-NHLD144 -430/M	ZXM6-NHLD144 -435/M	ZXM6-NHLD144 -440/M	ZXM6-NHLD144 -445/M
Nominal Power Watt Pmax(W)	420	425	430	435	440	445
Power Output Tolerance Pmax(%)	420±3%	425±3%	430±3%	435±3%	440±3%	445±3%
Maximum Power Voltage Vmp(V)	40.2	40.4	40.6	40.8	41.0	41.2
Maximum Power Current Imp(A)	10.45	10.52	10.60	10.67	10.74	10.81
Open Circuit Voltage Voc(V)	48.7±3%	48.9±3%	49.1±3%	49.3±3%	49.5±3%	49.7±3%
Short Circuit Current Isc(A)	10.94±3%	11.02±3%	11.10±3%	11.17±3%	11.25±3%	11.32±3%
Module Efficiency (%)	19.32	19.55	19.78	20.01	20.24	20.47

*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25°C, AM 1.5 *The data above is for reference only and the actual data is in accordance with the pratical testing

ELECTRICAL PROPETIES | NOCT*

Maximum Power Pmax(Wp)	313.5	317.1	321.0	324.7	328.4	332.1
Maximum Power Voltage Vmpp(V)	37.7	37.8	38.0	38.2	38.3	38.5
Maximum Power Current Impp(A)	8.33	8.39	8.45	8.50	8.56	8.62
Open Circuit Voltage Voc(V)	45.4	45.6	45.8	46.0	46.2	46.2
Short Circuit Current Isc(A)	8.84	8.90	8.96	9.02	9.09	9.14

*NOCT(Nominal Operating Cell Temperature):Irradiance 800W/m²,Ambient Temperature 20°C,AM 1.5,Wind Speed 1m/s *The data above is for reference only and the actual data is in accordance with the pratical testing

TEMPERATURE RATINGS


MECHANICAL DATA


NOCT	44℃ ±3℃	Solar c
Temperature coefficient of Pmax	-0.36%/°C	Cells or
Temperature coefficient of Voc	-0.29%/°C	Module
Temperature coefficient of lsc	0.05%/°C	Weight
*Do not connect Fuse in Combiner Box with two or m	nore strings in parallel connection	Glass

WORKING CONDITIONS

Maximum system voltage	1500 V DC	
Operating temperature	-40°C~+85°C	
Maximum series fuse	20 A	
Na	3600/1600	
Maximum load front/back	with safety factor 1.5	


DIMENSION OF THE PV MODULE (mm)





I-V CURVES OF THE PV MODULE

Piece/Container

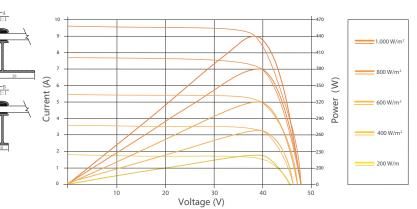

Solar cells	Mono 166×83mm		
Cells orientation	144 (6×24)		
Module dimension	2094×1038×30 mm(With Frame)		
Weight	28 kg		
Glass	2.0mm+2.0mm heat strengthened glass		
Junction box	IP 68, 3 diodes		
Cables	H1Z2Z2-K 1×4,0mm ²		
Connectors	LJQ-3 Taizhou jinxiu Electrical Science & Technology Co., Ltd.		
	manufactured in China		
PACKAGING INFORMATION			
Packing Type	40′ HQ		
Piece/Box	36		

792