




# AS-6P-HC

## POLYCRYSTALLINE MODULE

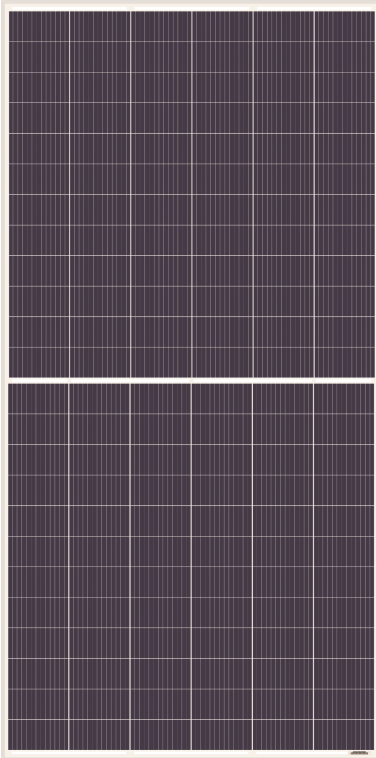

### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 18.24% by using innovative Half-cell design and Multi-busbar(MBB) cell technology.
- Low temperature coefficient and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- Potential induced degradation (PID) resistance.
- Positive power tolerance of 0 ~ +3 %.


### CERTIFICATIONS

- IEC 61215, IEC 61730, UL 1703, IEC 62716, IEC 61701, IEC TS 62804, CE, CQC, ETL(USA), JET(Japan), J-PEC(Japan), KS(South Korea), BIS(India), MCS(UK), CEC(Australia), FSEC(FL-USA), CSI Eligible(CA-USA), Israel Electric(Israel), InMetro(Brazil), TSE(Turkey)
- ISO9001:2008: Quality management system
- ISO14001:2004: Environmental management system
- OHSAS18001:2007: Occupational health and safety management system

### SPECIAL WARRANTY

- 12 years limited product warranty.
- Limited linear power warranty: 12 years 91.2% of the nominal power output, 30 years 80.6% of the nominal power output.

Passionately  
committed to  
delivering innovative  
energy solution

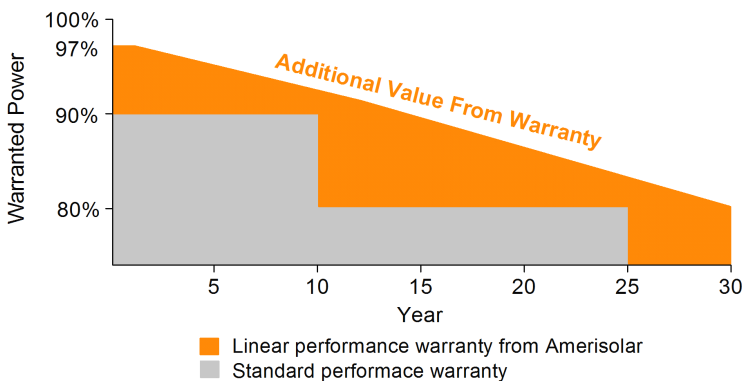

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power ( $P_{max}$ )	340W	345W	350W	355W	360W
Open Circuit Voltage ( $V_{OC}$ )	46.2V	46.4V	46.6V	46.8V	47.0V
Short Circuit Current ( $I_{SC}$ )	9.44A	9.52A	9.60A	9.68A	9.76A
Voltage at Maximum Power ( $V_{mp}$ )	38.2V	38.4V	38.6V	38.8V	39.0V
Current at Maximum Power ( $I_{mp}$ )	8.91A	8.99A	9.07A	9.15A	9.24A
Module Efficiency (%)	17.22	17.48	17.73	17.98	18.24
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1000V DC/1500V DC				
Fire Resistance Rating	Type 1(in accordance with UL1703)/Class C(IEC61730)				
Maximum Series Fuse Rating	20A				

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power ( $P_{max}$ )	252W	256W	259W	263W	267W
Open Circuit Voltage ( $V_{OC}$ )	42.5V	42.7V	42.9V	43.1V	43.3V
Short Circuit Current ( $I_{SC}$ )	7.65A	7.71A	7.78A	7.84A	7.91A
Voltage at Maximum Power ( $V_{mp}$ )	34.8V	35.0V	35.2V	35.4V	35.6V
Current at Maximum Power ( $I_{mp}$ )	7.25A	7.32A	7.36A	7.43A	7.50A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## MECHANICAL CHARACTERISTICS

Cell type	Polycrystalline
Number of cells	144 (6x24)
Module dimensions	1990x992x40mm (78.35x39.06x1.57inches)
Weight	21.5kg (47.4lbs)
Front cover	3.2mm (0.13inches) tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> (0.006inches <sup>2</sup> )
Connector	MC4 or MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	43°C±2°C
Temperature Coefficients of $P_{max}$	-0.37%/°C
Temperature Coefficients of $V_{OC}$	-0.30%/°C
Temperature Coefficients of $I_{SC}$	0.052%/°C


## PACKAGING

Standard packaging	26pcs/pallet
Module quantity per 20' container	260pcs
Module quantity per 40' container	572pcs(GP)/616pcs(HQ)


## ENGINEERING DRAWINGS

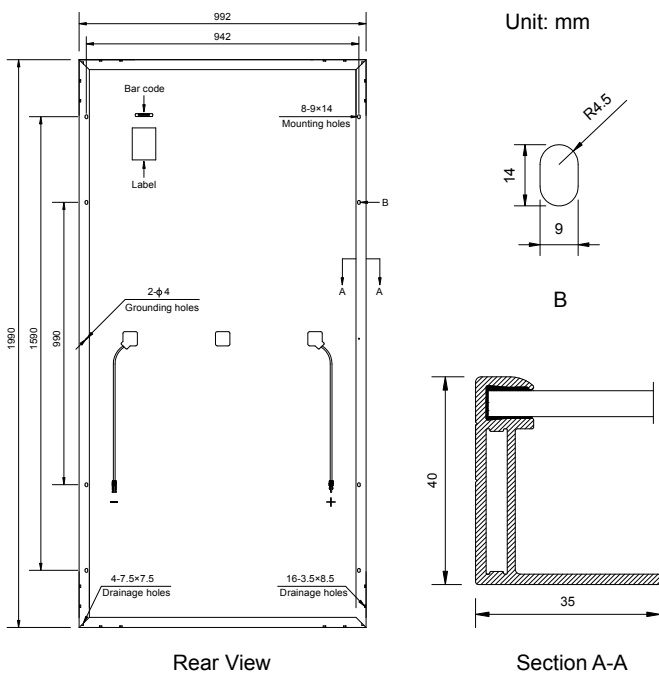

## IV CURVES

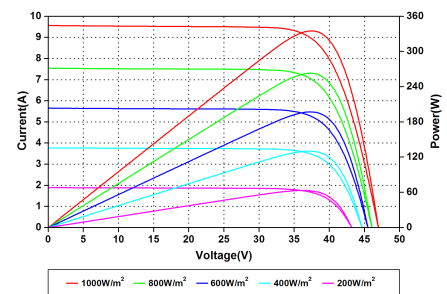

Current-Voltage and Power-Voltage Curves at Different Irradiances

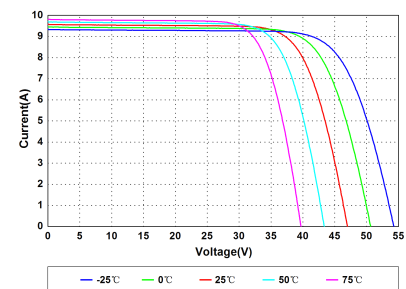

Current-Voltage Curves at Different Temperatures

Specifications in this datasheet are subject to change without prior notice.