



SOLESOLAR SP150W



0/+5 WP POSITIVE TOLERANCE



ROOFTOP AND OFF-GRID DESIGN




HIGH QUALITY

25 year linear performance warranty
10 year product warranty




The high voltage solar panels
designed for solar pumping



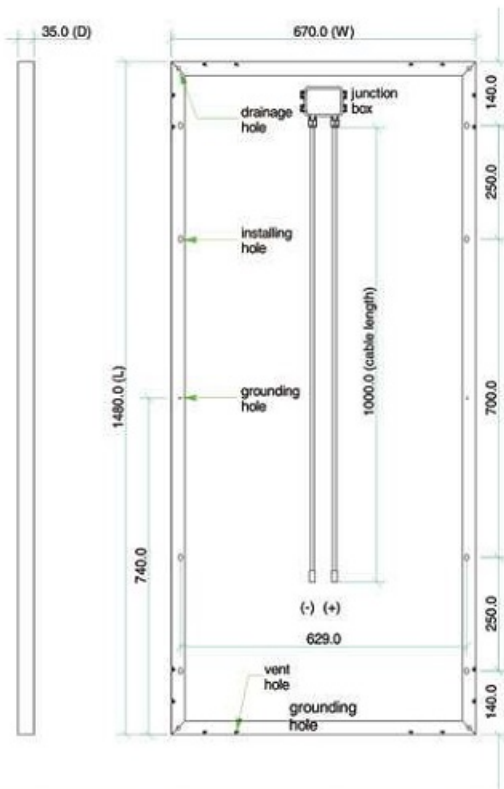

General characteristics

Cell	polycrystalline solar cell 156 x 156 mm
No. of Cells (Connections)	36 (4 x 9)
Panel Dimensions	1480 x 670 x 35 mm
Weight	11.6 kg
Connectors and Cables	Connectors and 1m cables

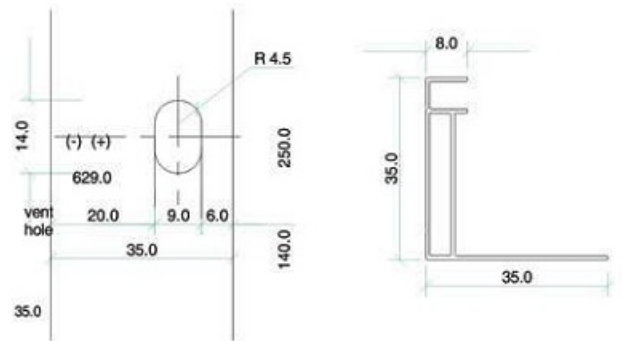

Thermal conditions

Normal Operating Cell Temperature 800W/m ² irradiance, 20°C, AM = 1.5	48°C ± 2°C
Power temperature coefficient	- 0.5%/K
Current temperature coefficient	0.035%/K
Voltage temperature coefficient	- 0.37 MV/K

Limits

Operating temperature	-40°C to + 85°C
Maximum system voltage	1000V DC

Electric performance at STC *

Maximum Power	120 W
Power tolerance	0/+5 Wp
Maximum power voltage	36 V
Maximum power current	3.33 A
Open circuit voltage	44.8 V
Short circuit current	3.92 A

Standard Test Conditions : 1000W/m² irradiance, 25°C and AM = 1.5

High performance

25 25 Years
linear performance

10 10 Years
product warranty

