

# EP-6250-HA-UD/20~35

## MV Power Station for 1500V Utility PV Plant



### More power generation

Inverter Max. efficiency 99%, Euro efficiency 98.7%  
Full power operation without derating at 50 °C  
1500Vdc PV system reduce power loss



### Low System Cost

Convenient for large block size PV plant  
Integrated MV transformer and switchgear  
High DC/AC ratio up to 1.5




### High Reliability

Capacitor life prediction technology  
Key components at front side, easy for maintenance  
Current sensor for each DC input, more reliable for monitoring and control




### Grid friendly

LVRT and HVRT function  
Active & reactive power dispatch

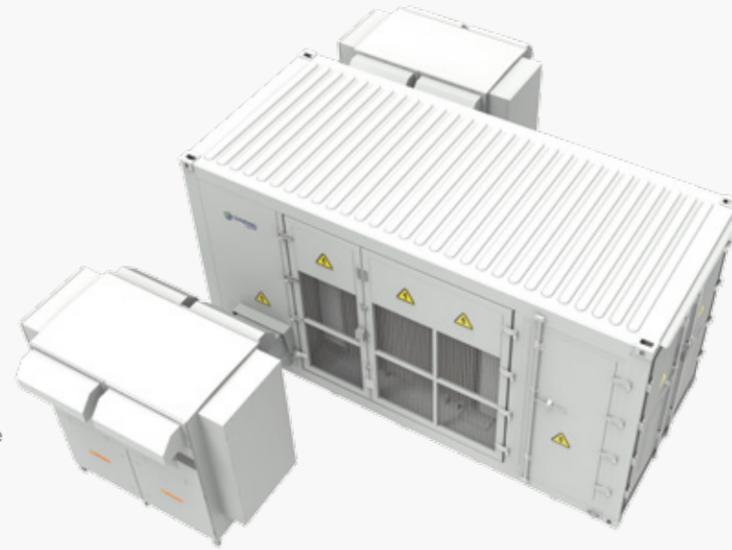

## Circuit

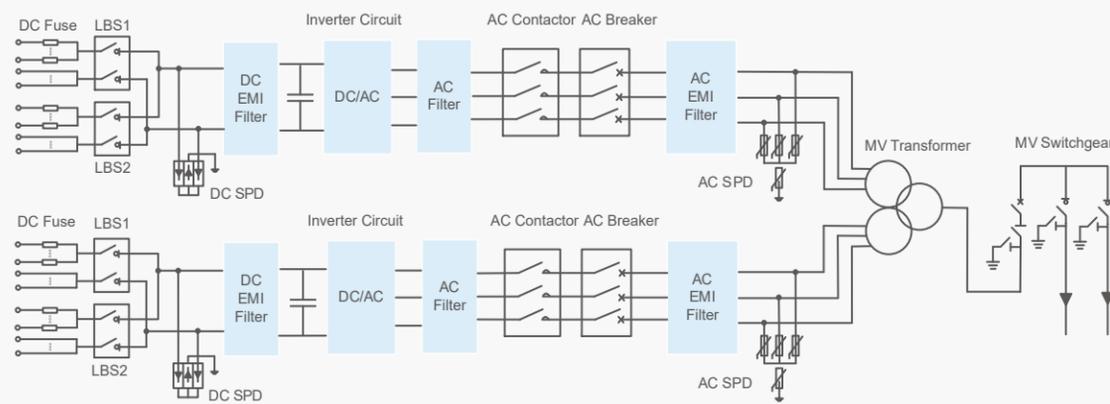

## Input ( DC )

EP-6250-HA-UD/20~35	
Max. PV input voltage	1500V
Max. input current	4075A*2
MPP voltage range for nominal power	900~1300V
Number of MPPT trackers	2
Number of DC inputs	(16~22)*2

## Output ( AC )

Rated AC output power(@50 °C)	3125kVA*2
Max. AC output power(@25 °C)	3594kVA*2
AC voltage range	20~35kV
Rated grid frequency/range	50 Hz/ 45~55 Hz, 60Hz/ 55~65 Hz
Output current harmonic(at nominal power)	< 3 %
DC current injection	< 0.5% In
Power factor at nominal power/range	>0.99/ 0.8 lagging to 0.8 leading

## Protection

DC input protection	Load break switch+fuse/Circuit breaker
AC output protection	Circuit breaker
AC MV output protection	Circuit breaker/Load break switch+fuse
Overvoltage protection	DC Type II / AC Type II
Leakage current monitoring	Yes
Grid monitoring/Ground fault monitoring	Yes/Yes
Insulation monitoring	Yes
Overheat protection	Yes
Night SVG function	Optional
Anti-PID function	Optional

## Efficiency

Inverter Max. efficiency	99.00%
Inverter EU efficiency	98.70%

## Transformer

Transformer Rated power	6250 kVA
Transformer Max. power	7188 kVA
LV / MV Voltage	0.63-0.63/20~35kV
Transformer Vector	Dy11y11
Transformer cooling type	ONAN (Oil Natural Air Natural)

## General data

Weight	25t
Protection level	Inverter:IP65, Others:IP54
Auxiliary power supply	Standard: 10kVA, Optional: max.40kVA
Temperature	- 30 ~ +60 °C (>50 °C derating)
Allowed humidity(non condensing)	0 - 95 %
Cooling mode	Temperature controlled forced air cooling
Max.operating altitude	2000m(standard) / > 2000m (optional)
Display	LCD
Communication port	RS485/Ethernet