


# TSUN Micro Inverter

TSOL-M800/M1600

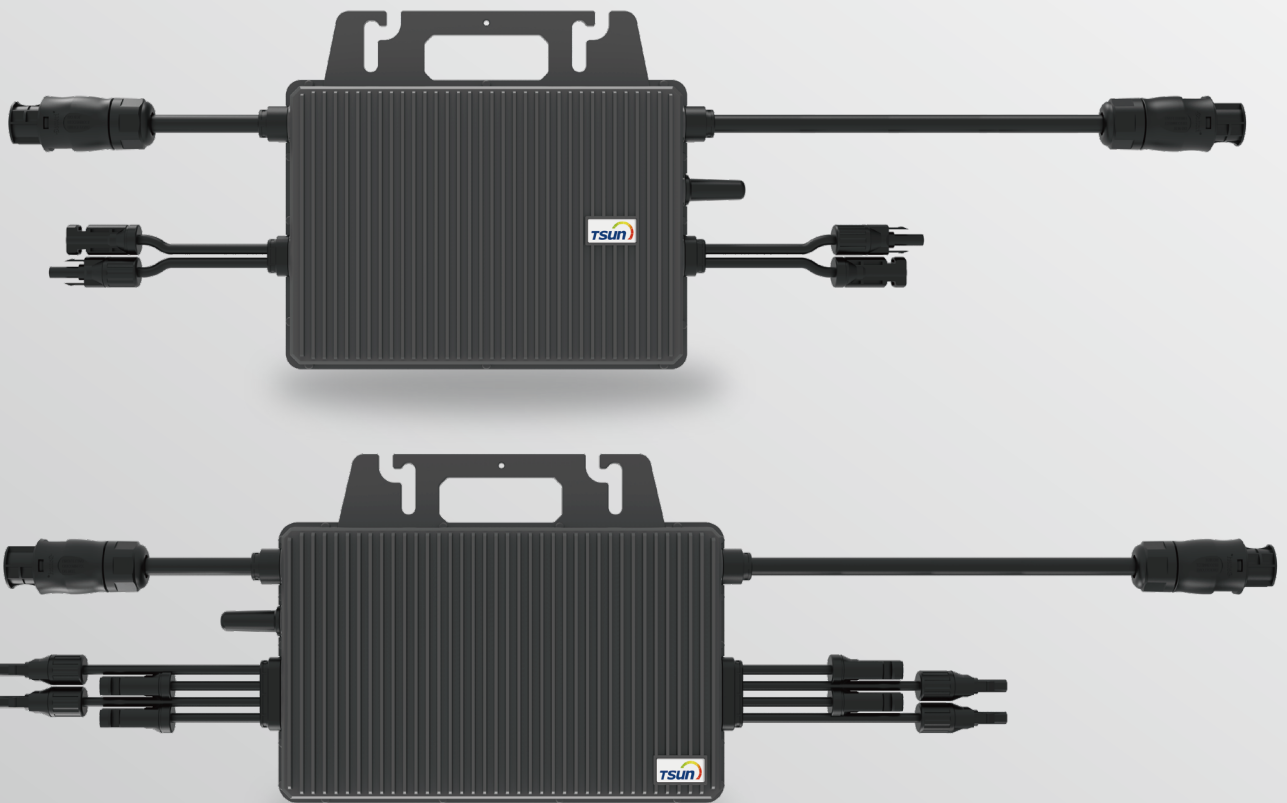

## Maximized Efficiency

- Individual optimization, separate dedicated MPPT for each panel.
- New topology design, max. efficiency up to 96.7%.

## Flexibility

- Plug & play installation. Easy to install.
- Multi-channel MPPT for complex installation environments with higher cost performance

## Safety

- Max. DC voltage 60V. No threat for high DC voltage.
- Integrated LoM protection function. Ensure the safety of power grid.

## Reliability

- Die casting design and glue filling technology. Better thermal dissipation.
- Standard 12 years warranty, Quality guaranteed.

UL1741/IEEE1547

FCC Part 15 Class B

FCC Part15 Class C

CSA-C22.2 No. 107.1-16

# Technical Data

Model	TSOL-M800	TSOL-M1600/M1600P*
<b>Input(DC)</b>		
Recommended Input Power [W]	2*280-440	4*300-470
MPPT Voltage Range [V]	33-48	36-48
Operating Voltage Range [V]		16-60
Max. Input Voltage [V]		60
Max. Input Current [A]		11.5
Max. Input Short Circuit Current[A]		15
<b>Output [AC]</b>		
Max. Continuous Output Power [W]	700	1500
Nominal Output Current [A]	3.36(@208V),2.91(@240V)	7.21(@208V),6.25(@240V)
Nominal Output Voltage [V] *		208 or 240
Nominal Frequency [Hz] *		60
Power Factor		>0.99
Output Current Harmonic Distortion		<3%
Max. Units Per 20A Branch	7(@208V),8(@240V)	3(@208V),4(@240V)
<b>Efficiency</b>		
Peak Inverter Efficiency		96.7%
CEC Weighted Efficiency		96.5%
Nominal MPPT Efficiency		99.9%
Night Time Power Consumption [mW]		<50
<b>Mechanical Data</b>		
Dimensions (WxHxD) [mm]	250×170×28	280x176x33
Weight [kg]	3	3.75
Type of Enclosure		IP67
Cooling		Natural Convection
<b>Environmental Data</b>		
Operating Ambient Temperature Range [°C]		-40°C to 65°C
Operating Internal Temperature Range [°C]		-40°C to 85°C
Relative Humidity		0-100 % condensing
Max. Operating Altitude Without Derating [M]		2000
Monitor		2.4G RF

\* TSOL-M1600P meets the requirements of California Rule21.

# Diagram

