




彩钢瓦屋顶可调节角度支架

产品说明/DESCRIPTION:

- 安装位置/Installation place:
彩钢瓦屋面/Caigang watts roof
- 斜面支架组件/Module slop:
根据实际需求/According to the practical demand
- 拉力/Drawling force:
1000N
- 风力承载能力/Wind load:
40m/s、32.5kg/m²、13级
- 雪载承受力/Snow load:
70kg/m²
- 支架类型/Module type
框架/Frame
- 材料/Material:
铝型材/Aluminium profile
- 颜色/Colour:
本色/Natural
- 使用年限/Warranty time:
25 years.

本系统由以下零部件组成/This system consists of the following components:

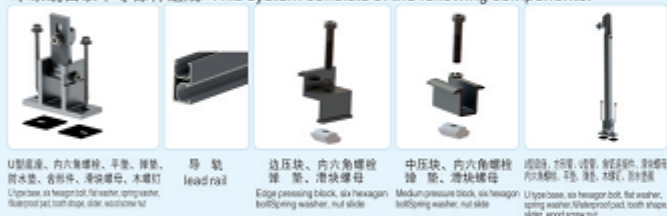

- 优势/ADVANTAGES:
1. 易于安装/Easy Installation.
 2. 可调节角度/Adjustable Angle.
 3. 通用兼容性/Universal Compatibility.

工程实例照片



1 第一步/First step

Self tapping screw with 2 hearts will be equipped with a tooth form a u-shaped base fixed on the caigang watts (with waterproof pad), the following figure:
用2颗自攻螺钉将配有齿形件的U型底座固定在彩钢瓦上(配防水垫), 如下图:

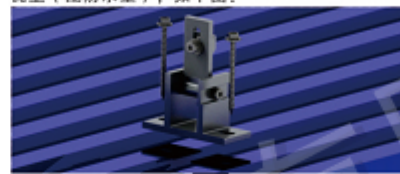


Figure 1(b)

2 第二步/Second step

The tooth part guide for M8*25 six hexagon bolt, flat washers, spring washers, slider nut, pay attention to the installation direction. The following diagram:
将导轨用M8*25的内六角螺栓、平垫、弹垫、滑块螺母固定在齿形件上, 注意安装的方向。如下图:



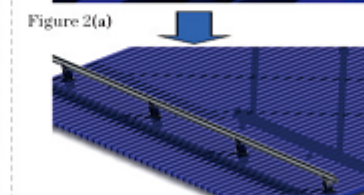


Figure 2(b)

5 第五步/Fifth step

Will form a side pressure, medium pressure block is fixed on the guide rail. The following diagram:
将组件用边压块、中压块固定在导轨上。如下图:

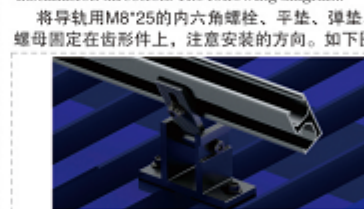

边压块固定



中压块固定

3 第三步/Third step

And regulate the assembly good u-shaped base rod part with two self-tapping screws on the caigang watts, the diagram below:
将装配好的U型底座及调节杆部份用2颗自攻螺钉固定在彩钢瓦上。如下图:

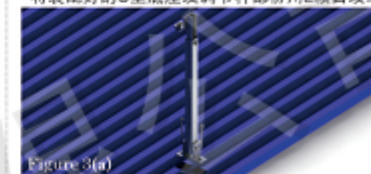


Figure 3(b)

注: 调节杆部份解析。
Note: the adjusting rod part analysis.



备注: 前后排U型底座在同一条直线上。
Note: front and rear U type base on the same line.

4 第四步/Fourth step

The tooth part guide for M8*25 six hexagon bolt, flat washers, spring washers, slider nut, pay attention to the installation direction. The following diagram:
将导轨用M8*25的内六角螺栓、平垫、弹垫、滑块螺母固定在齿形件上, 注意安装的方向。如下图:

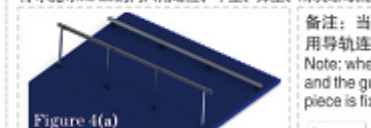


Figure 4(c)

备注: 当阵列比较长时, 导轨与导轨之间用导轨连接件固定, 如下图:
Note: when the array is rather long, guide rail and the guide rail between the connecting piece is fixed, as the following diagram:

