


Tile Roof Mounting System

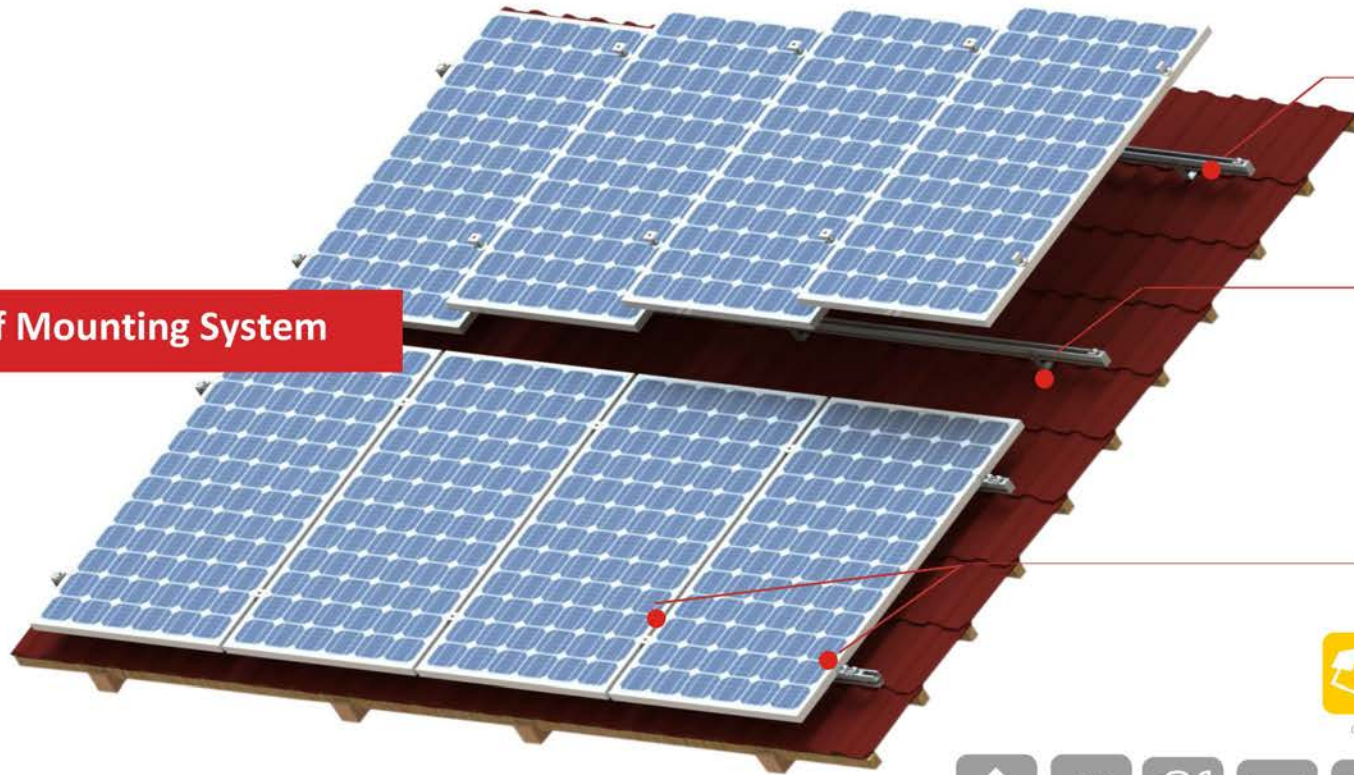

Technical Information

Installation Sit	Type Incline	Tile Roof Flush with the roof, up to 60°
Wind and Snow Load	Wind Speed Build Height Snow Load	Vos 60m/s h ≤ 30m Ps ≤ 1.4KN/m ²
Material	Material Anti-corrosive	Al6005-T5, SUS304 Anodized
Standard	AS/NZS 1170.2:2011 DIN 1055 JIS C 8955	
Warranty	Warranty Duration	10 years warranty more than 20 years


10
years
Warranty

Installation

Step1. Fix the hook on the wood rafters with wood screw.



Step2. Put the aluminum rails on the top of roof hook, fixing it with nut and bolt.

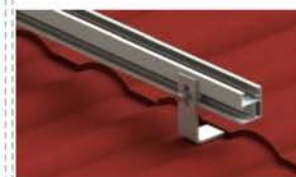

Step3. Fix the module on the rail by mid clamp and end clamp.

