


Adjustable Tilt Mounting System



Flat roof

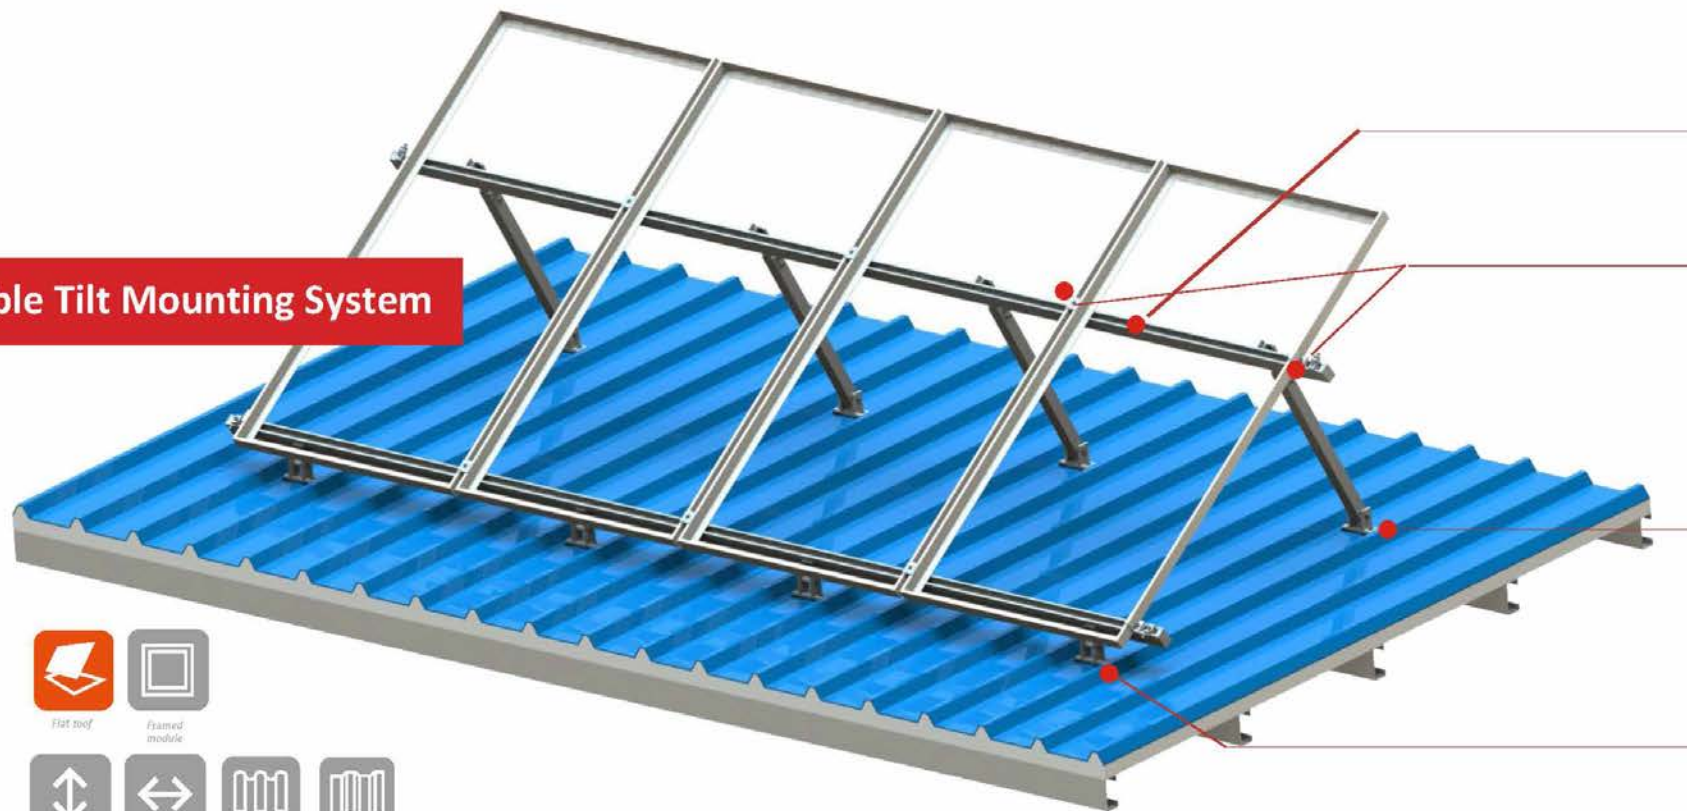

Framed module



Orientation portrait



Orientation landscape



Corrugated metal



Trapezoidal sheet

Technical Information

Installation Sit	Type Incline	Tin Roof 10- 60°
Wind and Snow Load	Wind Speed Build Height Snow Load	$V \leq 60\text{m/s}$ $h \leq 30\text{m}$ $P \leq 1.4\text{KN/m}^2$
Material	Material Anti-corrosive	Al6005-T5, SUS304 Anodized
Standard	AS/NZS 1170.2:2011 DIN 1055 JIS C 8955	
Warranty	Warranty Duration	10 years warranty more than 20 years

10
years
Warranty

Installation

Step1. Fasten the adjustable stand to the roof by wood screw, install the tilt kits on base



Step2. Insert the nut of tilt leg into the rail channel, and fasten the bolt and nut to fix the rail



Step3. Fix the module on the rail by mid clamp and end clamp



※ fix the base with the roof using the tapping screw