


Adjustable Tilt Mounting System (Stand Seam Roof)



Flat roof

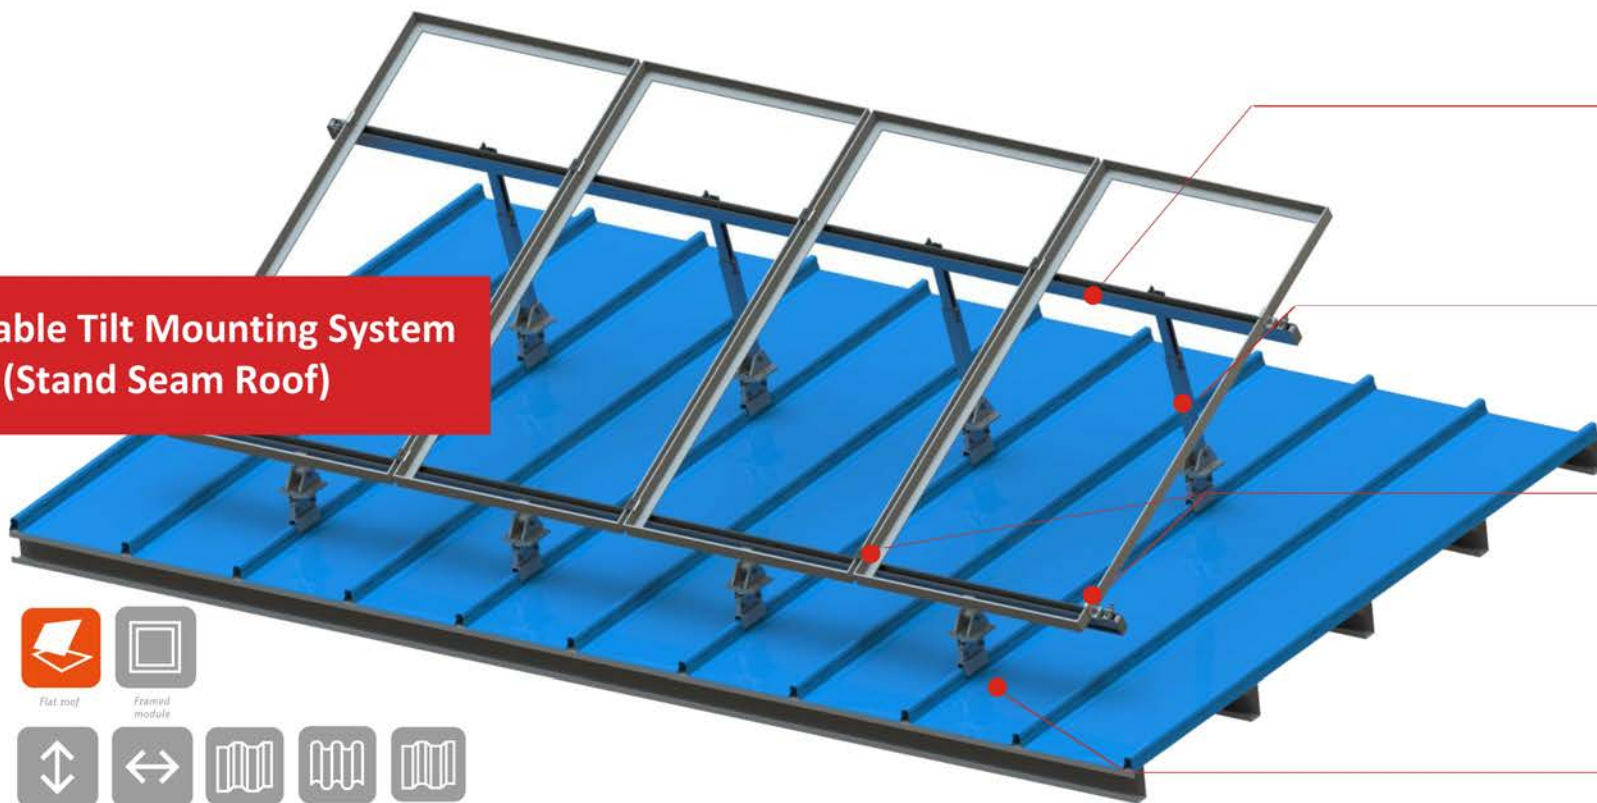

Framed module



Orientation portrait



Orientation landscape



Stand Seam Roof



Corrugated metal



Trapezoidal sheet


Technical Information

Installation Sit	Type	Tin Roof Incline
Wind and Snow Load	Wind Speed Build Height Snow Load	V ₀ ≤ 60m/s h ≤ 30m P ≤ 1.4KN/ m ²
Material	Material Anti-corrosive	Al6005-T5, SUS304 Anodized
Standard	AS/NZS 1170.2:2011 DIN 1055 JIS C 8955	
Warranty	Warranty Duration	10 years warranty more than 20 years

10
years
Warranty

Installation

Step1. Fix the standing seam clamps on the roof, fasten the adjustable stand on them, install the tilt kits on base

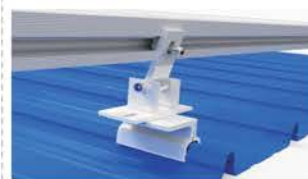

Step2. Insert the nut of tilt leg into the rail channel, fasten the adjustable stand on them, and fasten the bolt and nut to fix the rail.



Step3. Fix the module on the rail by mid clamp and end clamp.

