




Standing seam roof mounting system - Claw

Headache-free mounting solution for metal roofs with standing seam design


12 years warranty

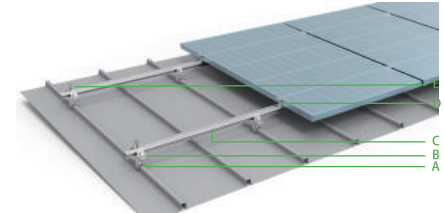

Features

The standing seam roof clamps make mounting on folded seam roof particularly easy. The clamps are simply attached to the standing seams. It offers a secure fastening without penetrating the roof sheets, ensuring maximum stability with minimum weight. The variety of system combinations like L-foot, fixed foot or PV module clamp directly, allows it to be connected quickly to all rail components.

Application	Suitable for Lysaght® Kliplok® 406, 700, Lysaght® Locked seam®, Stramit® Speed Deck, Fielder®
Roof slope	Up to 45°
Min. sheet thickness	0.42mm minimum
Building height	Up to 20m
Wind speed	Up to 88m/s (316.8kmh/196.9mph)
PV module	Framed, unframed
Module orientation	Landscape, portrait
Material	Anodized aluminum 6005 T5 stainless steel 304
Standard	AS/NZ1170.2:2011, BS C 8955:2011



Claw

Components

