



FTP-6 Aluminum Flat Roof Mounting

TP-6 Aluminum Flat Roof Mounting can protect the roof without drilling holes. The entire system is high pre-assemble for fast installation and flat packed for convenient storage and transport.

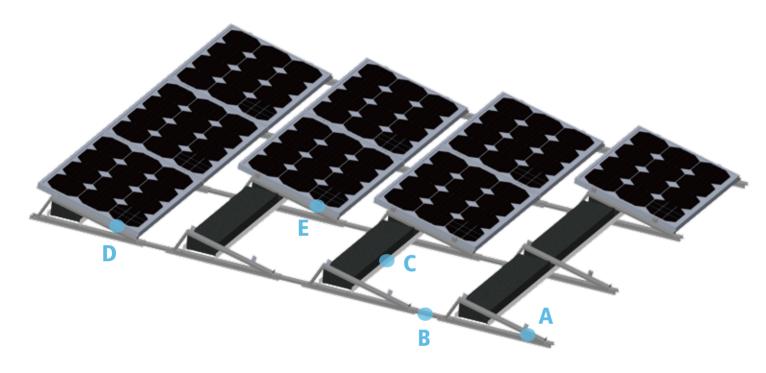

COMPONENTS PARTS

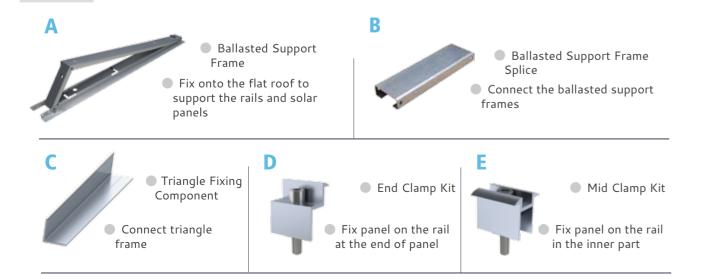

Brief Introduction

- Install Site: Flat roof
- Module Angle: 5-25°
- Snow Load: 1,4KN/m2
- Material: AL 6005-T5 & Stainless Steel 304
- Max. Wind Speed: 30m/s
- Max. Roof Clearance: up to 65ft(22cm), customized available

Color: Natural

• Warranty: 12 years warranty; 25 years service life

Project Solution

BOM List for a project with 3000W:

ITEMS	DESC.	QTY.
Solar Panel	1640*992*40mm	12pcs.
Support frame		12pcs.
Frame Splice		8pcs.
Fixing Component	L=1935mm	18pcs.
MidClamp	L=40mm	18pcs.
End Clamp	L=40mm	12pcs.
Grounding Washer	L=40mm	18pcs.
Grounding Lug	L=16mm	брсѕ.

Brief Installation Guide

