
1. The installation of spare parts, plant height, installation without any cutting or drilling, greatly reduces the installation time.

- 2. The panels installation flexibility, the horizontally landscape can easily implement.
- 3. Strict quality control to ensure the service life of the stents.


The ground, cement foundation
5-60°
40km/s
16KN/m <sup>2</sup>
Frame or no frame
The vertical or horizontal
AS/NZS1170
DIN 1055
JIS C 8956:2011
International Building Code IBC 2009
California Building Cod e CBC 2010
Q235B(hot dip galvanized)
Carbon steel (dacromet)
Aluminum alloy
Natural white or color according to customer's requirements
10 years





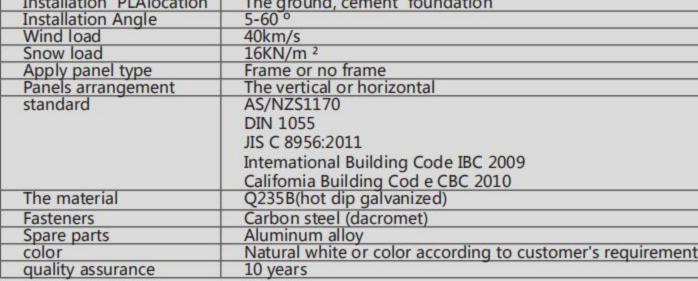



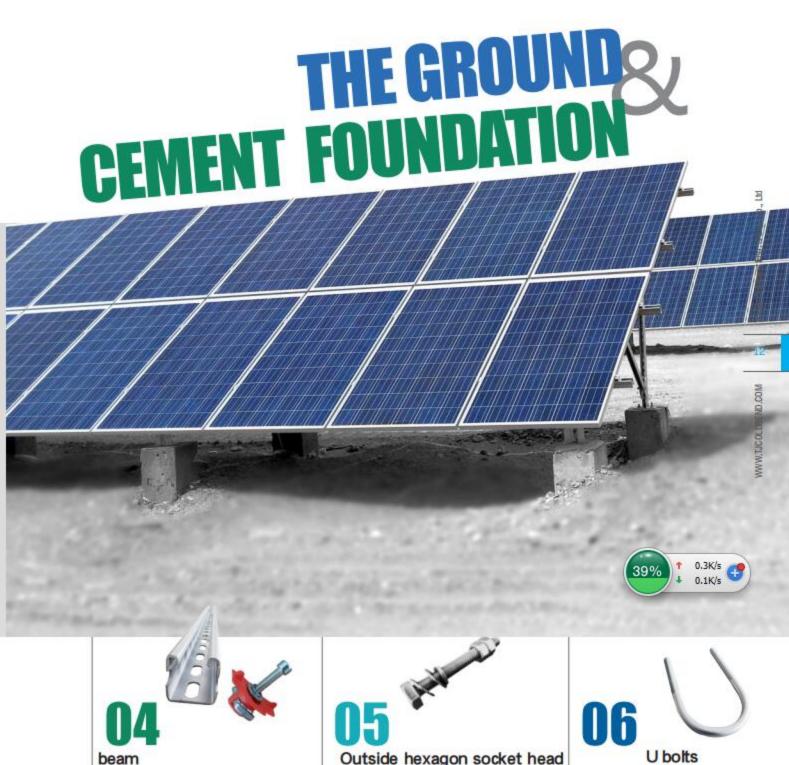

bolt &nut external member

Inside hexagon socket head