


# GFMJ-3000

## GEL Battery (2V3000Ah)

### Features

- Gel battery uses corrosion resistant high-tin alloy grids to enhance corrosion resistance of plates, effectively improve the life of float charging.
- High-tight assembly process design and assorted equipments greatly improved batteries charging acceptance and deep discharging recovery performance.
- Precise acid vacuum injection method, advanced, environmental formation technology, which effectively guarantee the consistency of the batteries
- The terminal adopts proprietary technology of sealing structure and high-temperature curing epoxy adhesive to ensure batteries safety and reliability

### Dimensions

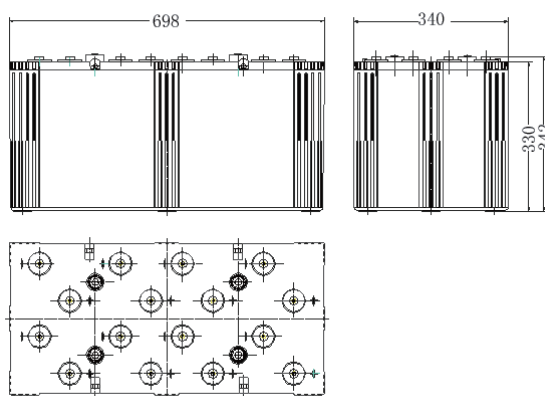

### Specifications

Battery Type	GEL Battery
Nominal Voltage	2V
Nominal Capacity	3000Ah (10hr, 1.8V, 25°C)
Dimension(L*W*H)	696(mm)*340(mm)*342(mm)
Designed Life(Float charge, 25°C)	10 Years
The reference weight	186.87kg
Operation Ambient Temperature	-25°C~50°C
Optimal Ambient Temperature	20°C~25°C
Self-discharge Residual Capacity	After 90days storage at 25°C, the residual capacity≥90%
Container Material	ABS
Terminal(mm)	Φ20, M8
The Reference Dimension for Installation(See Pic, L*W*H)	12V: 1185×800×1045mm




Follow us




www.renola.com

# TECHNICAL GRAPHS


## DISCHARGE CHARACTERISTIC CURVE

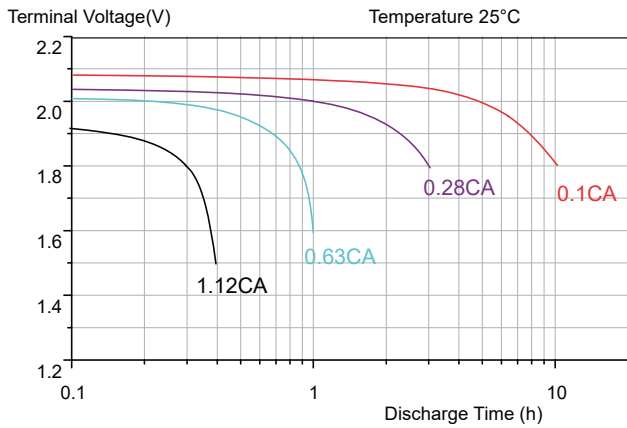

Temperature Vs. Capacity

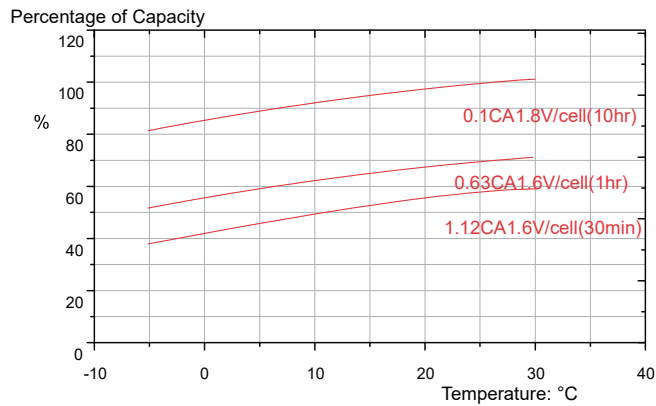


## Self-discharge Characteristics

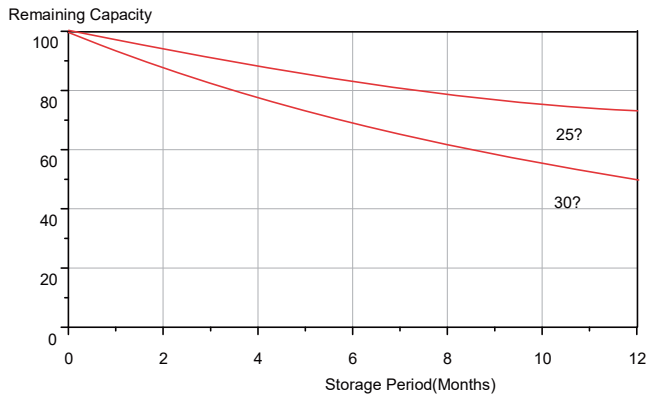


## Discharge Current and Discharge Final Voltage

Discharge Current	0.1C	0.16C	0.23C	0.6C	3C
Final Voltage (V)	1.80	1.75	1.70	1.60	1.30


## CHARGE CHARACTERISTIC CURVE

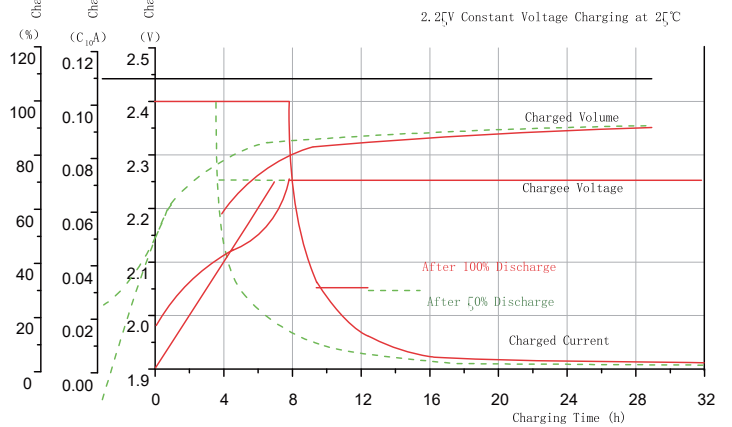

## Accelerated Life Characteristic

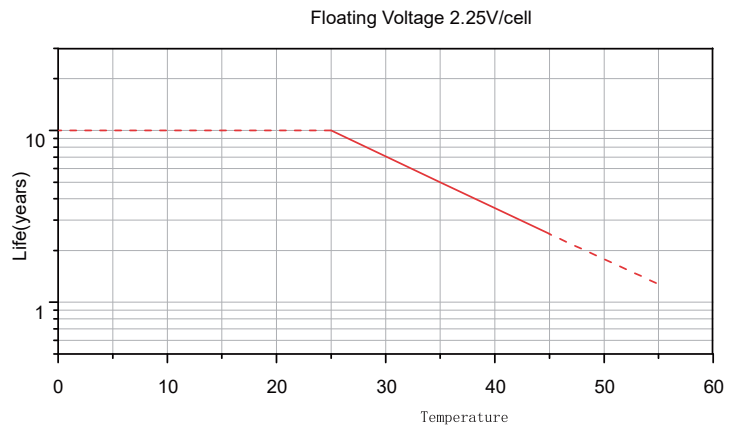

## Installation Diagram

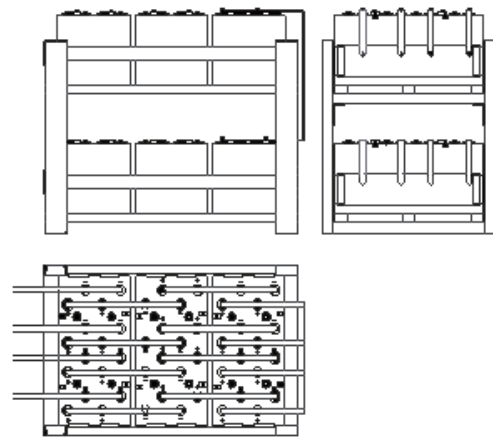

## Charge Method

Type	Voltage (V)	Temperature compensation coefficient	Charge Current (A)
Cycle Charge	2.30~2.40	-4mV/°C	0.1C~0.25C
Float Charge	2.23~2.27	-3mV/°C	

Follow us

