


# 01.

## GP Series General AGM Battery



### Applied Scope

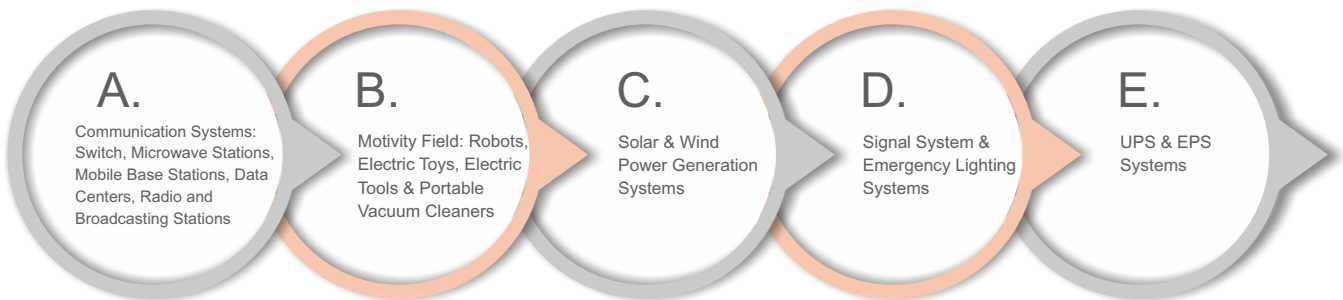

### Product Characteristic

- Using tight assembly technology with excellent high efficiency discharge performance.
- With special design, the battery will not reduce the amount of electricity fluid during use, even no necessary to add any water during using life time
- Uses a unique corrosion-resistant grid alloy, long service life.
- All with high purity raw materials, battery self-discharge is minimal.
- Using gas compounds technology, the battery has a high sealing reaction efficiency, no mist precipitation, safety and environmental protection, pollution-free.
- With special design and high reliable sealing technology to ensure the battery sealing, safe, and reliable.

# Technical Specification

Model	Nominal Voltage (V)	Capacity (Ah)	Dimension (mm/Kg[(±5%)])					Terminal	Layout
			Length	Width	Height	Total Height	Weight		
GP7-12	12	7/20HR	151	65	95	101	2.15	F2	D
GP7.5-12	12	7.5/20HR	151	65	95	101	2.25	F2	D
GP8.5-12	12	8.5/20HR	151	65	95	101	2.35	F2	D
GP10-12	12	10/20HR	151	99	95	101	3.2	F2	D
GP12-12	12	12/20HR	151	99	95	101	3.4	F2	D
GP17-12	12	17/20HR	181	77	167	167	5.5	L1	B
GP20-12	12	20/20HR	181	77	167	167	5.8	L1	B
GP24-12AQ	12	24/10HR	166	126	174	178	8.1	L6	B
GP24-12AT	12	24/10HR	166	126	174	174	8.1	T2	B
GP26-12AT	12	26/10HR	165	176	125	125	8.2	T2	B
GP33-12AQ	12	33/10HR	196	131	155	180	10.5	L7	A
GP33-12AT	12	33/10HR	196	131	155	167	10.5	T2	A
GP38-12AQ	12	38/10HR	198	166	174	179	12.5	L6	B
GP38-12AT	12	38/10HR	198	166	174	174	12.5	T2	B
GP42-12AQ	12	42/10HR	198	166	174	174	13	L7	B
GP42-12AT	12	42/10HR	198	166	174	174	13	T2	B
GP50-12AQ	12	50/10HR	258	134	200	200	16.5	L8	A
GP50-12BT	12	50/10HR	229	138	208	212	16.3	T3	A
GP55-12AP	12	55/10HR	229	138	208	219	18.2	L4	A
GP55-12AT	12	55/10HR	229	138	208	212	18.2	T3	A
GP65-12AQ	12	65/10HR	351	167	176	176	20.5	L9	B
GP65-12AT	12	65/10HR	351	167	176	176	20.5	T3	B
GP70-12AQ	12	70/10HR	351	167	176	176	22.5	L9	B
GP70-12AT	12	70/10HR	351	167	176	176	22.5	T3	B
GP80-12AQ	12	80/10HR	331	174	214	240	26.8	L12	B
GP80-12AT	12	80/10HR	331	174	214	219	26.8	T4	B
GP90-12AQ	12	90/10HR	307	169	211	227	27.3	L13	A
GP90-12AT	12	90/10HR	307	169	211	215	27.3	T3	A
GP100-12AQ	12	100/10HR	331	174	214	240	30	L12	B
GP100-12AT	12	100/10HR	331	174	214	219	30	T4	B
GP120-12AQ	12	120/20HR	331	174	214	240	32.0	L12	B
GP120-12AT	12	120/20HR	331	174	214	219	32.0	T4	B
GP150-12AQ	12	150/20HR	484	171	241	241	44.0	L16	A
GP150-12AT	12	150/20HR	484	171	241	241	44.0	T4	A
GP160-12AQ	12	160/10HR	532	206	216	240	49.0	L17	C
GP160-12AT	12	160/10HR	532	206	216	221	49.0	T4	C
GP180-12AQ	12	180/10HR	532	206	216	240	52.0	L17	C
GP180-12AT	12	180/10HR	532	206	216	221	52.0	T4	C
GP200-12AQ	12	200/10HR	522	242	219	244	60.0	L17	C
GP200-12AT	12	200/10HR	522	240	219	224	60.0	T5	C
GP220-12AQ	12	220/10HR	522	242	219	244	62.5	L17	C
GP220-12AT	12	220/10HR	522	240	219	224	62.5	T5	C
GP250-12AQ	12	250/10HR	521	269	220	245	70.0	L17	C
GP250-12AT	12	250/10HR	521	269	220	224	70.0	T5	C

● Remarks: Products specifications are subject to change without notice.