


Product Image



Product Dimensions

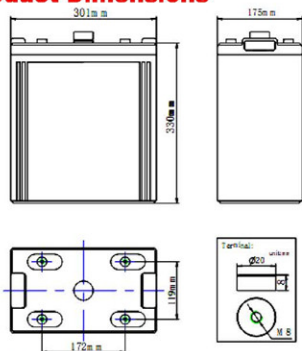

Characteristics

Nominal Voltage		2V
Nominal Capacity (10 hour rate)		600Ah
Capacity 25°C (77°F)	20 hour rate (31.8A)	636Ah
	5 hour rate (106.1A)	530.5Ah
	1 hour rate (330A)	330Ah
	Internal Resistance	Full Charged Battery 25°C $\leq 0.2m\Omega$
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 90A Voltage 2.23-2.27V
	Cycle	Initial Charging Current Less than 90A Voltage 2.33-2.37V

Packaging

Battery Dimensions	Length	301mm
	Width	175mm
	Height	330mm
	Total Height	366mm
Box Dimensions	Length	316mm
	Width	189mm
	Height	425mm
Quantity Per Box		1 PC per box
Net weight Per Cell		38.0 kg±500g
Net weight Per Box		38.0kg
Gross Weight		39.0kg

Discharge Constant Current (Amperes at 77°F 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	1676	1082	898	594	442	363	231	165	112	74	66.0	35.0
1.65V	1646	1063	881	583	434	356	227	162	110	73	64.8	34.3
1.70V	1615	1043	865	572	426	350	223	159	108	71	63.6	33.7
1.75V	1585	1023	849	562	418	343	218	156	106	70	62.4	33.1
1.80V	1524	984	816	540	402	330	210	150	102	67	60.0	31.8

Discharge Constant Power (Watts at 77°F 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	3227	2084	1728	1143	851	699	445	318	216	142	127.1	67.3
1.65V	3168	2046	1696	1123	836	686	437	312	212	140	124.7	66.1
1.70V	3110	2008	1665	1102	820	673	429	306	208	137	122.4	64.9
1.75V	3051	1970	1634	1081	805	661	420	300	204	135	120.1	63.7
1.80V	2934	1894	1571	1040	774	635	404	289	196	129	115.5	61.2

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **GT** for the latest information.