




JPG12-44 12V44Ah

HUBEI JOPOWER POWER CO.,LTD

The battery is constructed by plates, separators, safety valves and container.
 Since the electrolyte is held by a glassmat separator and plates, the battery can use in any direction and position without leakage.

Outer Dimensions

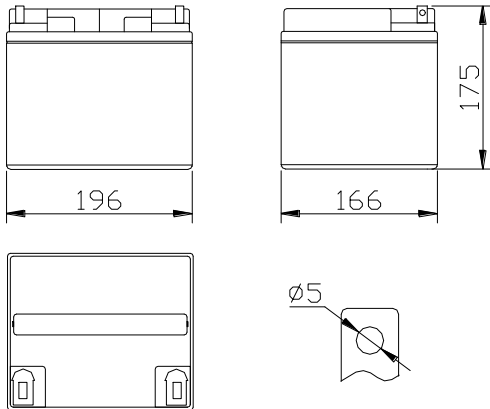

Dimensions and Weight

Length (mm / inch).....	196 / 7.72
Width (mm / inch)	166 / 6.54
Height (mm / inch)	175 / 6.89
Total Height (mm / inch).....	175 / 6.89
Approx.Weight(Kg / lbs).....	14.3 / 31.46

Performance Characteristics

Nominal Voltage	12V
Number of cell	6
Design Life	5 years
Nominal Capacity 77°F(25°C)	
20 hour rate(2.25A,10.5V)	44Ah
10 hour rate(4.08A,10.5V)	40.8Ah
5 hour rate (7.56A,10.5V)	37.8Ah
1 hour rate(28.5A,9.6V)	28.5Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	8mΩ
Self-Discharge	
3% of capacity declined per month at 20°C(average)	
Operation Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max.Discharge Current 77°F(25°C)	540A(5s)
Short Circuit Current	675A







Battery Construction

COMPONENT	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
RAW MATERIAL	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	PVC-SiO ₂	GEL

Charging Methods

Application	Charging method	Charging Voltage at 25°C	Temperature compensation coefficient of charging voltage	Max.charging current	Charging time 25°C(h)		Temp (°C)
					100% discharge	50% discharge	
For standby power source	Constant voltage & Constant Current Charging (with current restriction)	13.4-13.8V	-18 mV/°C	13.5A	24	20	0~40 (32~104°F)
For cycle service		14.5-15.0V	-30 mV/°C	13.5A	16	10	

*Temperature compensation of charging voltage is not needed when using the batteries within 15°C to 35°C range.

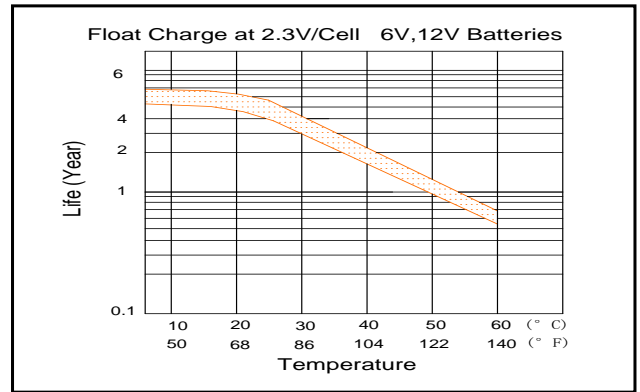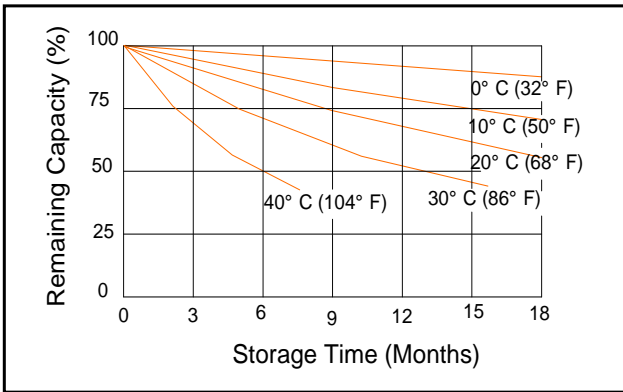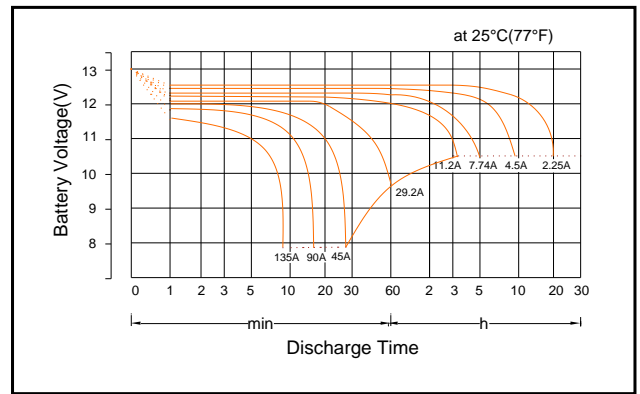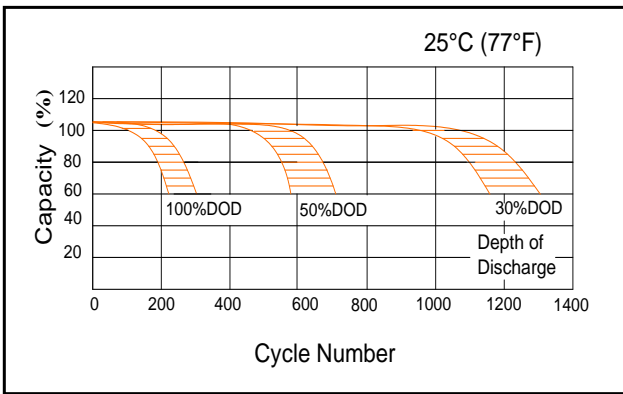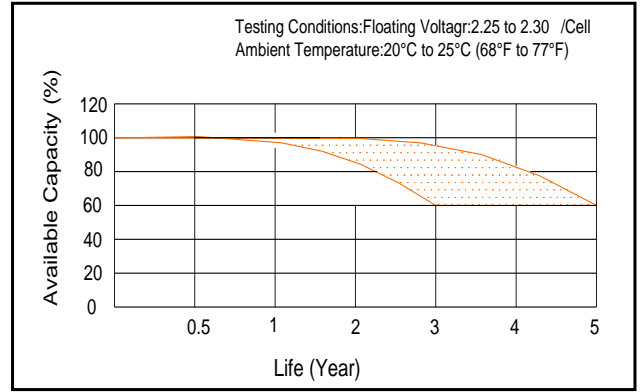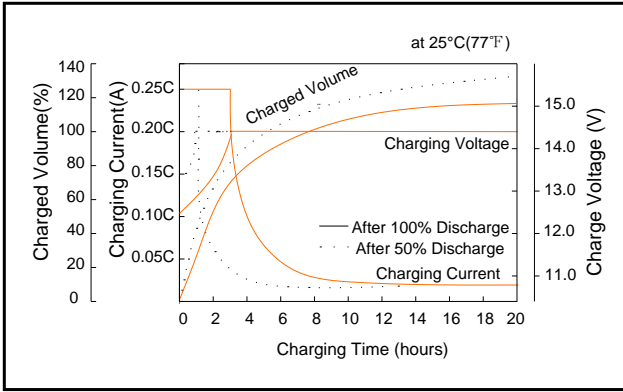

Discharge Constant Current (Amperes at 77°F/25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	154	123	88.0	50.6	36.1	28.6	15.4	11.1	7.56	4.97	4.13	2.24
1.65V	149	119	83.6	49.6	35.6	28.3	15.2	11.0	7.52	4.97	4.13	2.24
1.70V	140	110	79.2	48.4	35.2	28.1	15.1	11.0	7.48	4.92	4.09	2.20
1.75V	123	92.4	74.8	45.7	34.7	27.6	14.9	10.8	7.48	4.80	4.09	2.20
1.80V	110	79.2	70.4	39.6	34.3	27.2	14.4	10.5	7.39	4.80	4.00	2.15

Discharge Constant Power (Watts/cell at 77°F/25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	280	224	162	97.7	68.6	55.0	29.5	21.4	14.5	9.63	8.05	4.40
1.65V	268	216	153	94.6	67.7	54.0	29.4	21.3	14.4	9.59	8.00	4.40
1.70V	256	202	145	90.2	66.8	54.0	29.1	21.3	14.4	9.59	8.00	4.35
1.75V	224	171	137	84.8	66.0	53.3	28.7	20.9	14.4	9.46	7.92	4.27
1.80V	200	154	130	73.5	65.1	52.3	27.8	20.3	14.3	9.46	7.79	4.18

HUBEI JOPOWER POWER CO.,LTD

East Hancai road, Hanchuan Economic Development Area,
Hanchuan City, Hubei Province, China
TEL: (+86-712) 837 2688 FAX: (+86-712) 879 0888 Jeffery@Jopower.com