

# UCG125-12

12V 125AH

Deep Cycle

# Ultracell®

Quality in Every Language

## UCG125-12



## Physical Specification





Part Number	UCG125-12
Length	345 ± 2 mm
Width	172 ± 2 mm
Container Height	274 ± 2 mm
Total Height (with terminal)	280 ± 2 mm
Approx Weight	38 kg

## Specifications

	Nominal Voltage	12V
	Nominal Capacity (20HR)	130AH
Terminal Type	Standard Terminal	F11
	Optional Terminal	-
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	ABS(UL94:VO)
Rated Capacity	20hr, 1.80V/cell, 25°C	130.0 AH/6.5A
	10hr, 1.80V/cell, 25°C	125.0 AH/12.1A
	5hr, 1.75V/cell, 25°C	104.0 AH/20.8A
	1hr, 1.60V/cell, 25°C	90.6 AH/30.2A
Max Discharge Current	1170A (5s)	
Internal Resistance	4.5mΩ	
Discharge Characteristics	Operating Temp. Range	Discharge: -20 ~ 55°C
		Charge: 0 ~ 40°C
		Storage: -20 ~ 50°C
	Nominal Operating Temp. Range	25 ± 3°C
	Cycle Use	Initial Charging Current less than 32.5A. Voltage 14.4V ~ 15.0V Temp. Coefficient -30mV/°C
	Standby Use	No limit on Initial Charging Current Voltage 13.5V ~ 13.8V Temp. Coefficient -20mV/°C
Capacity affect by Temperature	40°C	103%
	25°C	100%
	0°C	86%
Design Floating Life at 20°C	12 Years	
Self Discharge	Ultracell batteries may be stored for up to 6 months at 25°C(77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.	

## Dimensions

### F11 Terminal




### Constant Current Discharge (Amperes) at 20°C

F.V/Time	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	110.0	86.3	65.9	55.1	35.0	26.7	22.1	19.1	16.4	14.6	13.1	12.0	11.3	6.24
1.80V/cell	126.0	96.5	72.6	60.8	37.8	28.6	23.4	20.0	17.3	15.2	13.8	12.6	11.9	6.50
1.75V/cell	141.6	106.1	78.5	65.1	40.1	30.2	24.5	20.8	17.9	15.8	14.2	13.0	12.1	6.63
1.70V/cell	152.5	113.6	83.4	68.9	42.5	31.4	25.3	21.5	18.5	16.3	14.6	13.3	12.4	6.71
1.67V/cell	158.7	118.0	86.3	71.5	43.6	32.4	25.9	21.9	18.8	16.5	14.9	13.5	12.5	6.78
1.60V/cell	172.0	126.4	92.7	75.9	45.4	33.7	26.9	22.6	19.3	16.9	15.1	13.8	12.8	6.88


### Constant Power Discharge (Watts) at 20°C

F.V/Time	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	210.5	166.3	127.7	107.3	68.3	52.2	43.4	37.6	32.6	28.9	26.1	23.9	22.6	12.5
1.80V/cell	238.0	184.1	139.8	117.8	73.6	55.7	45.8	39.4	34.1	30.2	27.3	25.1	23.6	13.0
1.75V/cell	264.5	200.7	150.1	125.5	77.8	58.8	47.9	40.8	35.2	31.2	28.1	25.8	24.0	13.2
1.70V/cell	281.8	213.0	158.2	132.0	82.0	61.0	49.3	41.9	36.3	32.1	28.9	26.5	24.6	13.4
1.67V/cell	290.0	219.0	162.7	136.2	83.7	62.7	50.4	42.7	36.8	32.5	29.3	26.7	24.8	13.5
1.60V/cell	310.8	232.2	173.4	143.9	86.7	64.9	52.1	43.9	37.6	33.1	29.7	27.3	25.3	13.6


#### Discharge Characteristics

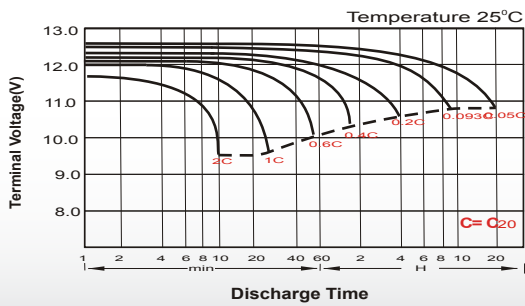


#### Charging Characteristics

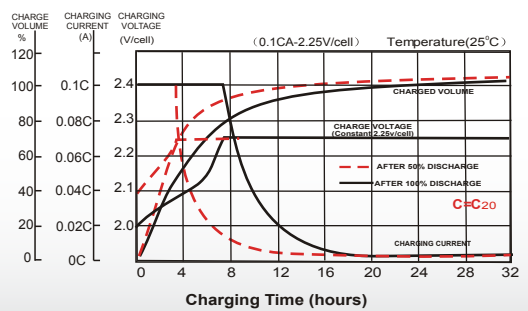


#### Temperature Effects in Relation to Battery Capacity

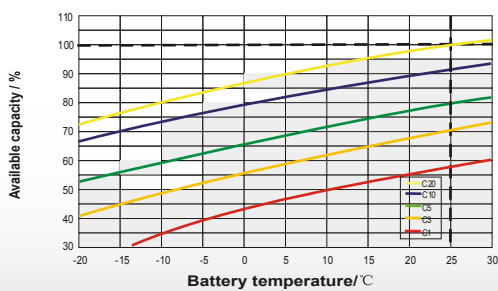

#### Effect of Temperature on Long Term Float Life

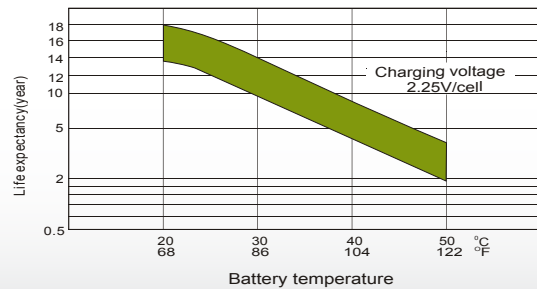

#### Cycle Life in Relation to Depth of Discharge

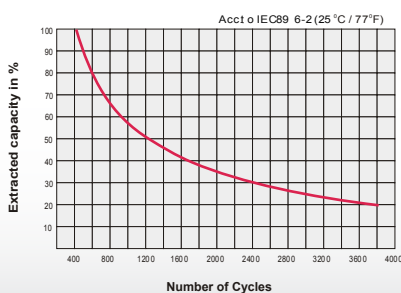

#### General Relation of Capacity VS. Storage Time

