

The OPzS series is a traditional tubular plate flooded battery which offers 20+ years design life According to the standard IEC60896-11. With a new design and technical improvement, it offers maximum efficiency and reliability for the widest variety of applications. This series is highly suited for all standby power applications that require the highest levels of reliability and security.

2V Voltage	200Ah Capacity	Tubular Flooded	20+years Design life
----------------------	--------------------------	---------------------------	--------------------------------



- Complied standards**
- IEC 60896-11
 - DIN40736
 - IEC61427
 - Eurobat guide, long life

Features and Benefits

- Tubular positive plate with prolonged cycle life
- Wide operating temperature range from -40°C to 60°C
- Tubular positive plate with prolonged cycle life
- Lead calcium die cast grid with improved corrosion resistance capability
- Dry charged package and delivery ensure longer shelf life
- Explosive-proof with special designed vented plug
- Excellent deep discharge recovery capability

Construction

- Positive plate Tubular plate with die cast Pb-Ca alloy grid
- Negative plate - Balanced Pb-Ca grid for improved recombination

Efficiency

- Separator - Leaf shape rubber separator
- Electrolyte - Dilute high purity sulphuric acid of 1.240 specific Gravity
- Battery container is SAN, cover is ABS
- Pillar seal - 100% factory tested, proven two layers epoxy resin Seal
- Relief valve - Complete with integrated flame arrestor


Applications

- Telecom
- Electric Utilities
- Railroad Utilities
- Outdoor applications
- Power Utility
- UPS systems
- Photovoltaic Systems
- Medical Equipments
- Renewable Energy Systems





Technical Specifications

Nominal Voltage.....	2V(1 cells per unit)
Nominal Capacity(20°C).....	200Ah
Dimension(mm).....	L103 x W206 x H354 x TH409mm
Approx. Weight	
Without electrolyte.....	13.0kg (28.7lbs)
With electrolyte.....	17.5kg (38.6lbs)
Electrolyte(Diluted sulphuric acid of 1.240g/cm ³ (20°C)).....	4.5kg
Terminal Type.....	Female Copper Insert M8(torque:10~12N.m)
Internal Resistance.....	0.8mΩ(fully Charged @20°C)
Max.Charge Current.....	40A
Max.Discharge Current (5s).....	1000A
Short Circuit Current.....	2600A
Ambient Temperature	
Discharge.....	-25-65°C
Charge.....	-20-65°C
Storage.....	-15-40°C
Capacity Affected by Temp.(10 hour)	
105% @40°C	
85% @0°C	
60% @-20°C	
Self-Discharge @20°C.....	Approx.4% per month
Charge Voltage @20~25°C	
Float charge voltage.....	2.21V-2.25V
Equalize Charge Voltage.....	2.35V-2.40V

Dimensions

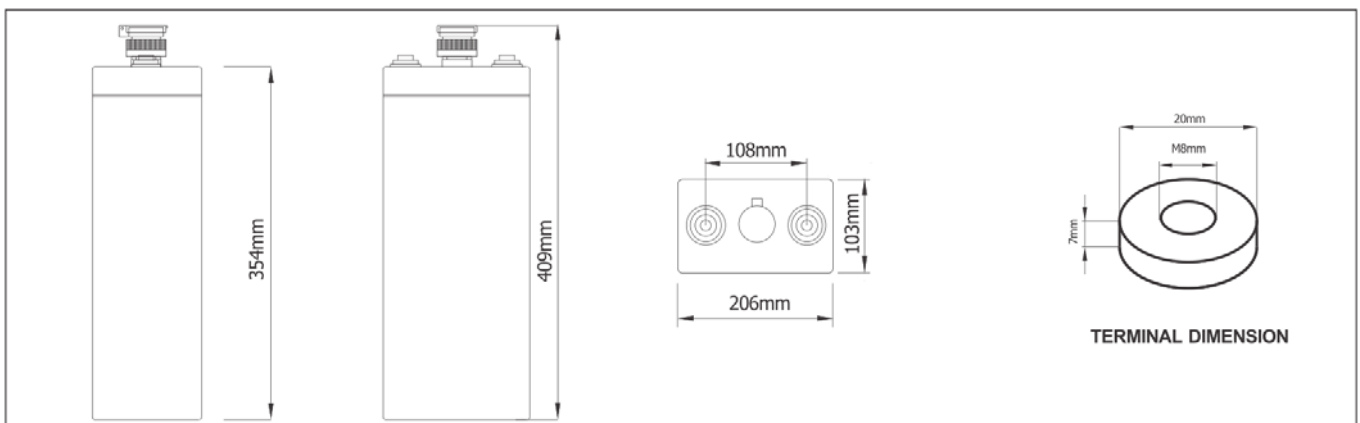

Performance Characteristics

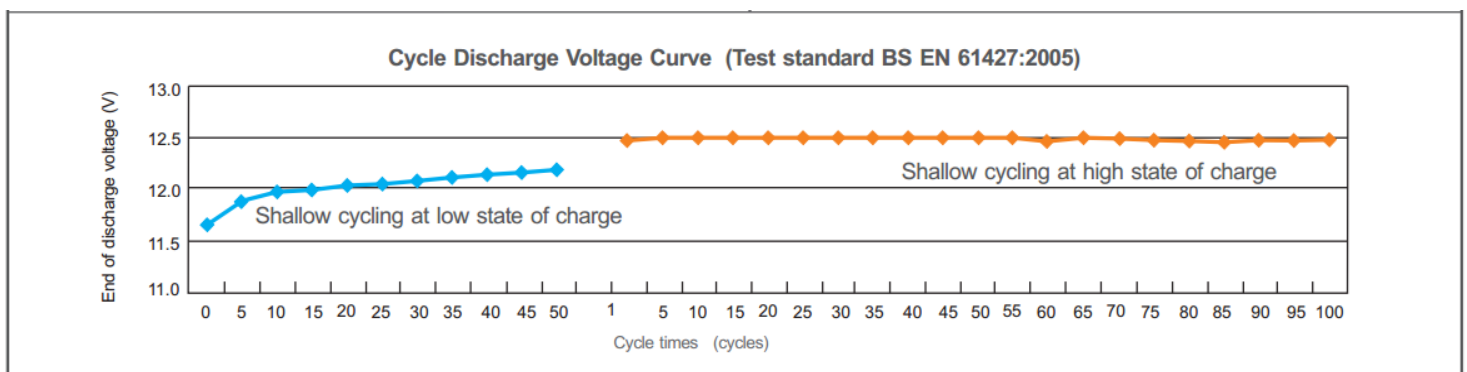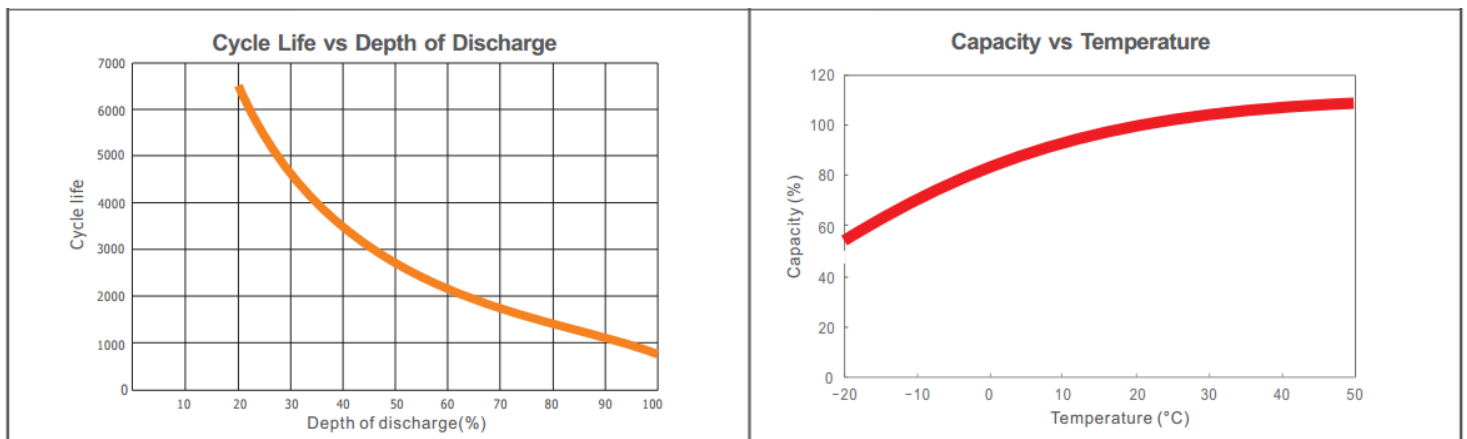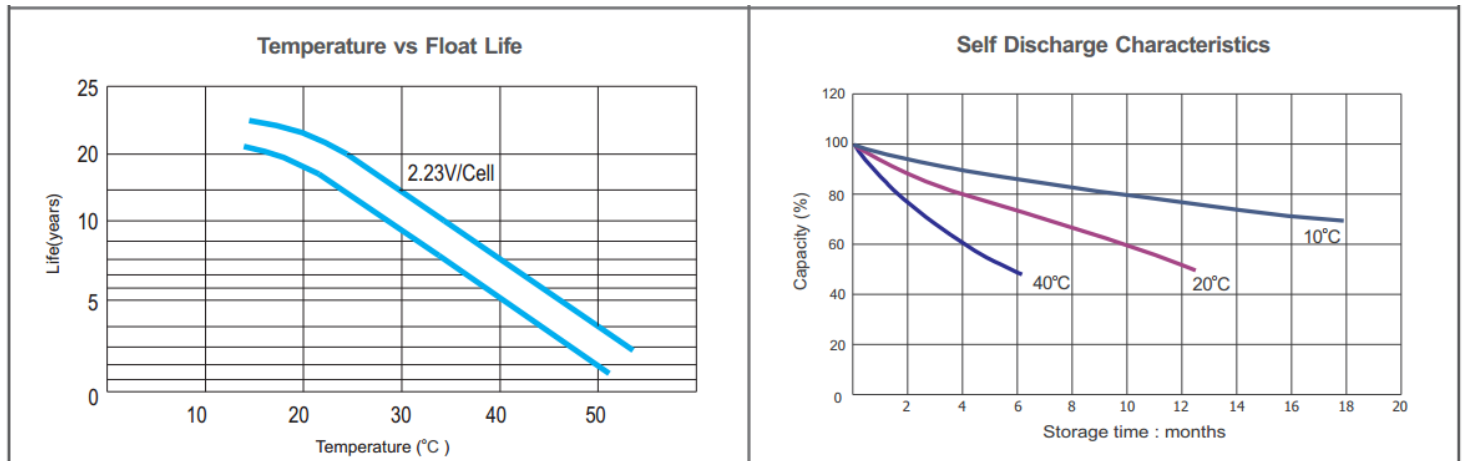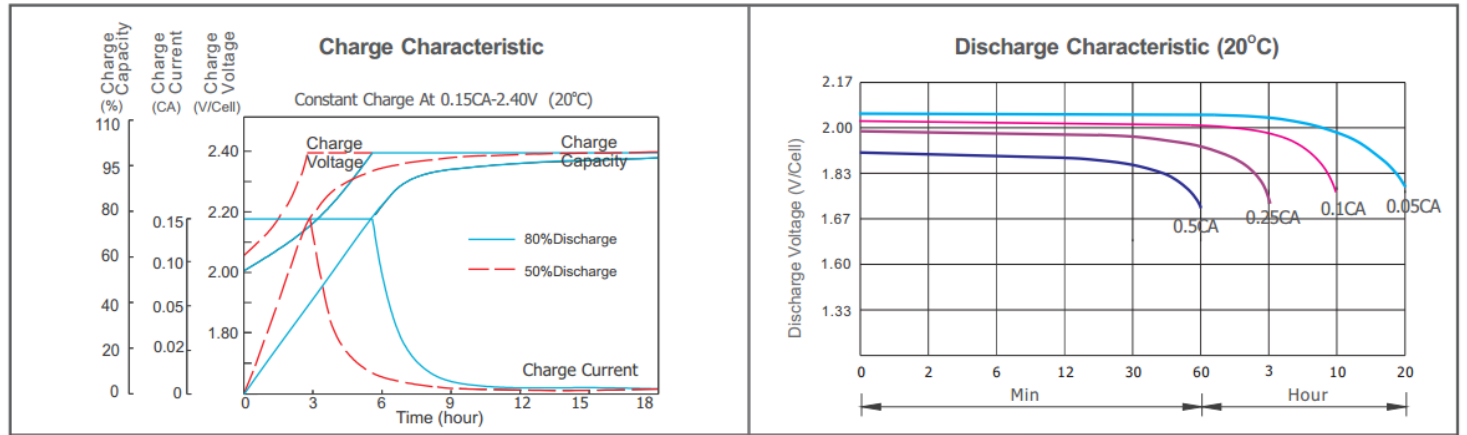

Battery Discharge

Discharge Constant Current per Cell (Amperes at 25° C)

F.V./Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8 h	10 h	20h
1.90V	79.8	72.6	66.0	64.6	59.8	46.8	37.8	31.8	27.8	20.6	18.2	10.0
1.85V	86.2	82.6	81.2	80.8	68.0	51.8	41.8	35.2	32.6	21.8	19.0	10.5
1.80V	138	132	129	111	87.4	61.0	51.2	40.0	34.6	24.6	20.0	11.0
1.75V	165	158	154	127	97.4	66.0	53.0	41.6	35.6	25.0	20.6	11.6

Discharge Constant Power per Cell (Watts at 25° C)

F.V./Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8 h	10 h	20h
1.90V	155	141	126	122	115	100	82.2	69.4	59.6	43.4	37.6	20.2
1.85V	167	160	156	152	131	113	86.0	77.2	66.2	47.4	40.8	22.0
1.80V	267	256	220	203	171	137	109	89.4	75.6	53.4	44.0	22.8
1.75V	320	307	225	205	173	142	116	94.6	79.0	54.2	45.8	23.4

Long time discharge capacity for solar & wind applications

Capacity	C ₂₄ (Ah)	C ₄₈ (Ah)	C ₇₂ (Ah)	C ₁₀₀ (Ah)	C ₁₂₀ (Ah)	C ₂₄₀ (Ah)
OPzS2-200	226	248	260	270	274	280
Final Voltage	1.85 V					

Solar & wind applications parameters settings

Over voltage disconnect:	2.47±0.01V/cell @ 20~25°C
Regulation/equalize voltage:	2.40±0.01V/cell @ 20~25°C
Array reconnection voltage:	2.23±0.005V/cell @ 20~25°C
Float voltage setting:	2.25±0.005V/cell @ 20~25°C
Low voltage alarm voltage:	1.95±0.005V/cell @ 20~25°C
Low voltage disconnect:	1.90±0.005V/cell @ 20~25°C
Load reconnect voltage:	2.09±0.01V/cell @ 20~25°C
Temp. compensate coefficient:	-4mV/cell/°C