




- Completely sealed and maintenance free
- Tough ABS case
- Insert terminals
- IATA approved for safe air transport

Oz Charge® GEL batteries are well proven in arduous deep-cycle applications such as wheelchairs, scooters, golf-carts, floor-scrubbers as well as solar. They are also ideal for high reliability engine start applications such as boats and race cars.

- INDRI 18888888 188

CHARGE

FEATURES AND SPECIFICATIONS		CAPACITY Ampere Hour (Ah)		RESERVE CAPACITY Minutes Discharged	
Nominal voltage	6۷	C1	145	75A	156
Cyclic voltage	7.0 - 7.2V (25º C)	C3	178	25A	545
Float voltage	6.8 - 6.9V (25°C)		170	Lon	040
Terminal type	M8	C5	191	20A	703
Weight	34 Kg	C10	212	15A	950
Dimensions	260 (L) x 180 (W) x 268 (H) mm	000	235	84	1940
CCA	850A (-18ºC)	C20	2JU	OA	1740
MCA	1108A (0°C)	C100	270		

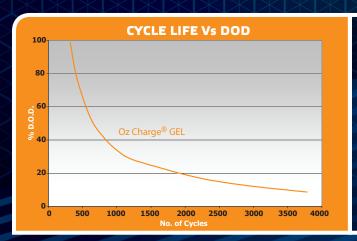

SICK OF BATTERIES THAT LEAVE YOU UP THE CREEK?

Oz Charge[®] Gel batteries perform a greater number of discharge cycles over their lifetime therefore delivering a lower lifetime cost and higher reliability. This is because of their dedicated cyclic plate design, and the same extensive R&D, special chemical process and strict ISO-9001/14001 quality and manufacturing standards as their AGM counterparts.

Oz Charge[®] Gel batteries perform as well as some of the most expensive European brands at a realistic price, so you can count

You can **EXTEND THE LIFE OF YOUR BATTERY** by using a compatible Oz Charge[®] Battery Charger & Maintainer.

12 MONTH WARRANTY THROUGHOUT AUSTRALIA

www.ozcharge.com.au