

GEL12-100 12V100AH

GEL SERIES-GEL Battery



Specification

Nominal Voltage	12V	
Nominal Capacity(10HR)	100AH	
Dimension	Length	407 ± 3mm (16.0 inches)
	Width	173 ± 2mm (6.81 inches)
	Container Height	208 ± 2mm (8.18 inches)
	Total Height (with Terminal)	233 ± 2mm (9.17 inches)
Approx Weight	Approx 28Kg (61.8lbs)	
Terminal	T11	
Container Material	ABS	
Rated Capacity	105.0 AH/5.25A	(20hr ,1.80V/cell,25°C/77°F)
	100.0 AH/10.0A	(10hr,1.80V/cell,25°C/77°F)
	87.2 AH/17.4A	(5hr,1.75V/cell,25°C/77°F)
	79.4 AH/26.5A	(3hr,1.75V/cell,25°C/77°F)
	61.1 AH/61.1A	(1hr,1.60V/cell,25°C/77°F)
Max. Discharge Current	1000A (5s)	
Internal Resistance	Approx 5.5mΩ	
Operating Temp.Range	Discharge : -30~ 50°C (5 ~122°F)	
	Charge : 0 ~40°C (32 ~104°F)	
	Storage : -30~ 40°C (5 ~104°F)	
Nominal Operating Temp. Range	25 ±3°C (77 ±5°F)	
Cycle Use	Initial Charging Current less than 30 A.Voltage	
	14.4V~14.9V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Capacity affected by Temperature	40°C (104 °F)	103%
	25°C (77 °F)	100%
	0°C (32 °F)	86%
Self Discharge	Techfine GEL series batteries may be stored for up to 9months at 25°C(77°F)and battery should be recharge before use. For higher temperatures the time interval will be shorter.	

Applications

- ◆ Telecommunications
- ◆ Solar system
- ◆ Wind power system
- ◆ Engine starting
- ◆ Wheelchair
- ◆ Floor cleaning machines
- ◆ Golf trolley
- ◆ Boats

ISO 9001	ISO 14001	OHSAS 18001	TLC
CE	RoHS	UL	BV Battery

Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	84.6	66.4	50.7	42.4	26.9	20.5	17.0	14.7	12.3	10.9	9.8	8.96	8.47	4.61
1.80V/cell	96.9	74.2	55.9	46.8	29.1	22.0	18.0	15.4	12.9	11.4	10.3	9.42	8.85	4.80
1.75V/cell	108.9	81.6	60.4	50.1	30.9	23.2	18.9	16.0	13.3	11.8	10.6	9.7	9.00	4.90
1.70V/cell	117.3	87.4	64.1	53.0	32.7	24.2	19.5	16.5	13.8	12.2	10.9	10.0	9.23	4.96
1.67V/cell	122.1	90.8	66.4	55.0	33.6	24.9	20.0	16.8	14.0	12.3	11.1	10.1	9.34	5.01
1.60V/cell	132.3	97.2	71.3	58.4	34.9	25.9	20.7	17.4	14.4	12.6	11.3	10.3	9.53	5.08

Constant Power Discharge (Watts) at 25°C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	161.9	128.0	98.2	82.6	52.6	40.2	33.4	28.9	24.3	21.6	19.5	17.8	16.9	9.20
1.80V/cell	183.0	141.6	107.5	90.7	56.6	42.9	35.3	30.3	25.4	22.5	20.4	18.7	17.6	9.57
1.75V/cell	203.4	154.4	115.4	96.5	59.8	45.2	36.8	31.4	26.3	23.3	21.0	19.3	17.9	9.75
1.70V/cell	216.8	163.9	121.7	101.6	63.1	46.9	37.9	32.3	27.1	24.0	21.6	19.7	18.3	9.86
1.67V/cell	223.1	168.5	125.1	104.8	64.4	48.2	38.7	32.8	27.5	24.3	21.9	20.0	18.5	9.95
1.60V/cell	239.1	178.7	133.4	110.7	66.7	49.9	40.1	33.8	28.1	24.7	22.2	20.3	18.9	10.1


Note The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.

GEL12-100 12V100AH GEL SERIES-GEL Battery


Dimensions

T11 Terminal


Unit: mm [inches]

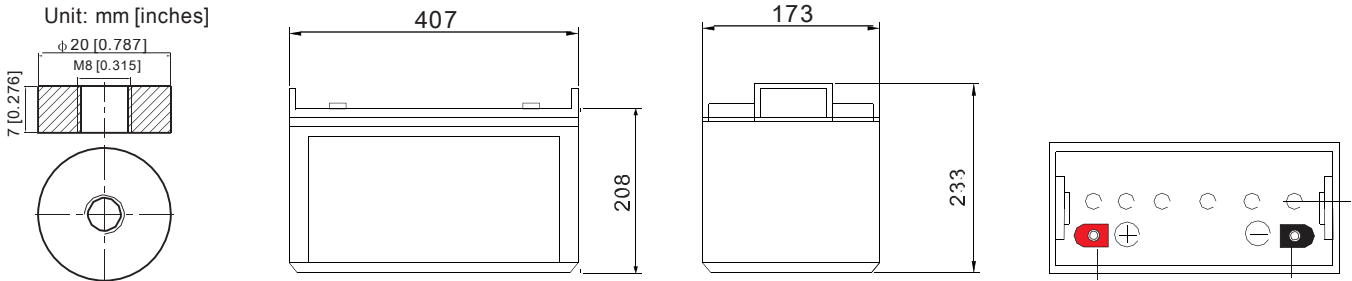


Float Charging Characteristics

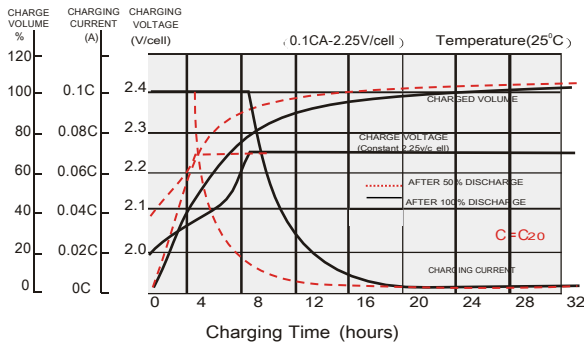


Discharge Characteristics

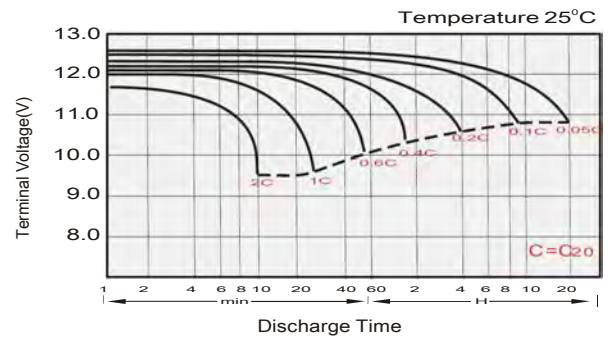

Temperature Effects in Relation to Battery Capacity

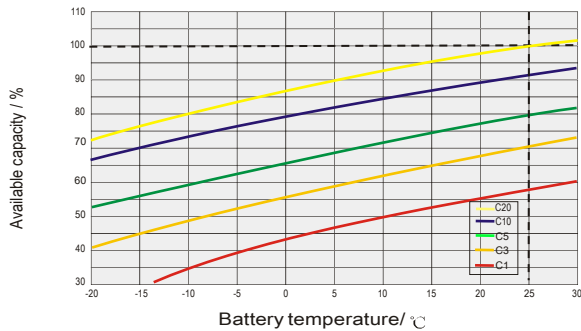


Effect of Temperature on Long Term Float Life

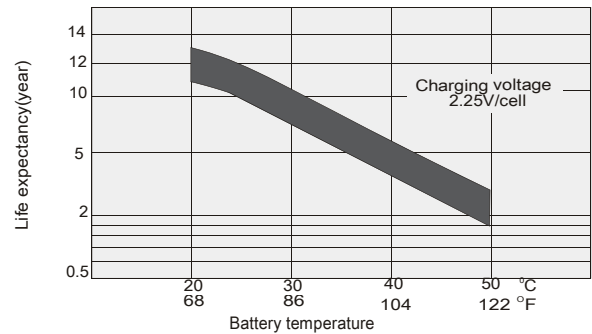


Cycle Life in Relation to Depth of Discharge

Testing condition
Discharging: current 0.17C (FV 1.7V/cell);
Charging: current 0.25C max, voltage 2.45V/cell;
Charging volume: 125% of discharged capacity.

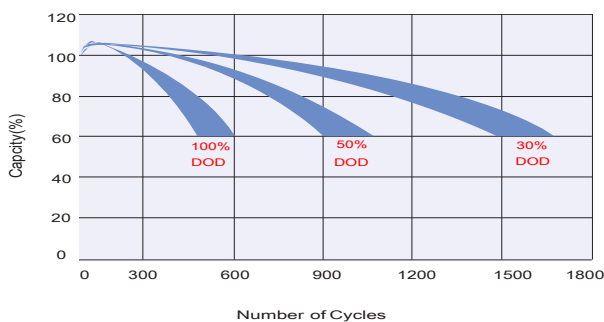

General Relation of Capacity VS. Storage Time

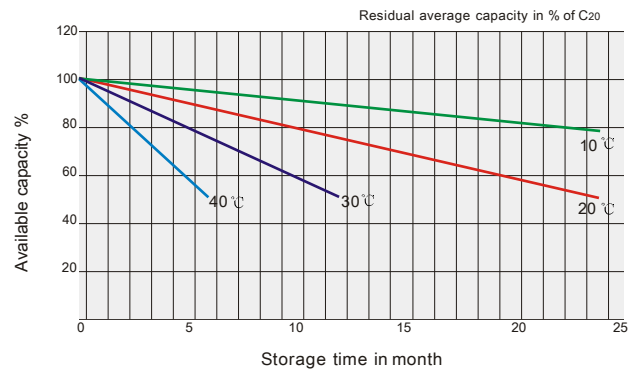

TECHFINE GEL BATTERIES

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice. Contact us for the latest information.