

# OH-M10/120H

Monocrystalline Module

**435-455W**

**455W** Maximum Power Output


**21.0%** Maximum Module Efficiency

**0~+5W** Power Output Guarantee

Cell Type



9BB/10BB(182mm)

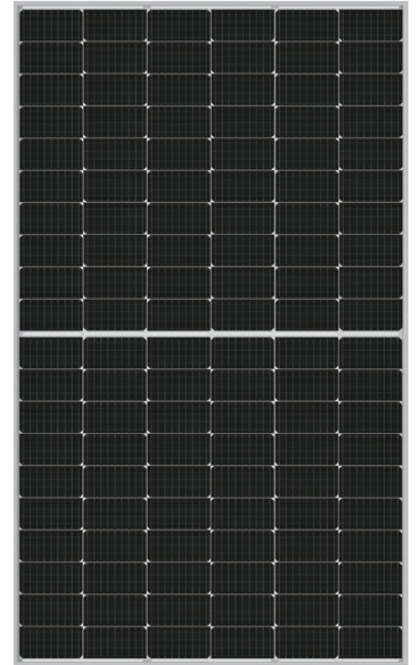

Ideal choice for large scale ground installation



Selected encapsulating material and stringent production process control ensure the product is highly PID resistant and snail trails free



Special cutting and soldering technology leads to low hot spot risk



Sand blowing test, salt mist test and ammonia test passed to endure harsh environments



Optimized system performance due to module level current sorting




Highly transparent self-cleaning glass brings additional yield and easy maintenance

## Deliver Reliable Performance Over Time

- manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO9001:2015, ISO14001: 2015 and OHSAS: 18001 2007
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing test: IEC 61701, IEC 62716, DIN EN 60068-2- 68)
- Long term reliability tests
- 2x100% EL inspection ensuring defect-free modules

## Linear Performance Warranty

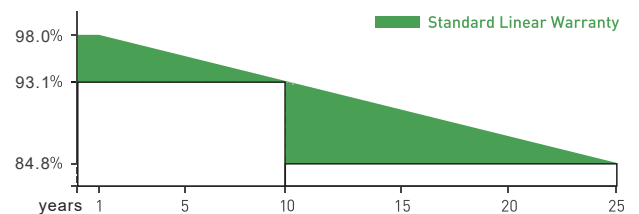

**12 Years Product Warranty 25 Years Linear Power Warranty**

\* Please refer to standard warranty for details



### Electrical Specification (STC\*)

Maximum Power	Pmax(W)	435	440	445	450	455
Maximum Power Voltage	Vmp(V)	33.63	33.72	33.82	33.91	34.06
Maximum Power Current	Imp(A)	12.93	13.05	13.16	13.27	13.36
Open Circuit Voltage	Voc(V)	40.94	41.02	41.10	41.18	41.33
Short Circuit Current	Isc(A)	13.68	13.73	13.79	13.85	13.93
Module Efficiency	(%)	20.2	20.4	20.6	20.8	21.0
Power Output Tolerance	(W)			0-+5		

\*Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, Air Mass 1.5

### Electrical Specification (NOCT\*)

Maximum Power	Pmax(W)	323	327	331	335	339
Maximum Power Voltage	Vmp(V)	31.78	31.83	31.87	31.92	31.97
Maximum Power Current	Imp(A)	10.19	10.29	10.39	10.49	10.60
Open Circuit Voltage	Voc(V)	39.06	39.12	39.17	39.23	39.29
Short Circuit Current	Isc(A)	10.83	10.94	11.04	11.15	11.26

\* Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s

### Mechanical Data

Number of Cells	120 Cells (6x20)
Dimensions of Module L*W*H (mm)	1908x1134x35mm (75.11 x44.64x 1.38 inches)
Weight (kg)	24.0 kg
Glass	High transparency solar glass 3.2mm (0.13 inches)
Backsheet	White
Frame	Silver, anodized aluminium alloy
J-Box	IP68 Rated
Cable	4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), 300mm (11.8 inches)
Number of diodes	3
Wind/ Snow Load	2400Pa/ 5400Pa*
Connector	MC Compatible

\*For more details please check the installation manual

### Temperature Ratings

### Maximum Ratings


Nominal Operating Cell Temperature (NOCT)	44±2°C	Operational Temperature	-40~+85°C
Temperature Coefficient of Isc	+0.048%/°C	Maximum System Voltage	1500V DC -(H)
Temperature Coefficient of Voc	-0.270%/°C	Max Series Fuse Rating	20A
Temperature Coefficient of P <sub>MAX</sub>	-0.350%/°C		

### Packaging Configuration


### Optional

Module per box	31 pieces	Connector	MC Original
Module per 40' container	744 pieces		


### Module Dimension

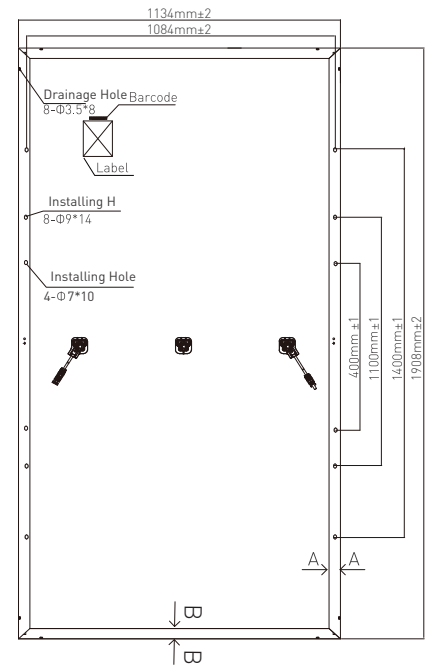

Back View

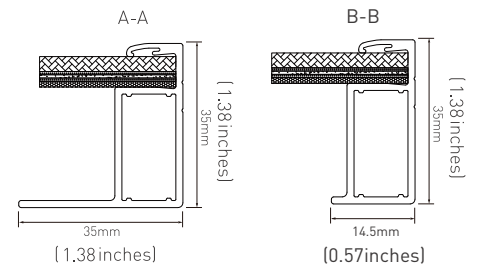

### I-V Curve at Different Temperature (455W)

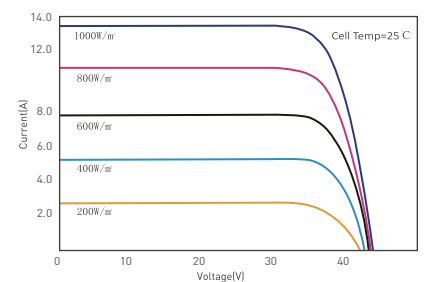

### I-V/P-V Curve at Different Irradiation(455W)

