

MC-1200


MC-1500

Powerful & Durable
Reliable Outing Power Source



CE UN38.3 RoHS



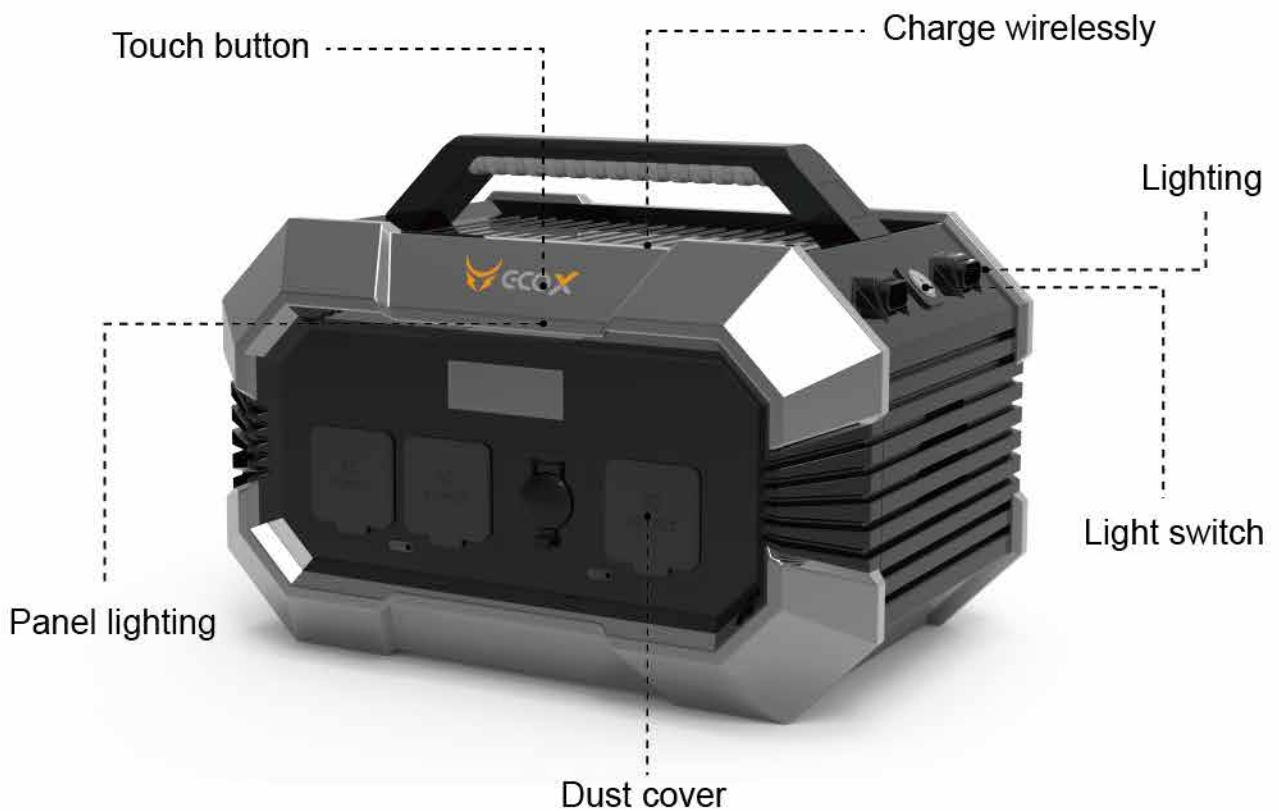

MC-1200

MC-1500

CAPACITY

1209wh (336000mAh)

1411wh (392000mAh)

OUTPUT

AC Output Ports: 2
AC Output Power: 1200w
Max: 2000w, 220V, AC50HZ

AC Output Ports: 2
AC Output Power: 1500w
Max: 2000w, 220V, AC50HZ

USB Ports: 2
Parameters: 10w, 5V, DC 2A

USB Ports: 2
Parameters: 10w, 5V, DC 2A

TYPE-C: 2
Parameters: 65w5-20V, DC 3.25A

TYPE-C: 2
Parameters: 65w5-20V, DC 3.25A

Cigarette Lighter Port: 1
Parameters: 120w, DC 10A

Cigarette Lighter Port: 1
Parameters: 120w, DC 10A

Wireless Charging: 1
Parameters: 15W

Wireless Charging: 1
Parameters: 15W

INPUT

AC Charging
Input Voltage:
220V-240V(50HZ/60HZ)
Input Power: 400w
Charging Time: 2.6h

AC Charging
Input Voltage:
220V-240V(50HZ/60HZ)
Input Power: 400w
Charging Time: 3.6h

Cigarette Lighter Charging
Input Power: 120W
Charging Time : 8h

Cigarette Lighter Charging
Input Power: 120W
Charging Time : 12h

Solar Charging
Input Power: 400w, 10-65V,
DC10A(MAX)
Charging Time: 3.5h (110w×4)

Solar Charging
400w, 10-65V,
DC10A(MAX)
Charging Time: 7h (110w×4)

CELLS

CELL Type
DLG 18650 Lithium ion Cells

CELL Type
Samsung 18650 Lithium ion Cells

Discharging Temperature:
-20℃-60℃ +/-3℃

Discharging Temperature:
-20℃-60℃ +/-3℃

Charging Temperature:
0-45℃ +/-3℃

Charging Temperature:
0-45℃ +/-3℃

Battery Life ≥ 800 Cycles
(80%DOD)

Battery Life ≥ 800 Cycles
(80%DOD)

DIMENSIONS

40×28.9×28.6cm

WEIGHT

13kg