



Wuhan Vution Lithium Power Technology Co.,Ltd

## Lithium Iron Phosphate (LiFePO4) Battery

**VT12.8-50**

**12.8V50AH 640Wh**

### Features of LiFePO4 Battery

#### Longer Cycle Life

LiFePO4 batteries would be is five times than SLA batteries on cycle life

#### High Power & Light weight

LiFePO4 batteries performance twice power of SLA batteries, while half weight helpful for transport and installation

#### Intelligent management control


Intelligent BMS system covered by LFP batteries to ensure that batteries work on safety and perfect condition

#### Lower Self-discharge rate

Lower Self-discharge rate to guarantee LFP batteries be stored more longer than SLA batteries



### Physical Dimension



### Applications

- Caravan, RV, camping
- UPS (replacement of SLA batteries)
- Marine, golf cart
- Solar, wind system
- PV ,solar light

### Electrical Characteristics

Chemistry	LiFePO4
Nominal Voltage	12.8V
Nominal Capacity	50Ah (C5,25°C)
Energy	640Wh
Internal Resistance	≤50 mΩ
Cycle Life	>5000 cycles @1C 100%DOD
Months Self Discharge	<3%
Efficiency of Charge	100% @0.5C
Efficiency of Discharge	96-99% @1C

### Standard Charge

Charge Voltage	14.6±0.2V
Charge Mode	0.2C to 14.6V, then 14.6V,charge current to 0.02C (CC/CV)
Charger Current	25A
Max. Charge Current	50A
Charge Cut-off Voltage	15.6V±0.2V

### Standard Discharge

Rated Discharge Current	25A
Max Discharge Current	50A
Max. Pulse Current	150A(<3s)
Discharge Cut-off Voltage	10V
Charge Temperature	0 °C to 45 °C (32Fto 113F) @60±25% Relative Humidity
Discharge Temperature	-20 °C to 60 °C (-4F to 140F) @60±25% Relative Humidity
Storage Temperature	0 °C to 40 °C (32Fto 104F) @60±25% Relative Humidity
Water Dust Resistance	IP65

### Mechanical

BMS	4S/4P SMART Bluetooth
Plastic Case	ABS
Dimensions (in./mm.)	257x 132 x 200 mm
Weight (lbs./kg.)	7.00kg(15.43lbs)
Terminal	M6



Wuhan Vvution Lithium Power Technology Co.,Ltd


## Lithium Iron Phosphate (LiFePO4) Battery

VT12.8-50


12.8V50AH

640Wh


Different Rate Discharge Curve(25°C)

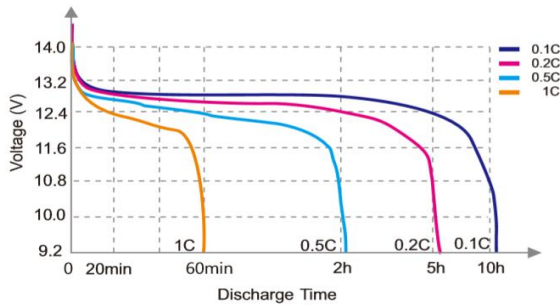


Different Temperature Discharge Curve(0.5C)

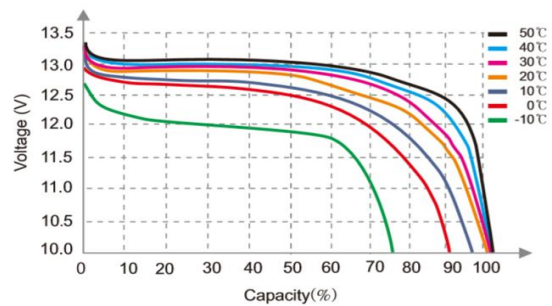


State of Charge Curve(0.5C, 25°C)

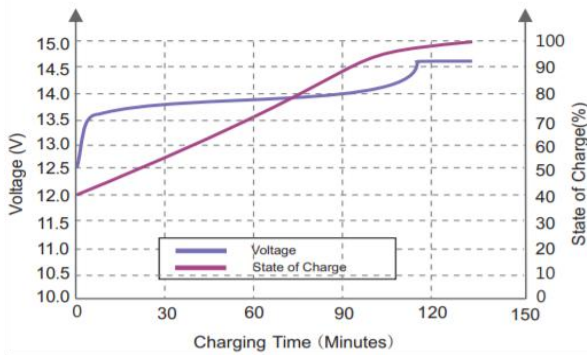


Charging Characteristics(0.5C, 25°C)

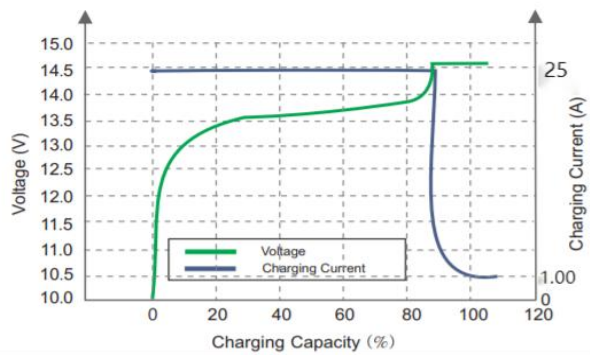

Different DOD Discharge Cycle Life Curve(1C)

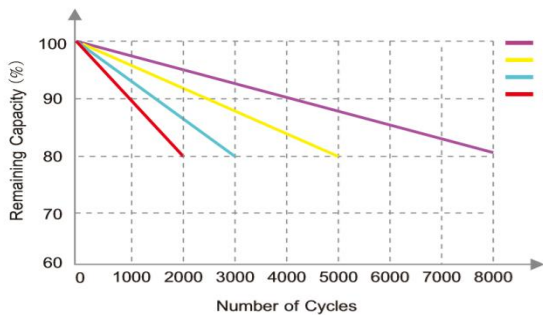

Different Temperature Self Discharge Curve

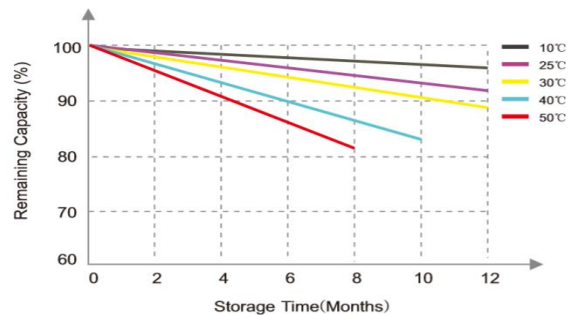

**Contact info**

[www.vvutionlithium.com](http://www.vvutionlithium.com)

Wuhan Vvution Lithium Power Technology Co.,Ltd



Tel:+86 27 5952 3598  
Email:sales6@vvutionlithium.com

Fax:+86 27 5952 3682  
www.vvutionlithium.com

Vvution  
International Sales Office

Add:24th Floor,Optics Valley Dingchuang International,Optics Valley Rare Eco Industrial Park,Wuhan,Hubei Province,China

Vvution Factory

Tel:+86 712 8655555  
Email:sales6@vvutionlithium.com

Fax:+86 712 8378825  
www.vvutionlithium.com

Add:Huaer Village,Xiannv Street Community,Hanchuan City,Hubei Province,China