

# Black Elegance Large Cells

ASP HM6-60 BE Series 320W-330W  
Monocrystalline PV-module in Black Design



**QUALITY & RELIABILITY**  
Best raw materials, optimized production process and accurate testing makes the quality difference



**GERMAN ENGINEERING**  
Best design by the art of German engineering



**SAVE INVESTMENT**  
Product warranty of 12 years  
and performance warranty of 25 years



**POSITIVE PERFORMANCE TOLERANCE**  
Up to +5 W plus-tolerance on output



**FOR ALL ENVIRONMENTAL CONDITIONS**  
Resistant against PID, sand, salt and ammonia



**STABLE AND STRONG**  
Capable to bear heavy snow loads up to 5400 Pa  
and wind loads up to 2400 Pa




**12 YEARS**  
PRODUCT WARRANTY

## OUR PERFORMANCE GUARANTEE



**25 YEARS**  
PERFORMANCE GUARANTEE

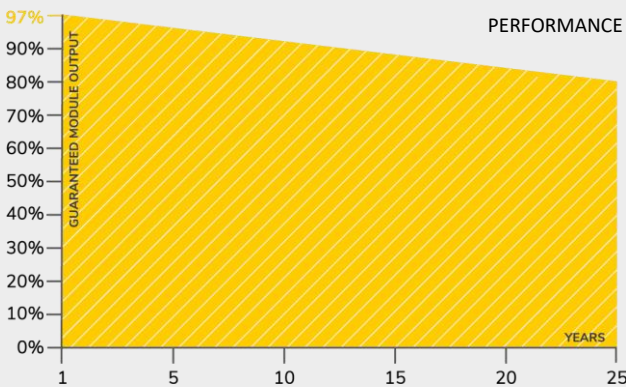

## CERTIFICATES




IEC 61215  
IEC 61730  
PERIODICAL  
INCEPTION



PID RESISTANT  
SALT MIST RESISTANT  
SAND RESISTANT  
CORROSIVE GAS (NH<sub>3</sub>)



**Quality**  
**Diligence**  
**Durability**

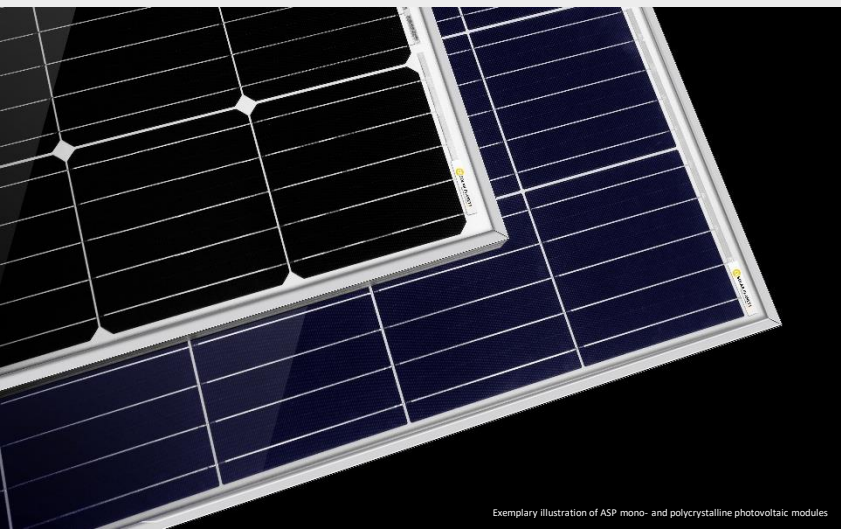

# Black Elegance Large Cells Module

ASP HM6-60 BE Series 320W-330W

## TECHNICAL DATA

ASP320HM6-72

ASP325HM6-72

ASP330HM6-72

Parameter	Unit	ASP320HM6-72	ASP325HM6-72	ASP330HM6-72
Maximum power	P <sub>max</sub> (Wp)	320	325	330
Maximum power voltage	V <sub>mp</sub> (V)	33.40	33.61	33.81
Maximum power current	I <sub>mp</sub> (A)	9.59	9.68	9.76
Open-circuit voltage	V <sub>oc</sub> (V)	40.90	41.10	41.31
Short-circuit current	I <sub>sc</sub> (A)	10.15	10.20	10.37
Module efficiency	%	19.30	19.60	19.90
Power tolerance	P <sub>max</sub> (W)	0 / +5		
Maximum system voltage DC	V	1000		
Operating temperature	°C	-40 to +85		
Temperature coefficients of P <sub>max</sub>	%/°C	-0.37		
Temperature coefficients of V <sub>oc</sub>	%/°C	-0.28		
Temperature coefficients of I <sub>sc</sub>	%/°C	0.048		
Nominal operating cell temp. (NOCT)	°C	45 ± 2		

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m<sup>2</sup> with spectrum AM 1.5 and a cell temperature of 25°C.


## MATERIAL CHARACTERISTICS

Cell type	Monocrystalline 158.75 x 158.75 mm
No. of cells	60 (6 x 10)
Dimensions	1665 x 996 x 35 mm
Weight	18.5 kg
Junction box	IP67 rated
Output cable	4.0 mm <sup>2</sup> , 900 mm length
Connector type	MC4 / MC4 compatible
Hail resistance	Max. Ø 28 mm, at 23 m/s
Wind load	2400 Pa / 244 kg / m <sup>2</sup>
Mechanical load	5400 Pa / 550 kg / m <sup>2</sup>

## PACKING INFORMATION

Packing configuration	64 pcs / double pallet
Loading capacity	896 pcs / 40 HQ
Size / pallet	1695 x 1135 x 2395 mm
Weight	1283 kg / double pallet

## DRAWINGS

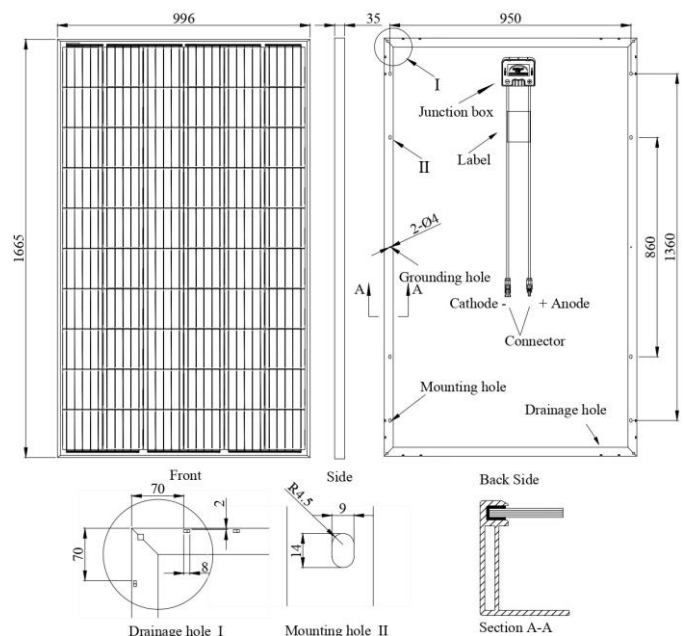

Alpha Solar Planet GmbH  
Döllgaststr. 4, 86199 Augsburg  
GERMANY

Tel.: +49 821 99972360  
Fax: +49 821 99972369

E-mail: sales@a-s-p.solar  
Web: www.a-s-p.solar

