




SKU:VB037 Voltage:12.8V Capacity:135Ah Energy:1728Wh

| ELECTRICAL SPECIFICATIONS | | |
|---------------------------|---------------|--|
| Nominal Voltage | 12.8 V | |
| Nominal Capacity | 135Ah | |
| Resistance | ≤10 mΩ | |
| Efficiency | 99% | |
| Self Discharge | <3% per Month | |
| Cell Type - Chemistry | LiFePO4 | |

| CHARGING SPECIFICATIONS | |
|-------------------------------|-----------------|
| Standard Charge Current | ≤ 50 A |
| Max Charge Current | 135A |
| Float Charge Voltage | 13.8 ± 0.2 V |
| Recommended Charge Voltage | 14.4 V - 14.6 V |
| BMS Charge Protection Voltage | 14.8 V |
| Reconnect Voltage | 14.4 V |
| Balancing Current | 30 mA |

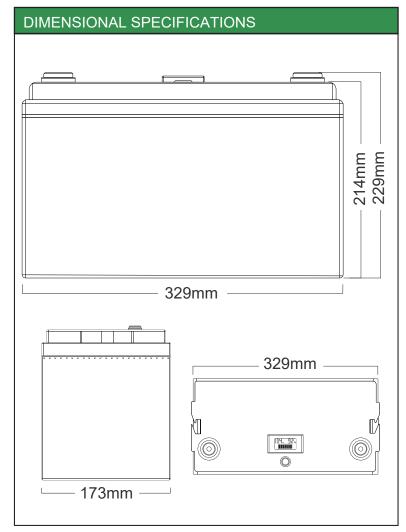



| DISCHARGING SPECIFICATIONS | |
|----------------------------------|-----------------|
| Standard Discharge Current | 67 A |
| Max Continuous Discharge Current | 135A |
| Max Discharge Current | 300 A Für 10 S |
| Peak Discharge Current | 350 A Für 5 S |
| BMS Discharge Protection Voltage | 10 V ± 0.2 V |
| Reconnect Voltage | 11.2 V ± 0.04 V |
| Short Circuit Protection | 250 μs |


| TEMPERATURE SPECIFICATIONS | |
|------------------------------|----------------|
| Discharge Temperature | -20 °C - 60 °C |
| Charge Temperature | 0 °C - 55 °C |
| BMS High Temperature Cut-Off | 65 °C |
| Reconnect Temperature | 55 °C |


| MECHANICAL SPECIFICATIONS | |
|---------------------------|----------------|
| Dimensions (L x W x H) | 329*173*229 mm |
| Weight | 15kgs |
| Terminal Type | M8 |
| Shell Material | ABS |
| IP Rating | IP65 |







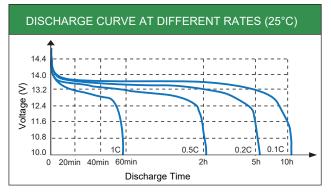


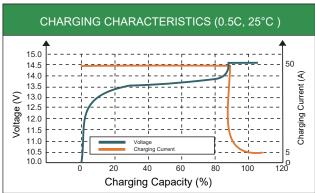

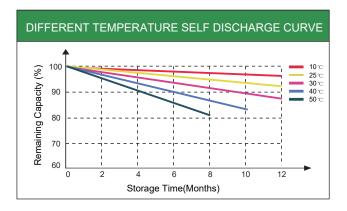

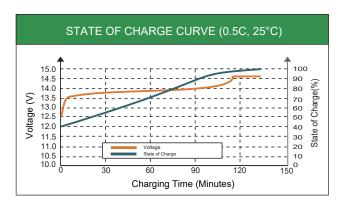

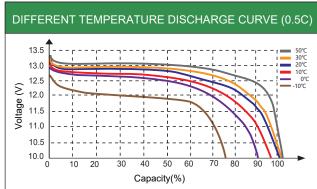

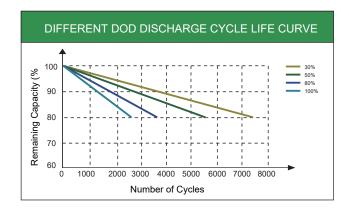

FEATURE LIFEPO4 BATTERY



HIGH TEMPERATURE RESISTANCE The peak value of lithium iron phosphate electric heating

The peak value of lithium iron phosphate electric heating can reach $350\,\text{C-}500\,\text{C}$, while lithium manganate and cobalt acidLithium is only around 200°C , with a wide operating temperature range ($-20\,\text{C-}75\,\text{C}$).



BMS CONTROL

The battery management system monitors and adapts to battery conditions to maximize performance and safety.



HIGH SECURITY

The P-O bond in the lithium iron phosphate crystal is stable and difficult to decompose. Even at high temperature or overcharge, it will not collapse and generate heat like lithium cobalt oxide or form strong oxidizing substances, so it has good safety.



ENVIRONMENTAL PROTECTION

Lithium iron phosphate batteries are generally considered to be free of any heavy metals and rare metals (the nickel-hydrogen battery requires rare metals), non-toxic (SGS certification), pollution-free and meets European RoHS regulations, and is an absolute green battery.



LONG CYCLE LIFE

At 80% depth of discharge, the number of cycles exceeds 3,000, and a 2-year warranty is provided



LIGHT WEIGHT

The volume of a LiFePO4 battery with the same specification and capacity is the volume of a lead-acid battery, the weight is 1/3 of the lead-acid battery. Allowing for simple installation and transportation.

