


PROYTEN X-STYLE

Monocrystalline

535 - 540 - 545 - 550 Wp

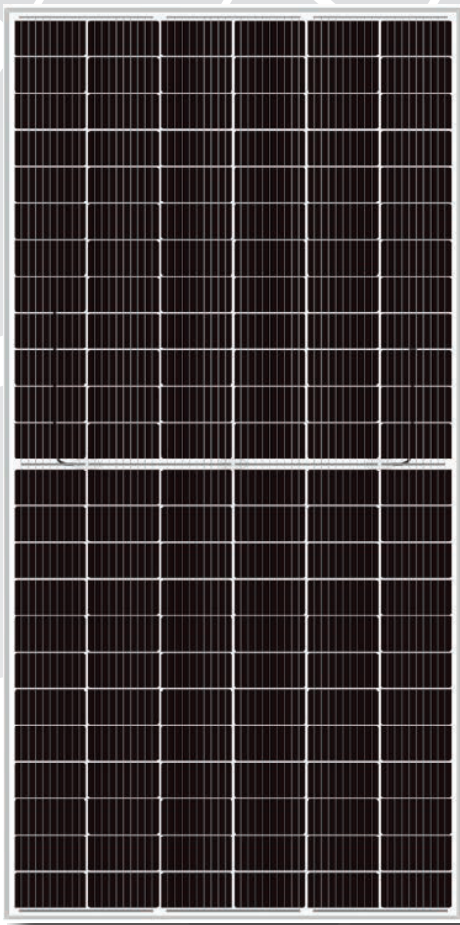

144 Half-cut cells Multi Busbar



High Voltage 1500 Vdc



Fire reaction class 1



Power tolerance



Max efficiency 21,3%



Extremely low Temp.
Coefficient -0.35%/ °C



Product Warranty



Linear Warranty

PROYTEN X-STYLE is one of a wide range of AMG Italiana Energy Storage's product. It is manufactured according to IEC 61215, IEC 61730 and CE standards. The innovative multi busbar half-cells guarantee high power per unit, reduce the risk of micro-crack, mismatch and shadow loss, so increasing the reliability of the module.

CORRESPOND TO

IEC 61215 | IEC 61730 | PV CYCLE | CE |

UNI EN ISO 9001:2008

UNI EN ISO 14001:2004


UNI EN ISO 45001:2018

| Quality management system

| Standards for environmental management system

| International standards for occupational health and safety

LINEAR WARRANTY

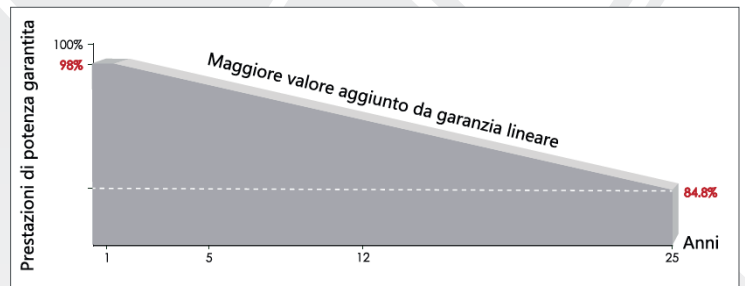

- look warranty terms -



AMG Italian Energy Storage Srl

Sede Legale:

Calata Capodichino, 76 - Napoli

Sede Operativa: Centro Direzionale,

Isola GI; Sc. D - 1° piano - Napoli

T. 081 176 12 297

P. Iva: IT01602790535

C.C.I.A.A di Napoli al R.E.A. n. 986644

Pec: amgitalianenergystoragesrl@pec.it

Info@proytenamg.com

www.proytenamg.com

FOLLOW US ON



ELECTRICAL DATA (STC)

		PXS144535K+H		PXS144540K+H		PXS144545K+H		PXS144550K+H	
		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Open circuit Voltage	(Voc)	49.34 V	46.57 V	49.42 V	46.65 V	49.51 V	46.74 V	49.60 V	46.82 V
Voltage at Pmax.	(Vmp)	40.66 V	37.92 V	40.71 V	38.11 V	40.76 V	38.19 V	40.83 V	38.25 V
Short-circuit current	(Isc)	13.79 A	11.14 A	13.85 A	11.19 A	13.94 A	11.27 A	14.04 A	11.35 A
Current at Pmax.	(Imp)	13.16 A	10.51 A	13.27 A	10.56 A	13.38 A	10.64 A	13.48 A	10.73 A
Peak Power (Pmax) Tolerance 0/+5%		535 Wp	398 Wp	540 Wp	402 Wp	545 Wp	406 Wp	550 Wp	410 Wp
Module Efficiency		20.70 %		20.90 %		21.11 %		21.30 %	
Maximum voltage		1500 V DC							
Maximum series fuse rating		25 A							
Operating Temperature		-40°C - +85°C							

Tolerance electric measurement ±3%

*** STC** (Standard test conditions)

 Irradiance 1000 w/m², Temperature 25°C, AM = 1.5

TEMPERATURE COEFFICIENT

Nominal operating cell temperature	45 ± 2 °C
Pmax Temperature Coefficient	-0.35% / °C
Voc Temperature Coefficient	-0.27% / °C
Isc Temperature Coefficient	0.048% / °C

MECHANICAL CHARACTERISTIC


Dimensions (mm)	2279 x 1134 x 35
Weight (Kg)	27.6
Solar cells type	Mono 182x 91 mm
No. solar cells	144

PACKING CONFIGURATION

Module per Pallet	31 pcs.
Modules per container 40'HQ	620 pcs.

GENERAL INFORMATION

Glass	antireflex-coated, high transmission, tempered glass 3.2 mm
Frame	Anodized aluminum
Junction Box	IP68, 3 bypass diodes
Output Cable - Connectors	1000mm/4.0mm ²

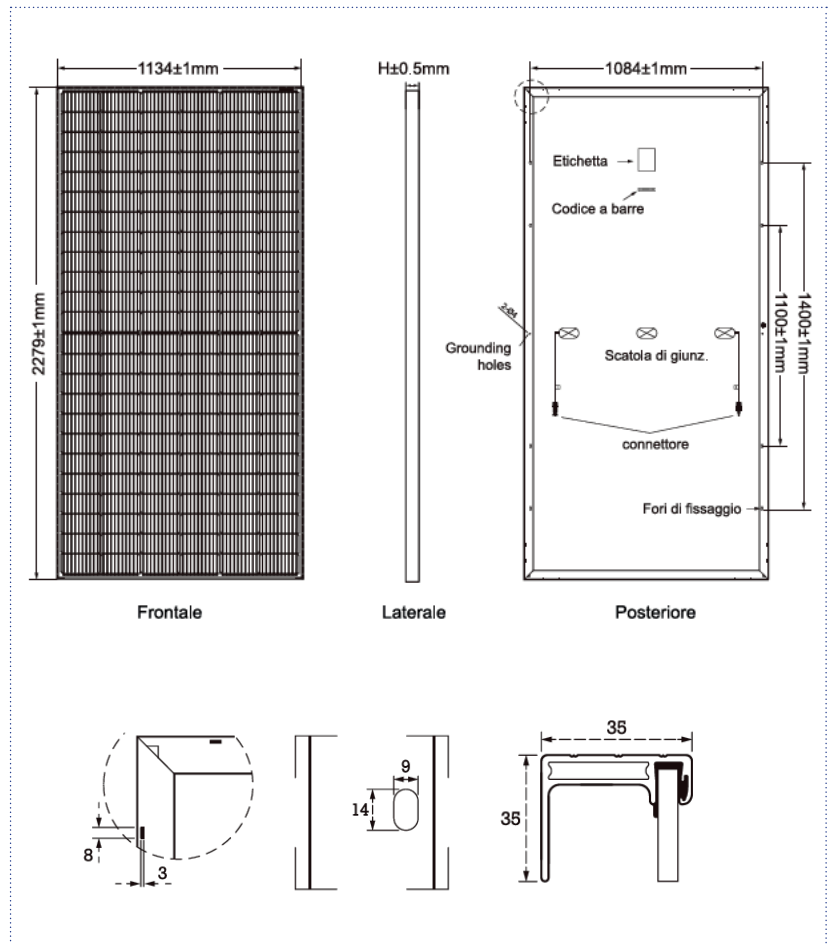

AMG Italiana Energy Storage S.r.l. reserves the right to make changes to the technical data of the product without prior notice.

The technical details of the form, although included with the utmost care, may contain errors or inaccuracies not attributable to AMG Italiana Energy Storage S.r.l.



AMG Italian Energy Storage Srl
 Sede Legale:
 Calata Capodichino, 76 - Napoli
 Sede Operativa: Centro Direzionale,
 Isola GI; Sc. D - 1° piano - Napoli

T. 081 176 12 297
 P. Iva: IT01602790535
 C.C.I.A.A di Napoli al R.E.A. n. 986644
 Pec: amgitalianenergystoragesrl@pec.it

Info@proytenamg
 www.proytenamg.com

FOLLOW US ON

