




AESOLAR

since 2003

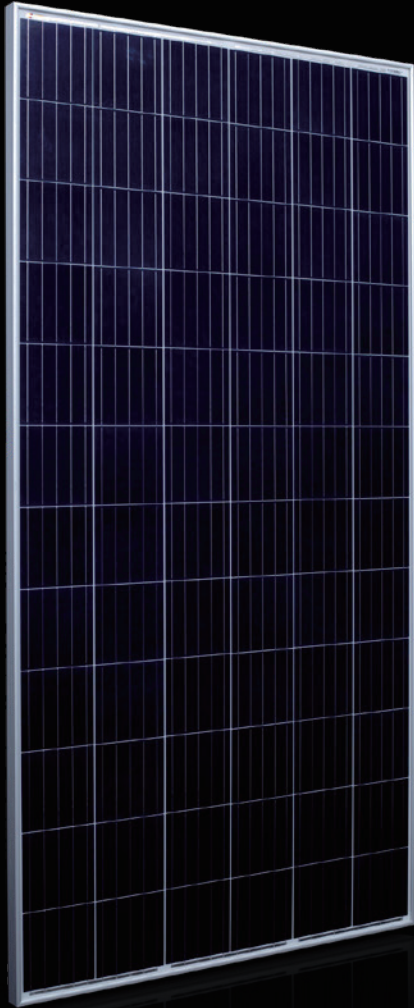

POWER PLUS

25
years

Performance
Guarantee

12
years

Product
Guarantee

325W-345W

AE P6-72 Series

POLY-CRYSTALLINE PV MODULES
FULL CELLS • MONO-FACIAL

www.ae-solar.com

72

FULL
CELLS

156
mm

CELL
SIZE




LID
RESISTANT



HIGHLY STABLE
AND TOUGH



IEC 61215
IEC 61730
Regular Production Surveillance
Type Tested and Monitored




AE P6-72 Series 325W-345W



POLY-CRYSTALLINE PV MODULES
FULL CELLS • MONO-FACIAL


Mechanical and design specification

Cell type	Poly-Si PERC, Full cells, 156.75 mm
No. of cells	72
Glass	3,2 mm, high transmission, AR coated, tempered
Encapsulation	EVA
Back cover	White Backsheet
Junction box	IP68 rated, 3 Bypass Diodes
Frame	30 mm anodized Aluminium alloy
Cable	1 x 4 mm ² , 900 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	1956 mm x 992 mm x 30 mm
Weight	20 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa/ 244 kg/ m ²
Mechanical load	5400 Pa/ 550 kg/ m ²

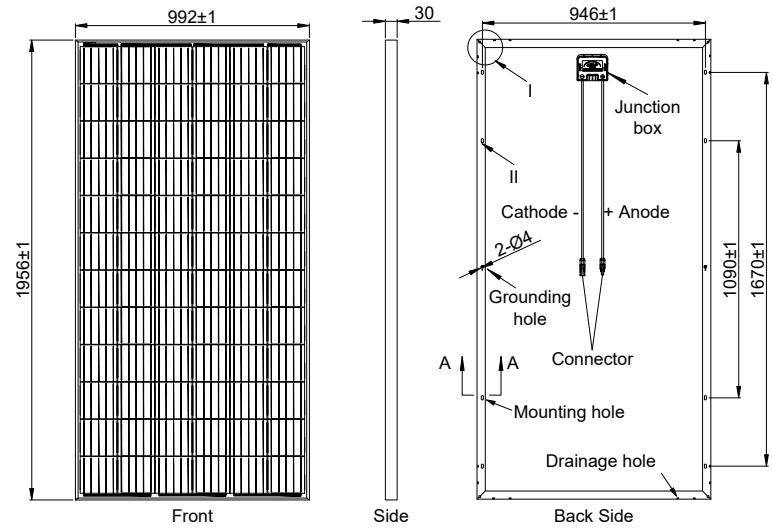



Packaging information

Packaging configuration	76 pcs / double pallets
Loading capacity	912 pcs / 40 HQ
Size / Pallet	1985 mm x 1140 mm x 2390 mm
Weight	1610 kg / double pallets

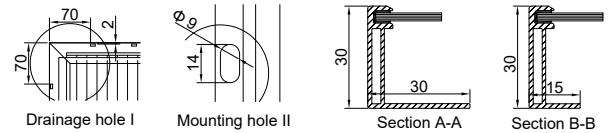

Temperature ratings

Operating temperature	(°C)	-40 to +85
Temp.coefficient of P _{max}	(%/°C)	-0.40
Temp.coefficient of V _{oc}	(%/°C)	-0.31
Temp.coefficient of I _{sc}	(%/°C)	0.053
Nom. operating temp. NOCT	(°C)	45 ± 2

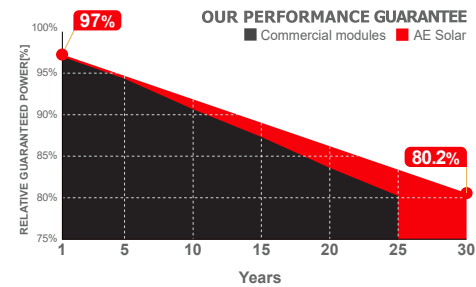

Electrical specifications (STC*):		AE325P6-72	AE330P6-72	AE335P6-72	AE340P6-72	AE345P6-72
Nominal Max. Power	P _{max} (Wp)	325	330	335	340	345
Maximum operating voltage	V _{MPP} (V)	36.83	36.97	37.05	37.09	37.14
Maximum operating current	I _{MPP} (A)	8.82	8.93	9.04	9.17	9.29
Open-circuit voltage	V _{oc} (V)	45.83	45.89	45.93	45.97	46.03
Short-circuit current	I _{sc} (A)	9.33	9.37	9.41	9.44	9.61
Module efficiency	η (%)	16.75	17.01	17.26	17.52	17.78
Power tolerance	(W)	0~+5				
Maximum system Voltage	(V)	1500				
Maximum series fuse rating	(A)	15				

*STC: Standard test conditions (Irradiance 1000 W/m², Cell temperature 25°C and air mass of AM1.5)

Electrical specifications (NMOT*):		AE325P6-72	AE330P6-72	AE335P6-72	AE340P6-72	AE345P6-72
Nominal Max. Power	P _{max} (Wp)	248	250	254	258	262
Maximum operating voltage	V _{MPP} (V)	35.04	35.12	35.20	35.24	35.28
Maximum operating current	I _{MPP} (A)	7.05	7.14	7.23	7.33	7.43
Open-circuit voltage	V _{oc} (V)	43.57	43.60	43.63	43.67	43.73
Short-circuit current	I _{sc} (A)	7.47	7.50	7.53	7.55	7.69

*NMOT: Normal Module Operating Temperature (Irradiance 800 W/m², Ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.

