

Deutsche  
Qualität  
Garantiert

**TIER 1**  
BloombergNEF



**AESOLAR**

since 2003



**AURORA**

**HIGH** ENERGY YIELD  
RELIABILITY  
DURABILITY

**30**  
years  
Performance  
Guarantee

**15**  
years  
Product  
Guarantee

**530W-550W**

**AE ME-110BS Series**

MONO-CRYSTALLINE PV MODULES  
HALF-CUT CELLS • BIFACIAL • SINGLE-GLASS

[www.ae-solar.com](http://www.ae-solar.com)

**110**

HALF  
CELLS

**210**  
mm

CELL  
SIZE



LID  
RESISTANT



PID  
RESISTANT



SALT CORROSION  
RESISTANT



SAND  
RESISTANT



AMMONIA  
RESISTANT




HIGHLY STABLE  
AND TOUGH



IEC 61215  
IEC 61730  
Regular Production Surveillance  
Type Tested and Monitored

IEC 62716 (Ammonia corrosion)  
IEC 61701 (Salt mist corrosion)  
IEC 60068 (Sand and dust)  
IEC 62804 (PID resistance)




# AE ME-110BS Series 530W-550W



MONO-CRYSTALLINE PV MODULES  
HALF-CUT CELLS • BIFACIAL • SINGLE-GLASS

## Mechanical and design specification

Cell type	Gallium-doped Mono c-Si PERC, Half-cut cells, 210 mm
No. of cells	110
Bifaciality	70±5%
Glass	3,2 mm, high transmission, AR coated, tempered
Encapsulation	EVA
Back cover	Transparent Backsheet
Junction box	IP68 rated, 3 Bypass Diodes
Frame	30 mm anodized Aluminium alloy
Cable	1 x 4 mm <sup>2</sup> , 350 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	2383 mm x 1095 mm x 30 mm
Weight	27 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa/ 244 kg/ m <sup>2</sup>
Mechanical load	5400 Pa/ 550 kg/ m <sup>2</sup>



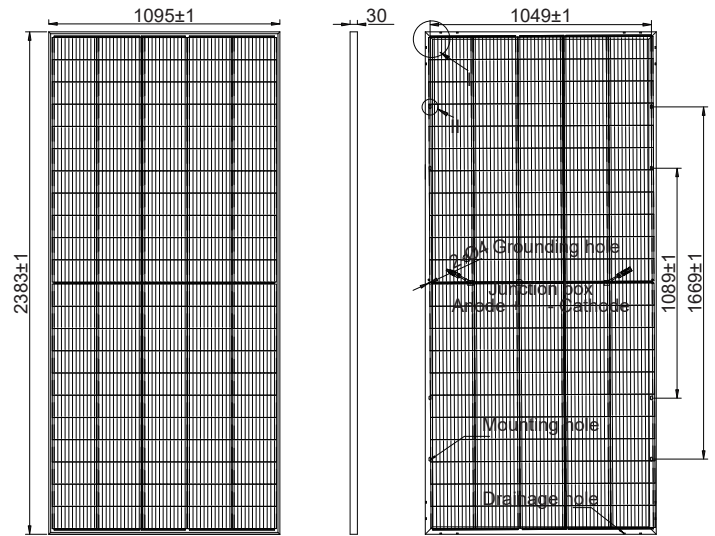


## Packaging information

Packaging configuration	36 pcs / pallet
Loading capacity	720 pcs / 40 HQ
Size / Pallet	1130 mm x 1140 mm x 2500 mm (upright)
Weight	1009 kg / pallet

## Temperature ratings

Operating temperature	(°C)	-40 to +85
Temp.coefficient of P <sub>max</sub>	(%/°C)	-0.34
Temp.coefficient of V <sub>oc</sub>	(%/°C)	-0.25
Temp.coefficient of I <sub>sc</sub>	(%/°C)	0.04
Nom. operating temp. NOCT	(°C)	43 ± 2

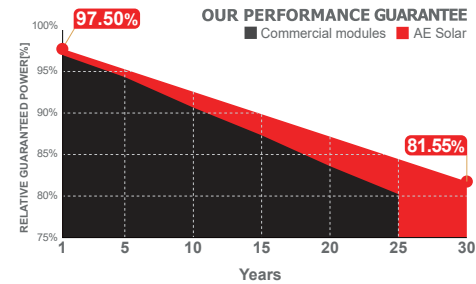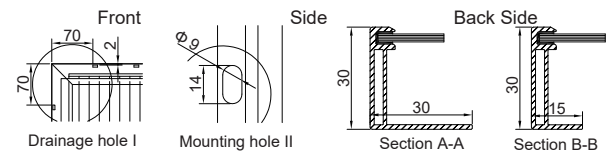

## Electrical specifications (STC\*): AE530ME-110BS AE535ME-110BS AE540ME-110BS AE545ME-110BS AE550ME-110BS

	AE530ME-110BS	AE535ME-110BS	AE540ME-110BS	AE545ME-110BS	AE550ME-110BS	
Nominal Max. Power	P <sub>max</sub> (Wp)	530	535	540	545	550
Maximum operating voltage	V <sub>MPP</sub> (V)	30.8	31.0	31.2	31.4	31.6
Maximum operating current	I <sub>MPP</sub> (A)	17.21	17.28	17.33	17.37	17.4
Open-circuit voltage	V <sub>oc</sub> (V)	37.1	37.3	37.5	37.7	37.9
Short-circuit current	I <sub>sc</sub> (A)	18.31	18.36	18.41	18.47	18.52
Module efficiency	η (%)	20.31	20.50	20.69	20.89	21.08
Power tolerance	(W)	0~+5				
Maximum system Voltage	(V)	1500				
Maximum series fuse rating	(A)	30				

\*STC: Standard test conditions (Irradiance 1000 W/m<sup>2</sup>, Cell temperature 25°C and air mass of AM1.5)

## Electrical specifications (NMOT\*): AE530ME-110BS AE535ME-110BS AE540ME-110BS AE545ME-110BS AE550ME-110BS

	AE530ME-110BS	AE535ME-110BS	AE540ME-110BS	AE545ME-110BS	AE550ME-110BS	
Nominal Max. Power	P <sub>max</sub> (Wp)	401	405	409	413	417
Maximum operating voltage	V <sub>MPP</sub> (V)	28.6	28.8	29.0	29.2	29.3
Maximum operating current	I <sub>MPP</sub> (A)	14.02	14.06	14.10	14.15	14.19
Open-circuit voltage	V <sub>oc</sub> (V)	34.9	35.1	35.3	35.5	35.7
Short-circuit current	I <sub>sc</sub> (A)	14.73	14.8	14.84	14.88	14.92

\*NMOT: Normal Module Operating Temperature (Irradiance 800 W/m<sup>2</sup>, Ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.

