


## BALLAST 20° ART. 23020

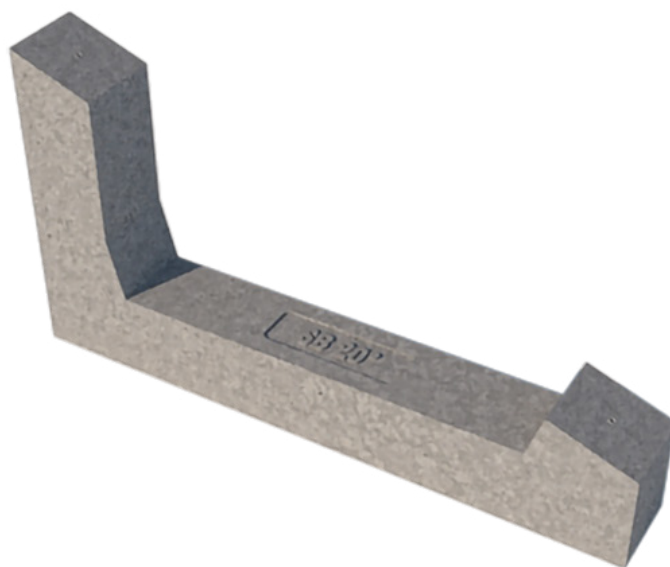


<b>MATERIAL</b>	The main material of SUN BALLAST is concrete, which allows a low wear over time and the ability to withstand even the most intense perturbations and different climatic conditions		
<b>APPLICATION</b>	Any type of flat roof with a maximum slope of 5 ° on the ground, on beaten ground with inert material or pavements		
<b>INCLINATION ANGLE</b>	20°	<b>QUANTITY FOR PALLET</b>	10 Pieces
<b>BALLAST WEIGHT</b>	54 kg	<b>PALLET DIMENSIONS</b>	98 cm x 70 cm h = 62 cm
<b>MODULE POSITIONING</b>	Horizontal / Vertical	<b>PALLET WEIGHT</b>	540 kg

## SYSTEM DETAILS



### HORIZONTAL PANEL LAYING

#### Side view

Minimum distance recommended  
between module rows 80 cm

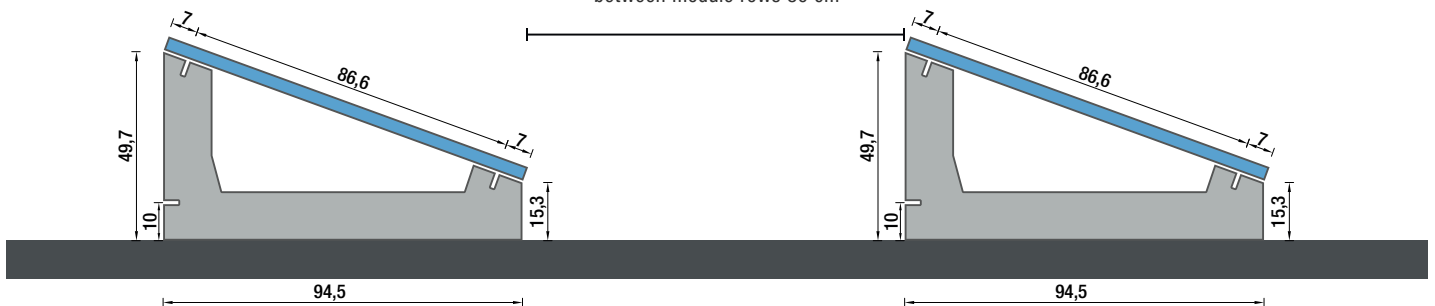


#### Top view



### VERTICAL PANEL LAYING

#### Side view

Minimum distance recommended  
between module rows 80 cm

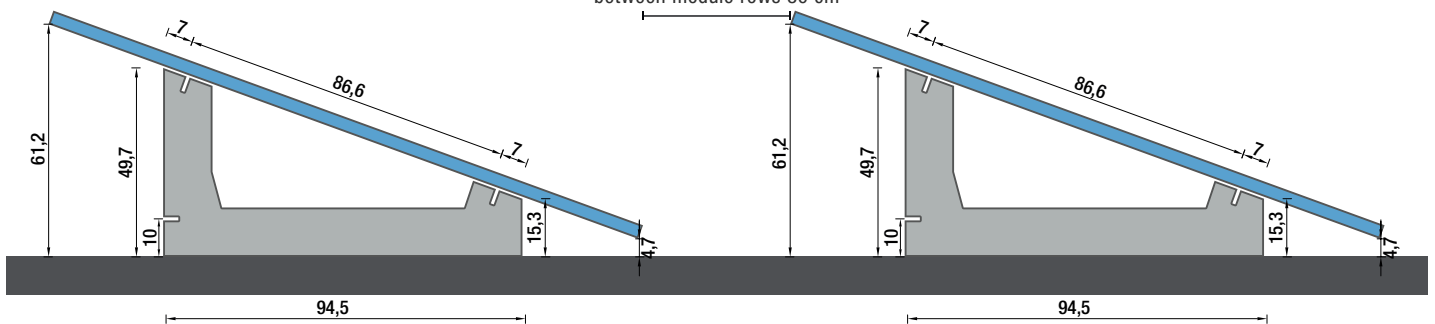

#### INFO

- The torque applied shall refer to the mechanical standard conforming to the bolt in use; with M8 bolts in stainless steel use a torque of 12 - 14 Nm
- Avoid screwdrivers impulse
- It's recommended to consult the information indicated in the assembly instructions of the panel manufacturer
- Always follow Sun Ballast assembly instructions.
- The dimensions shown in the figure are all expressed in centimeters.