

166 JY3MxxxH60(DH)-DGB

Monocrystalline Bifacial Double Glass Half Cell PV Module

Power Output : 365W - 380W

Power Tolerance : 0W ~ +5W

Maximum Efficiency : 20.4%

Highlights



Assembled with multi-busbar cells , reduce shading effect on the energy generation, lower risk of hot spot.



Pass the test for weather resistance in harsh environments (salt mist, ammonia corrosion and sand).



Process optimization of high efficiency PERC solar cell and strict control on raw materials to ensure highly resistance against PID of PV module.




Better mechanical loading tolerance with the test front side 5400pa and back side 2400pa.



Series and parallel design, reduce the series resistance RS of module, reduce the loss of internal electrical performance, and improve the power generation capacity of whole system.




Additional safety Fire class Acertified

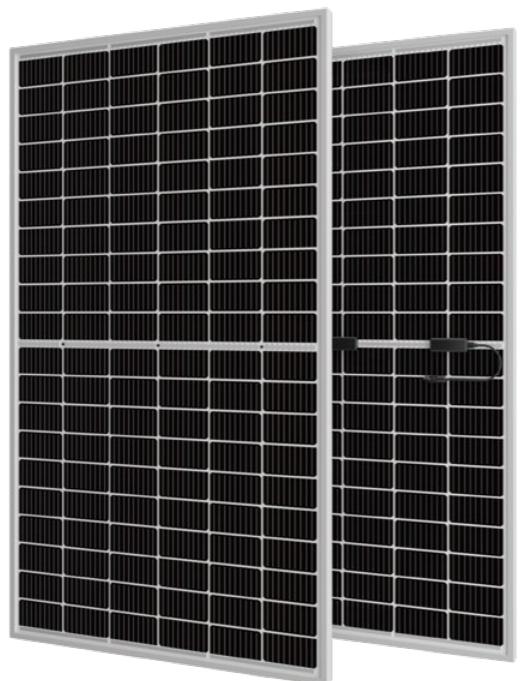

Jinyuan Offers Long-term Quality Assurance

- 12 years Product Warranty
- 30 years Linear Power Output Warranty
- The attenuation of the power output in the first year $\leq 2\%$
The annual average attenuation after the first year $\leq 0.45\%$

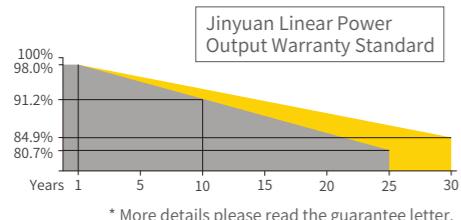

Electrical performance parameters | STC

Power Output	Pmax(W)	365	370	375	380
Rated Power Maximum Voltage	Vmp(V)	33.74	33.98	34.25	34.52
Rated Power Maximum Current	Imp(A)	10.82	10.89	10.95	11.01
Open Circuit Voltage	Voc(V)	41.05	41.21	41.37	41.52
Short Circuit Current	Isc(A)	11.35	11.41	11.47	11.53
Module Efficiency	(%)	19.6	19.8	20.1	20.4
Power Tolerance	(W)	0~+5W			

* STC : 1000W/m² irradiance, 25°C module temperature, AM1.5 spectrum.
Power measurement error +/- 3%

Electrical performance parameters | NMOT

Power output	Pmax (W)	273	277	281	286
Rated Power Maximum Voltage	Vmp (V)	30.90	31.23	31.47	31.76
Rated Power Maximum Current	Imp (A)	8.83	8.87	8.93	8.99
Open Circuit Voltage	Voc (V)	37.77	38.45	38.67	38.79
Short Circuit Current	Isc (A)	9.30	9.35	9.41	9.47

* NMOT:800W/m² irradiance, 20°C module temperature, 1m/s wind speed.
Power measurement error +/- 3%

Electrical characteristics with different rear side power gain (380W)

Double side power gain	Power output -Pmax(W)	Open Circuit Voltage - Voc(V)	Short Circuit Current - Isc(A)	Rated Power Maximum Voltage - Vmp(V)	Rated Power Maximum Current - Imp(A)
10%	402	41.05	12.49	33.74	11.90
15%	420	41.05	13.05	33.74	12.44
20%	438	41.05	13.62	33.74	12.98
25%	456	41.05	14.19	33.74	13.53


* Rear side power gain : The additional gain from the rear side compared to the power of the front side at the standard test condition. It depends on mounting (structure , height , tilt angle etc.) and albedo of the ground.
Power measurement error +/- 3%

Structure Features


Solar Cell	166MONO(Half Cell)
Solar Cell Array	120 pcs(6×20)
Module Dimension	1755×1038×30mm
Weight	24.0 kg
Glass	2.0 mm highly transparent anti-reflection coating tempered glass
Back sheet	2.0 mm highly transparent tempered glass
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm ² 、L=300 mm、PV cable
Diode Quantity	3
Wind Pressure	2400pa
Snow Pressure	5400pa
Connector	MC4 Compatible

* More details please read the installation manual.


Module Dimension

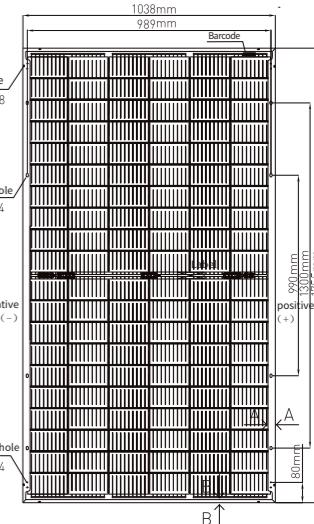


Back View

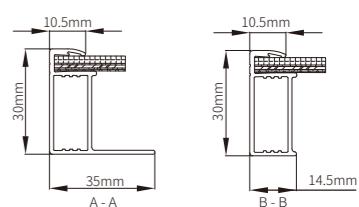

I-V curves/P-V curves of module under different irradiation(380w)

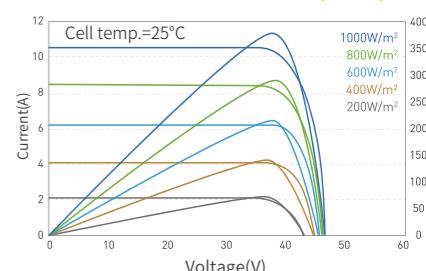

I-V curves of module under different temperature(380w)

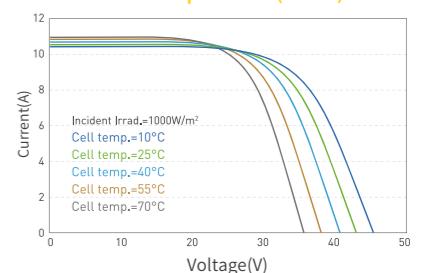

Maximum Ratings

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Maximum Fuse Rated Current	25A