


SCAN CODE TO
WATCH VIDEO



Learn more about the
production of 182mm
Mono PV Module

Sunket Linear Warranty

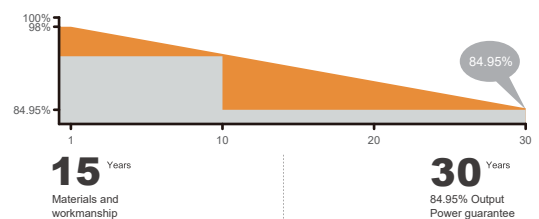

SKT530~555M10

530~555 Watt

182mm 144Cells Double Glass Bifacial
Mono Half Cell PV Module Series



MBB PERC
Half Cut Cell



Excellent Low-light
Performance



100% Inspection
Guarantee Reliability



Anti PID





Strengthened
Mechanical Load



High Density
Packaging



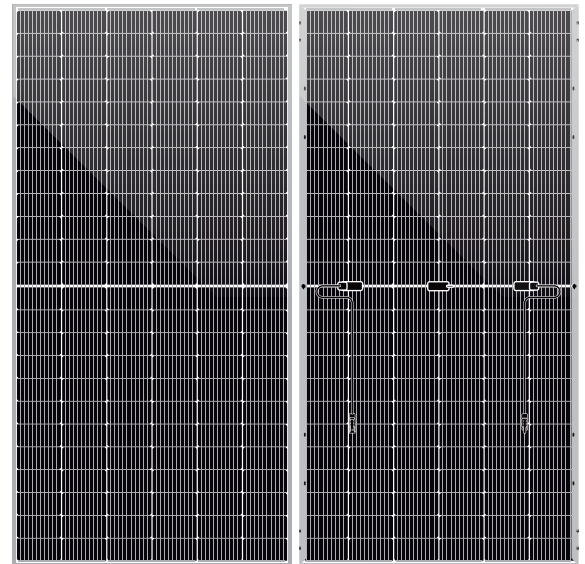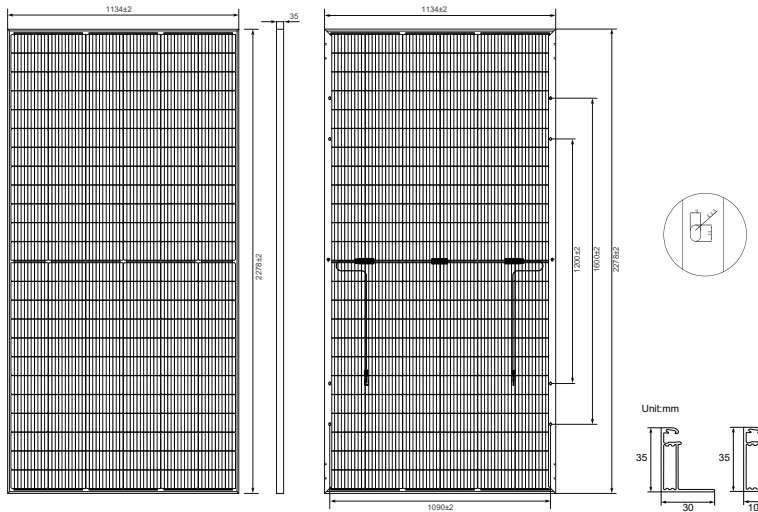

All Dimensions in mm
The above drawing is a graphical representation of the product.
For engineering quality drawings please contact SUNKET.

Electrical Characteristics (STC/NOCT)

Module Type	SKT530M10		SKT535M10		SKT540M10		SKT545M10		SKT550M10		SKT555M10	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power- Pmax(W)	530	396.2	535	399.9	540	403.6	545	407.4	550	411.1	555	414.8
Open Circuit Voltage - Voc(V)	49.20	46.26	49.35	46.40	49.50	46.54	49.65	46.68	49.80	46.82	49.95	46.97
Short- Circuit Current - Isc(A)	13.71	11.07	13.78	11.12	13.85	11.17	13.92	11.23	13.99	11.29	14.05	11.34
Voltage at Pmax -Vmp(V)	41.35	38.58	41.48	38.72	41.64	38.86	41.80	39.00	41.93	39.14	42.10	39.28
Current at Pmax - Imp(A)	12.83	10.27	12.90	10.33	12.97	10.39	13.04	10.45	13.12	10.51	13.19	10.56
Module Efficiency -ηm(%)	20.5	/	20.7	/	20.9	/	21.1	/	21.3	/	21.5	/
Power Tolerance(W)	(0, +4.99W)											
Maximum System Voltage(V)	1500Vdc (IEC / UL)											
Maximum Series Fuse Rating (A)	30A											

STC : Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

NOCT : Irradiance 800W/m², Ambient Temperature 20°C, Air Mass 1.5, Wind Speed 1m/s

Mechanical Specifications

External Dimensions	2278x1134x35mm
Weight	30.5kg
Solar Cells	Mono crystalline 182mm (2x72pcs)
Front Glass	AR Coated 2+2 mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68
Output Cables	4.0mm ² , 1200mm (+), 1200mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Packing Configuration

	2278x1134x35mm	
Container	20'GP	40'HQ
Pieces per Pallet	31	31
Pallets per Container	4	20
Pieces per Container	124	620

Temperature Characteristics

Pmax Temperature Coefficient	-0.350%/°C
Voc Temperature Coefficient	-0.275%/°C
Isc Temperature Coefficient	+0.045%/°C
Operating Temperature	-40~+85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C

Current-Voltage & Power-Voltage Curves (SKT555M10)

