


BALLAST 3°.K ART. 23003.K

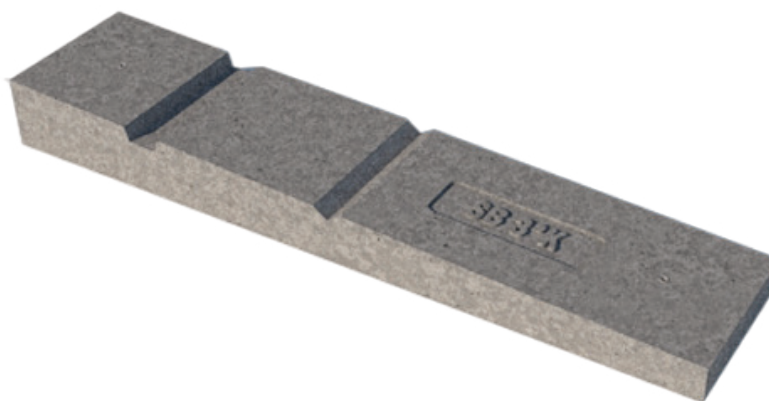


Material	The main material of SUN BALLAST is concrete, which allows a low wear over time and the ability to withstand even the most intense perturbations and different climatic conditions		
Application	Any type of flat roof with a maximum slope of 5° on the ground, on beaten ground with inert material or pavements		
Inclination angle	3°	Quantity for pallet	12 Pieces
Ballast weight	41 kg	Pallet dimensions	98 cm x 65 cm h = 46 cm
Module positioning	Horizontal / Vertical	Pallet weight	492 kg



SYSTEM DETAILS

VERTICAL PANEL LAYING

Side view

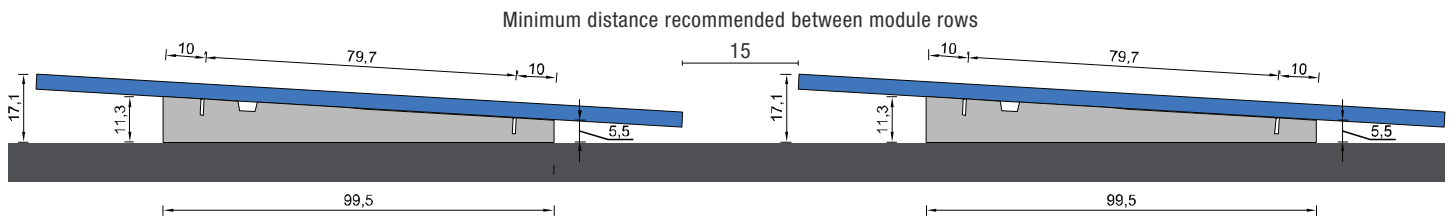


Top view

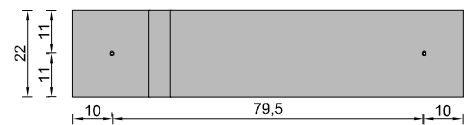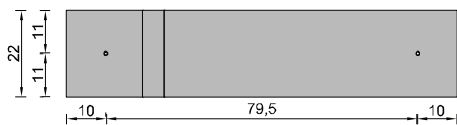

HORIZONTAL PANEL LAYING

Side view

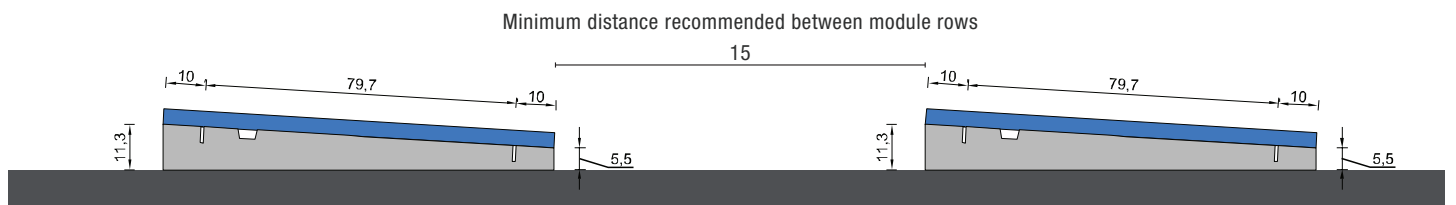

INFO

- The torque applied shall refer to the mechanical standard conforming to the bolt in use; with M8 bolts in stainless steel use a torque of 12 - 14 Nm
- Avoid screwdrivers impulse
- It's recommended to consult the information indicated in the assembly instructions of the panel manufacturer
- Always follow Sun Ballast assembly instructions.
- The dimensions shown in the figure are all expressed in centimeters.