


## 15° SISTEMA CONNECT

### ART. 230015.CF/.CR/.CRT

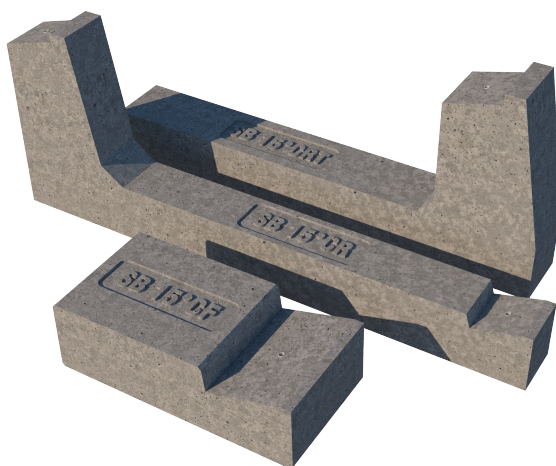

<b>Material</b>	The main material of SUN BALLAST is concrete, which allows a low wear over time and the ability to withstand even the most intense perturbations and different climatic conditions		
<b>Application</b>	Any type of flat roof with a maximum slope of 5 ° on the ground, on beaten ground with inert material or pavements		
<b>Inclination angle</b>	15°	<b>Distance between modules</b>	Fixed distance
<b>Module positioning</b>	Horizontal		

#### Front Ballast Art. 23015.CF

<b>Ballast weight</b>	21 kg	<b>Pallet dimensions</b>	98 cm x 90 cm h= 44 cm
<b>Quantity for pallet</b>	30 Pieces	<b>Pallet weight</b>	630 kg

#### Central Ballast Art. 23015.CR

<b>Ballast weight</b>	28 kg	<b>Pallet dimensions</b>	98 cm x 90 cm h= 61 cm
<b>Quantity for pallet</b>	20 Pieces	<b>Pallet weight</b>	560 kg


#### Terminal Ballast Art. 23015.CRT

<b>Ballast weight</b>	30 kg	<b>Pallet dimensions</b>	80 cm x 80 cm h= 57 cm
<b>Quantity for pallet</b>	14 Pieces	<b>Pallet weight</b>	420 kg

## SYSTEM DETAILS

### HORIZONTAL PANEL LAYING

Side view

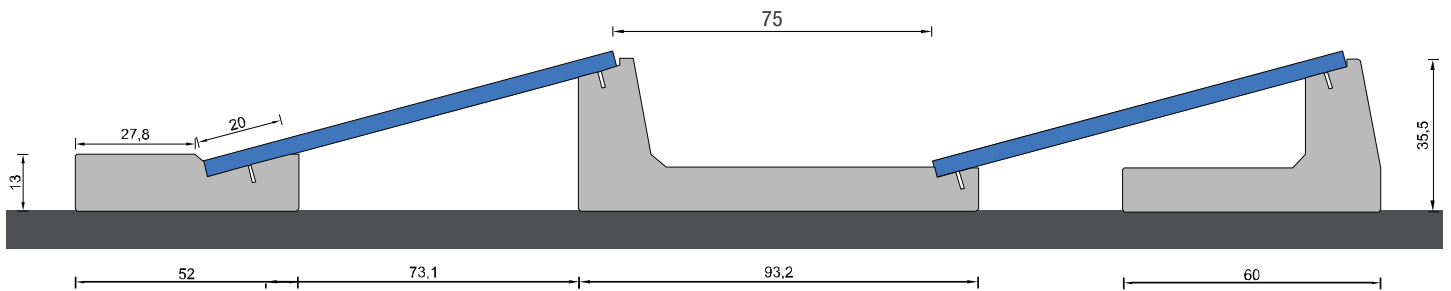

Top view



#### INFO

- The torque applied shall refer to the mechanical standard conforming to the bolt in use; with M8 bolts in stainless steel use a torque of 12 - 14 Nm
- Avoid screwdrivers impulse
- It's recommended to consult the information indicated in the assembly instructions of the panel manufacturer
- Always follow Sun Ballast assembly instructions.
- The dimensions shown in the figure are all expressed in centimeters.
- Minimum recommended configuration: 5 rows of 5 panels.
- For short side panel dimensions greater than 1m it is advisable to consult our technical department.
- For any information visit the website [www.sunballast.it](http://www.sunballast.it)