



## Main Parameters


Eff (%)	Pmpp(W)	Uoc(V)	Isc (A)	FF (%)	Ump(V)	Imp(A)
26.0	5.73	0.752	8.806	86.61	0.682	8.410
25.9	5.71	0.751	8.797	86.42	0.681	8.382
25.8	5.69	0.751	8.772	86.38	0.680	8.368
25.7	5.67	0.750	8.748	86.36	0.679	8.340
25.6	5.64	0.750	8.873	86.30	0.679	8.327
25.5	5.62	0.749	8.719	86.21	0.678	8.315
25.4	5.60	0.749	8.687	86.19	0.678	8.276
25.3	5.58	0.748	8.682	86.10	0.677	8.261
25.2	5.56	0.748	8.658	85.91	0.676	8.238
25.1	5.53	0.748	8.631	85.88	0.675	8.218
25.0	5.51	0.747	8.623	85.52	0.674	8.186
24.9	5.49	0.747	8.604	85.48	0.673	8.172
24.8	5.47	0.747	8.592	85.30	0.672	8.149
24.7	5.45	0.746	8.586	85.11	0.671	8.135
24.6	5.42	0.746	8.577	84.87	0.670	8.115
24.5	5.40	0.745	8.573	84.63	0.669	8.096

\*Standard Test Condition: Irradiance 1000W/m<sup>2</sup>, Temperature 25°C, Air Mass 1.5;  
The above parameters are subject to conditions,

## Temp. Coefficient

Voc (%/°C)	~-0.27%/°C
Isc (%/°C)	~0.055%/°C
Pm (%/°C)	~-0.258%/°C

## Characteristic Curve

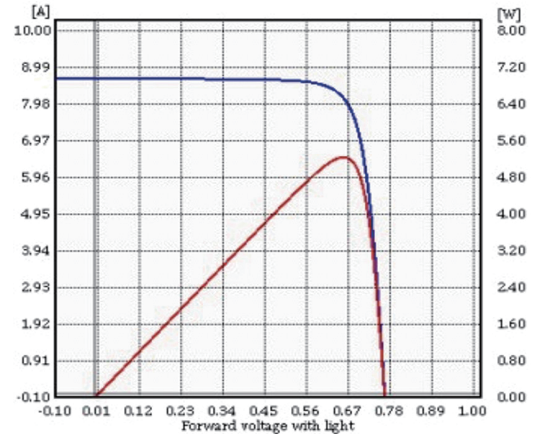

## Specification

Size	210 mm*105 mm±0.25 mm
Material	n-type mono crystalline silicon
Thickness	120±20 μm
Front(-)	18*0.06mm main grid line (Ag), Blue transparent conductive film(TCO)
Back(+)	18*0.06mm main grid line (Ag), Blue transparent conductive film(TCO)

## Packaging Information

Quantity	24case/box, 140pcs/case, 3360pcs/box
Size	60cm*30cm*30.5cm