


BALLAST 15° ART. 23015

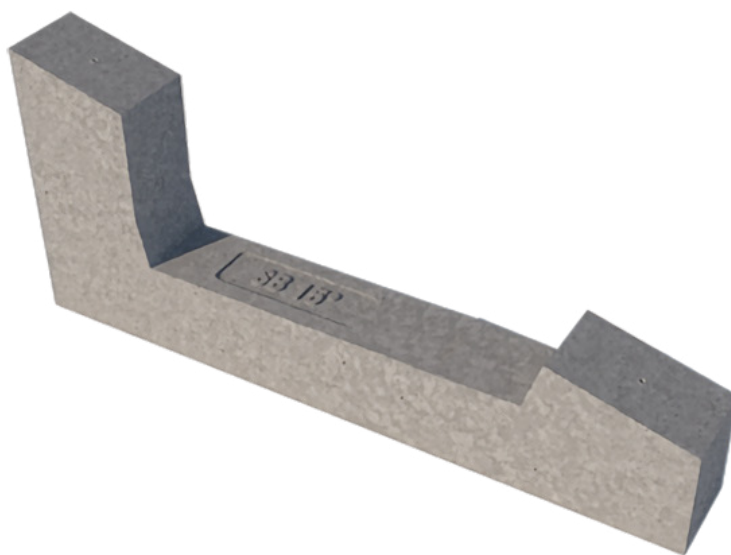

MATERIAL	The main material of SUN BALLAST is concrete, which allows a low wear over time and the ability to withstand even the most intense perturbations and different climatic conditions		
APPLICATION	Any type of flat roof with a maximum slope of 5 ° on the ground, on beaten ground with inert material or pavements		
INCLINATION ANGLE	15°	QUANTITY FOR PALLET	10 Pieces
BALLAST WEIGHT	47 kg	PALLET DIMENSIONS	98 cm x 65 cm h = 62 cm
MODULE POSITIONING	Horizontal / Vertical	PALLET WEIGHT	470 kg

SYSTEM DETAILS

HORIZONTAL PANEL LAYING

Side view

Minimum distance recommended
between module rows 80 cm




Top view



VERTICAL PANEL LAYING

Side view

Minimum distance recommended
between module rows 80 cm

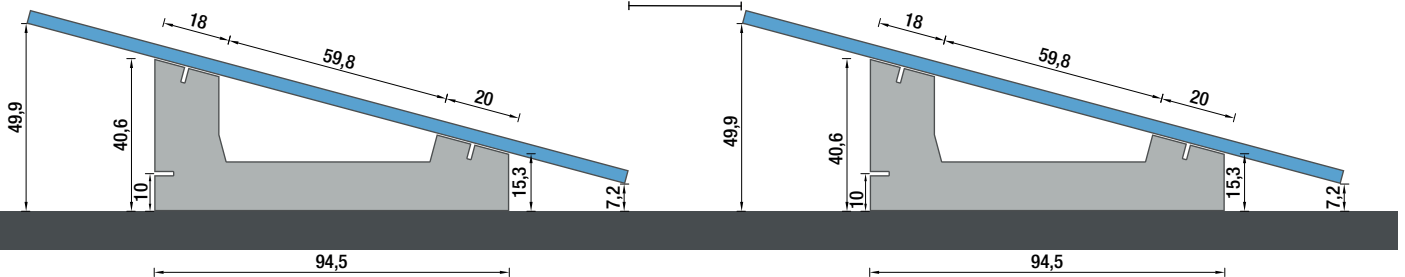

INFO

- The torque applied shall refer to the mechanical standard conforming to the bolt in use; with M8 bolts in stainless steel use a torque of 12 - 14 Nm
- Avoid screwdrivers impulse
- It's recommended to consult the information indicated in the assembly instructions of the panel manufacturer
- Always follow Sun Ballast assembly instructions.
- The dimensions shown in the figure are all expressed in centimeters.