


MSMDxxxM10-HJT108DSB

430-450w

**108-cell Bifacial Half Cell
Double-glass Solar Module**

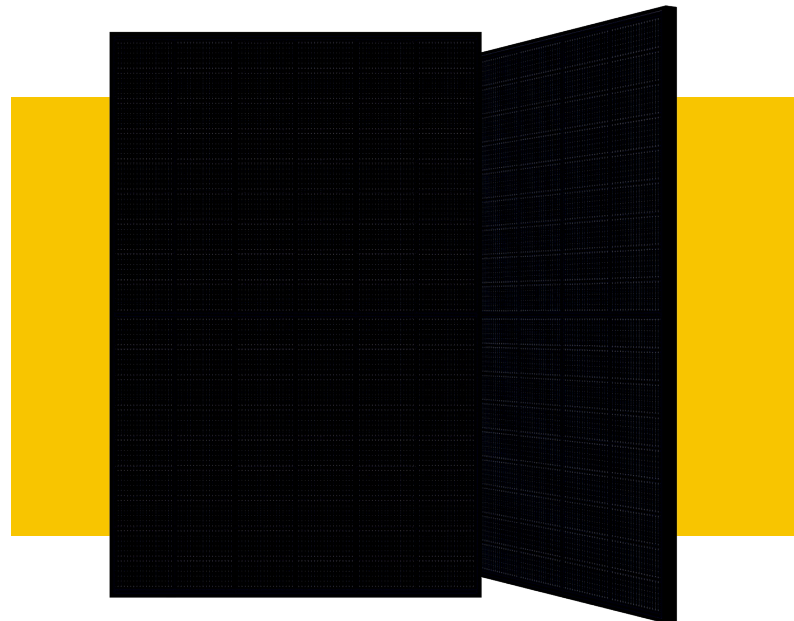

Product Advantages



HJT 3.0

Combining gettering process and double-sided $\mu\text{-Si}$ to maximize cell efficiency and module power.



-0.26%/°C Pmax temperature coefficient

More stable power generation performance and even better in hot climate.



Small Chamfer Design

Bigger power generation area on the solar cell, increasing 1% cell power of single piece.



SMBB design with Half-Cut Technology

Shorter current transmission distance, less resistive loss and higher cell efficiency.



Up to 90% Bifaciality

Natural symmetrical bifacial structure bringing more energy yield from the backside.



Sealing with PIB based sealant

Stronger water resistance, greater air impermeability to extent module lifespan.



Higher reliability

Industrial leading product and performance warranty, ensuring module's consistent outstanding performance.



Ideal choice for residential rooftop

23.04%


Module efficiency

450W

Highest power output

Performance Warranty

● Standard Module ● MSMD HJT Module

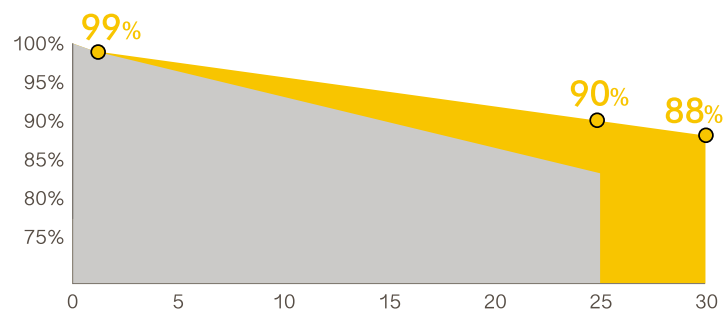

-1.00%

First year power degradation

-0.375%

Annual degradation

15
Years

Materials and workmanship warranty

30
Years

Linear power warranty


Product Certification



MSMDxxxM10-HJT108DSB

Engineering Drawings

Unit: mm

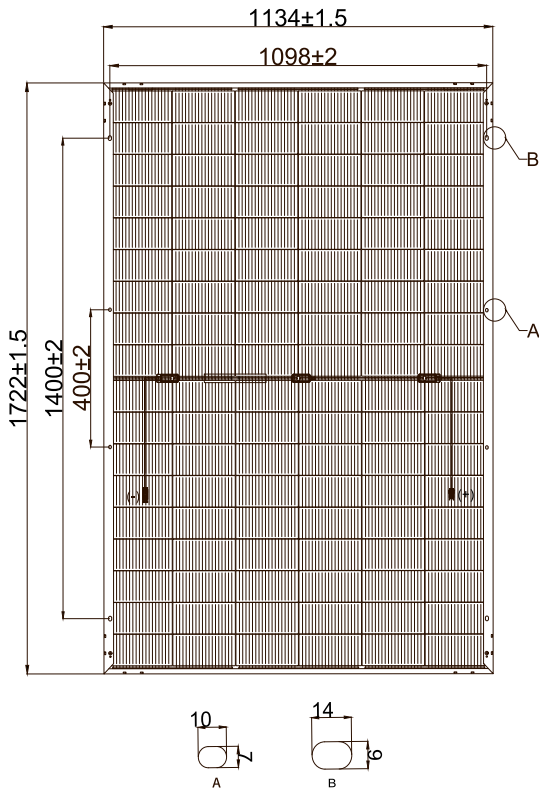

Electrical Characteristics (STC*)

MSMDxxxM10-HJT108DSB	430	435	440	445	450
Maximum Power (Pmax)	430W	435W	440W	445W	450W
Module Efficiency (%)	22.02%	22.28%	22.53%	22.79%	23.04%
Optimum Operating Voltage (Vmp)	34.60V	34.86V	35.12V	35.38V	35.63V
Optimum Operating Current (Imp)	12.43A	12.48A	12.53A	12.58A	12.63A
Open Circuit Voltage (Voc)	41.37V	41.64V	41.91V	42.18V	42.44V
Short Circuit Current (Isc)	12.95A	13.00A	13.05A	13.10A	13.15A
Operating Module Temperature	-40 to +85 °C				
Maximum System Voltage	DC1500V (IEC)				
Maximum Series Fuse	25A				
Power Tolerance	0~+5W				
Bifaciality	85% ± 5%				

*STC: Irradiance 1000 W/m², cell temperature 25 °C, AM=1.5. Tolerance of Pmax is within +/- 3%.

BSTC**

Maximum Power (Pmax)	475W	480W	485W	490W	495W
Optimum Operating Voltage (Vmp)	34.60V	34.86V	35.12V	35.38V	35.63V
Optimum Operating Current (Imp)	13.73A	13.77A	13.81A	13.85A	13.90A
Open Circuit Voltage (Voc)	41.37V	41.64V	41.91V	42.18V	42.44V
Short Circuit Current (Isc)	14.31A	14.34A	14.38A	14.42A	14.47A

**BSTC: Front side irradiation 1000W/m², back side reflection irradiation 135W/m², AM=1.5, ambient temperature 25 °C.

Mechanical Characteristics

Cell Type	HJT Mono 182 × 91.75mm
Cell Connection	108 (6 × 18)
Module Dimension	1722 × 1134 × 30 mm
Weight	26/22 kg
Junction Box	IP68
Output Cable	4mm ² , 1200mm in length, length can be customized / UV resistant
Connectors Type	MC4 original
Frame	Anodised aluminum alloy (Black)
Front Load	5400 Pa
Rear Load	2400 Pa
Glass Thickness	Double glass, 2.0mm/1.6mm

Temperature Characteristics

Nominal Operating Cell Temp. (NOCT)	44 °C ± 2 °C
Temperature Coefficiency of Pmax	-0.26%/°C
Temperature Coefficiency of Voc	-0.24%/°C
Temperature Coefficiency of Isc	0.04%/°C

Safety & Warranty

Safety Class	Class II
Product Warranty	15 yrs Workmanship
Performance Warranty	30 yrs Linear Warranty*

* 1st year 99%, after 2nd year 0.375% annual degradation to year 30.

Shipping Configurations

Container Length	HC
Pallets Per Container	40'
Modules Per Pallet (pcs)	26
Modules Per Container (pcs)	36
Modules Per Container (pcs)	936