


605-625W

RH978TDGDC

Topcon 16BB Half-cut Bifacial
Dual-Glass Module

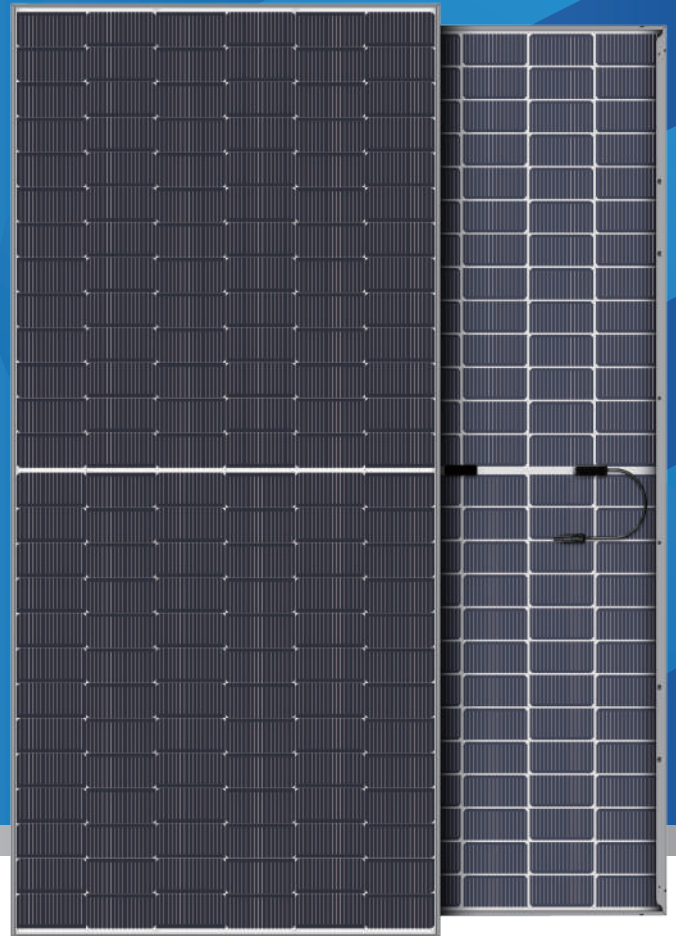

N-type Topcon technology for lower LCOE

The lower temperature coefficient and better low irradiance performance of Topcon technology can effectively reduce LCOE.



Fire class A, harsh environment adaptability

The back of the dual-glass module adopts high transparent glass, which can adapt to all kinds of harsh environment, and the fire rating can reach Class A.



30-year power warranty

The average life of dual-glass modules is 30 years, 5 years longer than that of single-glass modules.



Double-sided power generation, higher income

The dual-glass module has a bifaciality up to 80% and a power generation gain of 7%-25% on the back side.




LINEAR PERFORMANCE WARRANTY



Product warranty on materials and workmanship



Linear power output warranty

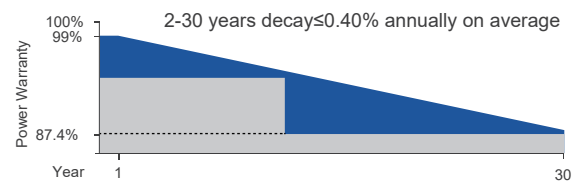

CERTIFICATES

ISO 9001: 2015
Quality Management System

IEC 61215 / IEC 61730

ISO 14001: 2015
Environmental Management System

ISO 45001: 2018
Occupational Health &
Safety Management System

*Certification requirements vary in different markets, please consult with RUNHAI sales team for appropriate certification.

605-625W

Topcon 16BB Half-cut Bifacial
Dual-Glass Module

ELECTRICAL PARAMETERS @ STC

	605	610	615	620	625
Max. Power Output Pmax (W)	605	610	615	620	625
Power Tolerance	0~+3%	0~+3%	0~+3%	0~+3%	0~+3%
Max. Power Voltage Vmp (V)	45.43	45.60	45.77	45.93	46.10
Max. Power Current Imp (A)	13.32	13.38	13.44	13.50	13.56
Open Circuit Voltage Voc (V)	55.18	55.31	55.44	55.57	55.70
Short Circuit Current Isc (A)	13.95	14.03	14.11	14.19	14.27
Module Efficiency (%)	21.65	21.83	22.00	22.18	22.36

*STC (Standard Test Condition): Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5
*Measurement Tolerance (±3.0%)

Integrated Power @ STC (Reference to 620 W front)

Power Gains	5%	10%	15%	20%	25%
Max. Power Output Pmax (W)	651	682	712	742	773
Max. Power Voltage Vmp (V)	45.93	45.93	45.83	45.83	45.83
Max. Power Current Imp (A)	14.18	14.85	15.53	16.20	16.88
Open Circuit Voltage Voc (V)	55.57	55.57	55.67	55.67	55.67
Short Circuit Current Isc (A)	14.90	15.61	16.32	17.03	17.74

TEMPERATURE COEFFICIENTS

Temperature Coefficients of Pmp	-0.30%/°C
Temperature Coefficients of Voc	-0.25%/°C
Temperature Coefficients of Isc	+0.046%/°C

MECHANICAL PARAMETERS

Cell Type	Topcon 182x91mm
Number of Cells	156pcs(6x26)
Dimensions (L*W*H)	2465x1134x35mm
Weight	33.4kg
Frame	Anodised Aluminum
Junction Box	IP68, 3 bypass diodes
Cable, Length	4.0mm ² , 300mm


OPERATING CONDITION

Maximum System Voltage(V)	1500(DC)
Operating Temperature(°C)	-40~+85
Max. Wind Load / Snow Load(Pa)	2400/5400
Max. Series Fuse Rating(A)	30
Fire Rating	Class A
Bifaciality	80±5%
NOCT	45°C

PACKAGE INFORMATION


Container 40'HQ	496pcs
Quantity / Pallet	31pcs
Package size: 2495×1150×1249mm; Net weight: 1035.4kg; Gross weight: 1092.4kg	

ASSEMBLY DRAWING (Unit:mm)

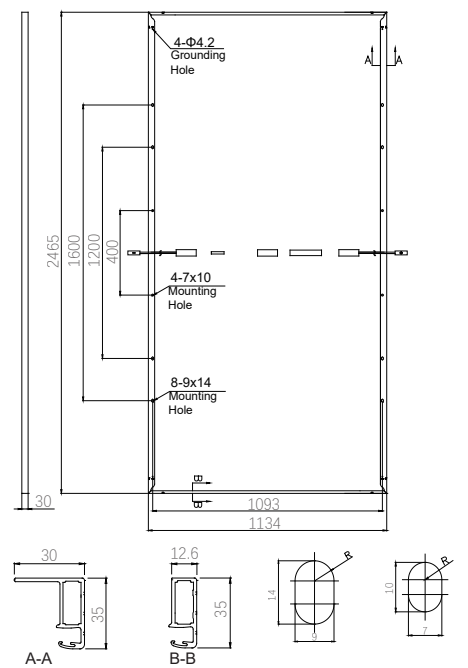

I-V CURVES

Test temperature 25°C

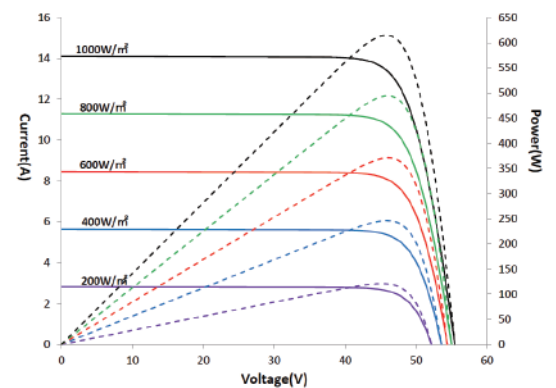

Irradiance: AM1.5, 1000W/m²

