

EVO 5N

430-450W SE5-54HN-type HJT Ultra Black
Solar Module

23.04%

Max. Module Efficiency

HJT 2.0 Technology

Combining gettering process and single-side $\mu\text{c-Si}$ technology to ensure higher cell efficiency and higher module power.

-0.26%/°C Pmax temperature coefficient

More stable power generation performance and even better in hot climate.

SMBB design with Half-Cut Technology

Shorter current transmission distance, less resistive loss and higher cell efficiency.

Up to 90% Bifaciality

Natural symmetrical bifacial structure bringing more energy yield from the backside.

Sealing with PIB based sealant

Stronger water resistance, greater air impermeability to extend module lifespan.

Quality Management System and Product Certification

IEC61215/61730, IEC62804(PID), IEC61701(Salt),
IEC62716 (Ammonia), IEC60068-2-68(Sand),
ISO 9001:2015/quality management system,
ISO 14001:2015/environmental management system,
ISO 45001:2018/occupation health safety management system,
ISO 50001:2011/energy management system,
IEC TS 62941-2016/PV industry quality management system.


Quality Guarantee

25 year


Materials Warranty

30 year


Power Warranty

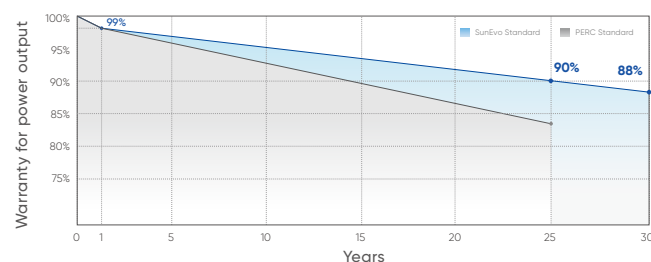

Drawings

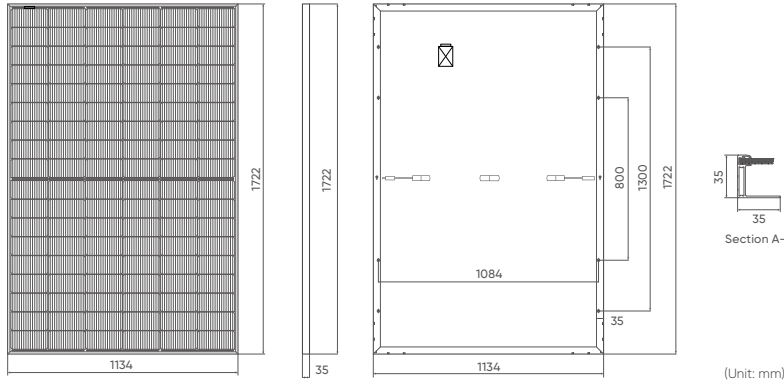

Product Image

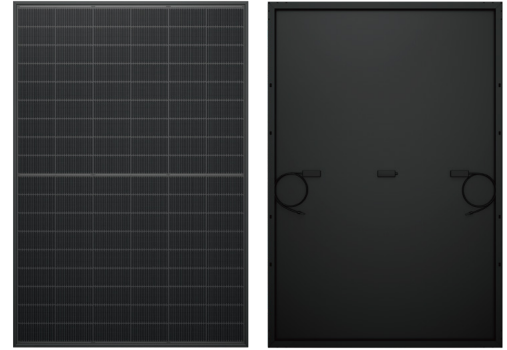

Mechanical Characteristics

| | |
|----------------------|--|
| Solar Cells | N-type Mono |
| No. of Cells | 108 (6×18) |
| Dimensions | 1722 × 1134 × 35mm |
| Weight | 21.0kg |
| Front Glass | 3.2mm coated tempered glass |
| Frame | Anodized aluminium alloy |
| Junction Box | Ip68 rated (3 by pass diodes) |
| Output Cables | 4mm ² , 300mm (+) / 300mm (-), Length can be customized |
| Connectors | MC4 compatible |
| Mechanical Load Test | 5400Pa |
| Packaging | 31pcs/box, 186pcs/20'GP, 806pcs/40'HQ |

Operating Characteristics

| | |
|------------------------------|----------------|
| Operating Module Temperature | -40°C to +85°C |
| Maximum System Voltage | 1500V DC (IEC) |
| Maximum Series Fuse Rating | 25A |
| Power Tolerance | 0~+5W |



Temperature Characteristics

| | |
|--------------------------------------|-----------|
| Nominal Operating Temperature (NMOT) | 44±2°C |
| Temperature Coefficient of Pmax | -0.26%/°C |
| Temperature Coefficient of Voc | -0.24%/°C |
| Temperature Coefficient of Isc | +0.04%/°C |

Electrical Parameters (STC*)

| Module Type: SE5-54H | 430 | 435 | 440 | 445 | 450 |
|-----------------------------------|-------|-------|-------|-------|-------|
| Maximum Power (Pmax/W) | 430 | 435 | 440 | 445 | 450 |
| Open Circuit Voltage (Voc/V) | 41.37 | 41.64 | 41.91 | 42.18 | 42.44 |
| Short Circuit Current (Isc/A) | 12.95 | 13.00 | 13.05 | 13.10 | 13.15 |
| Voltage at Maximum Power (Vmpp/V) | 34.60 | 34.86 | 35.12 | 35.38 | 35.63 |
| Current at Maximum Power (Impp/A) | 12.43 | 12.48 | 12.53 | 12.58 | 12.63 |
| Module Efficiency (%) | 22.02 | 22.28 | 22.53 | 22.79 | 23.04 |

I-V Curve

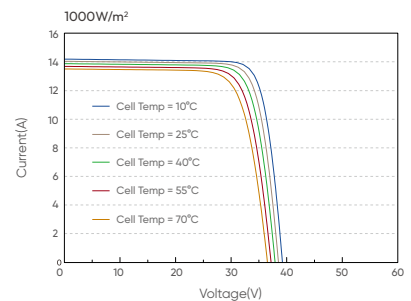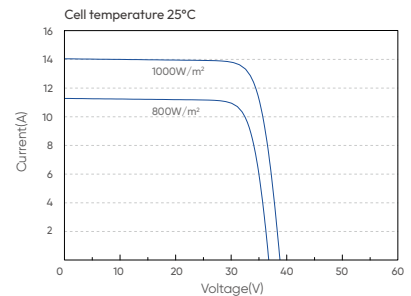

Electrical Parameters (NMOT*)

| | | | | | |
|-----------------------------------|-------|-------|-------|-------|-------|
| Maximum Power (Pmax) | 327 | 331 | 335 | 338 | 342 |
| Open Circuit Voltage (Voc/V) | 39.48 | 39.74 | 40.00 | 40.26 | 40.50 |
| Short Circuit Current (Isc/A) | 10.44 | 10.48 | 10.52 | 10.56 | 10.60 |
| Voltage at Maximum Power (Vmpp/V) | 32.64 | 32.91 | 33.17 | 33.34 | 33.60 |
| Current at Maximum Power (Impp/A) | 10.02 | 10.06 | 10.10 | 10.14 | 10.18 |

1. Standard Test Conditions [STC]: irradiance 1000W/m²; AM 1.5; ambient temperature 25°C according to EN 60904-3;
 2. Nominal Module Operating Temperature (NMOT): Irradiance 800W/m²; wind speed 1m/s, ambient temperature 20°C.
 3. Tolerance of Pm: 0~+5W, Measuring uncertainty of power: ±3%. Performance deviation of Voc [V], Isc [A], Vm [V] and Im [A]: ±3%.