


Battery Pack

Link5/10/15/20-L

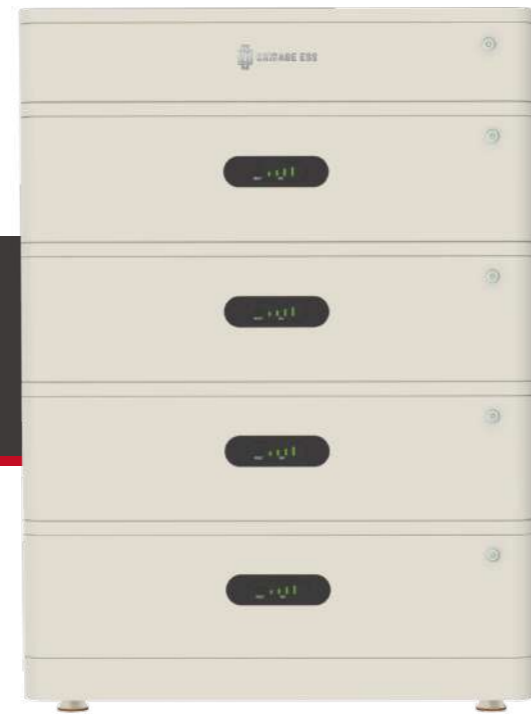

Product Features

- Flexible modular design, from 5kWh to 20kWh each battery stack
- IP65 protection degree, suitable for both indoor and outdoor installation
- Mounting handle design, easy lift and installation
- Quick connector and auto battery address setting, save installation time
- Independent BMS and SOC indicator for each module
- Safe LiFePO4 rechargeable battery

Technical Data

| Model | Link5-L | Link10-L | Link15-L | Link20-L |
|--------------------------------|---|----------------|----------------|----------------|
| Nominal Energy (Wh) | 5,120 | 10,240 | 15,360 | 20,480 |
| Usable Energy (Wh) | 4,600 | 9,200 | 13,800 | 18,400 |
| Nominal Capacity (Ah) | 100 | 200 | 300 | 400 |
| Nominal Voltage (V) | 51.2 | | | |
| Operation Voltage Range (V) | 40-58.4 | | | |
| Standard Charge Current (A) | 50 | 100 | 150 | 200 |
| Standard Discharge Current (A) | 50 | 100 | 150 | 200 |
| Max. Charge Current (A) | 50 | 100 | 150 | 200 |
| Max. Discharge Current (A) | 50 | 100 | 150 | 200 |
| Max. Parallel Quantities | 4 pcs Link5-L modules | | | |
| Operation Temperature | Charge Temperature: 0°C~55°C Discharge Temperature: -20°C~55°C | | | |
| Working Humidity | 20~95%RH (No condensing) | | | |
| Protection Degree | IP65 | | | |
| Dimension (mm) | 665Wx530Dx355H | 665Wx530Dx535H | 665Wx530Dx715H | 665Wx530Dx895H |
| Net Weight (kg) | 84 | 142 | 200 | 258 |
| Installation | Floor mounted | | | |
| Certification | CE, UN38.3, IEC62619 | | | |
| Communication | CAN, RS485 | | | |
| Lifetime | 6,000 Cycles@80% DOD | | | |
| Warranty | 5 Years | | | |