


**R530M / R535M / R540M /
R545M / R550M**



21.28%
MAXIMUM EFFICIENCY

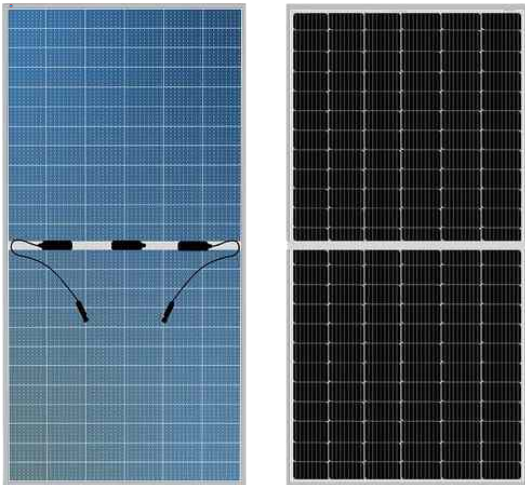

Raaj Solar

RAAJ Solar, established in the year 2010 in Gujarat which is one of the leading Solar Photovoltaic Module Manufacturer with strong customer base PAN India. We have set up an **Fully Automated Manufacturing unit** in Chandarda with an annual Production capacity of **300 MW**, using state-of-the-art technology, for higher Quality & Efficiency.

We offer DCR & NON DCR Multi-Crystalline PV modules Ranging from 325Wp to 335Wp and MONO PERC Half Cut cell Mono Facial & Bi-Facial PV Modules ranging from 530Wp to 550Wp as per MNRE approved guidelines.

Assembled with high efficiency multi busbar PERC cells, half cell module configuration offer the Advantages of higher Power output, Perform Better in low light & temperature dependent performance, Lower risk of hot spot with accentuated tolerance for mechanical loading.

Certification



Solar Division

Bi-Facial



Superior Manufacturing Technology Design



In House Quality Checks



High Performance under low light condition



Anti Reflective Coated Glass



10 BB Cell



PID Resistance



Positive Power Tolerance



Test Performs : IR, Hipot & Ground Mounted



PAN India Presence



Sales & Service Support

Electrical Characteristics

	R530M	R535M	R540M	R545M	R550M
Maximum Power at STC (Pmax)	41.90	42.12	42.26	42.34	42.55
Optimum Operating Voltage (Vmp)	12.65	12.70	12.78	12.87	12.93
Optimum Operating Current (Imp)	49.18	49.39	49.54	49.61	49.82
Open Circuit Voltage (Voc)	13.22	13.27	13.35	13.45	13.51
Module Efficiency (%)	20.51	20.70	20.89	21.09	21.28
Cell Type & No. of Cells	Mono PERC 144 Half Cut Cells (72x2)				

Note: (irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C)

Bi-Facial Rear side Power Gain Output

Model	R530M	R535M	R540M	R545M	R550M
10% Module Output	583	589	594	600	605
15% Module Output	610	615	621	627	633
20% Module Output	636	642	648	654	660
25% Module Output	663	669	675	681	688

Note: Power gain from rear side depends upon the ground reflectance & bifacial factor

Mechanical Characteristics

Glass	3.2 mm Thickness, Tempered glass
Frame	Anodized aluminium alloy
Junction Box	3 splits, IP 68 rated
Output Cables & Connectors	400 mm with MC4 connectors
Operating Module Temperature	-40 °C to +85 °C
Maximum System Voltage	1500 V DC
Maximum Series Fuse Rating	20 A
Power Tolerance	0 to +5 W
Packing	28 pieces/pallet
Mechanical Load	5400 Pa for snow load & 2400 Pa wind load
Module size	2279 x 1134 x 35 mm
Module weight	28.6 Kg


Mono Temperature Characteristics

Temperature Coefficient of Pmax	-0.35%/°C
Temperature Coefficient of Voc	-0.27%/°C
Temperature Coefficient of Isc	+0.05%/°C

Reliable Quality

- High Energy Yield on field performance
- Anti - reflective surface to reduce power loss
- 100% EL inspection ensure modules are defect free
- Application class C, Safety Class II
- ISO 9001:2015, ISO14001:2015, ISO 45001:2018 Certified
- BIS/IS 14286 : 2010 / IEC 61215 : 2005
- IS/IEC 61730 (Part I) : 2004 & IS/IEC 61730 (Part II) : 2004
- UL Certified IEC 61701 & IEC 61853-1


Bi-Facial

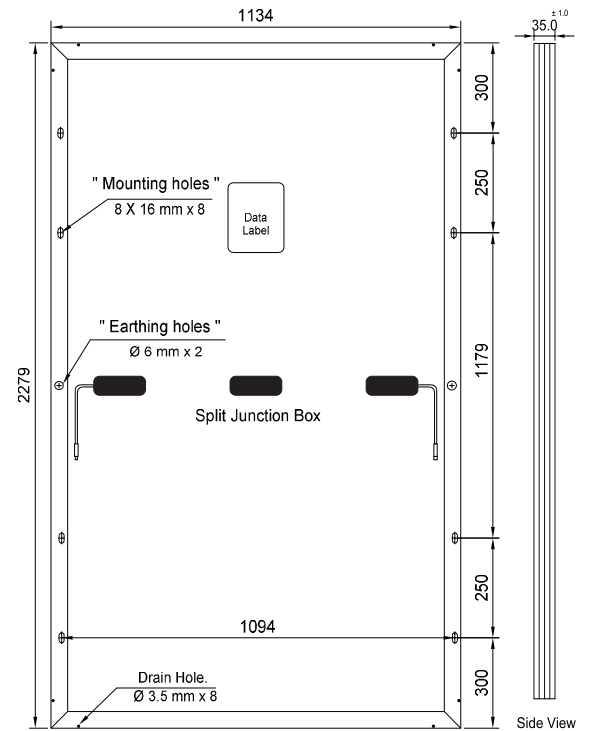


Superior Warranty

- 12 Year Product Warranty
- 27 Year Linear Power Output Warranty

Linear Performance

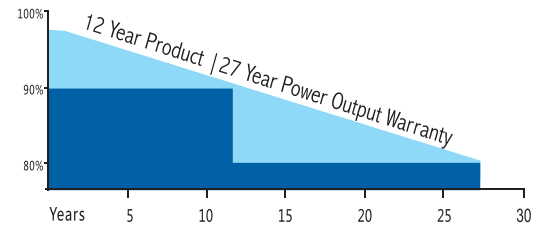

Current Voltage Curve

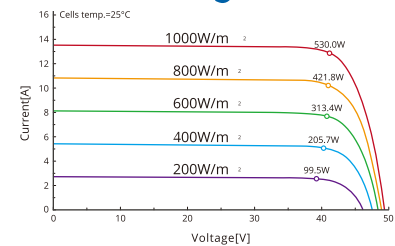


Raajratna Ventures Ltd.

AN ISO 9001:2015 Certified Company

Manufacturer & Exporter of Solar PV Modules

OFFICE :
 1402, 14th Floor, Phoenix, Near Honest Restaurant, Vijay Cross Roads to Commerce Six Roads,
 Navrangpura, Ahmedabad - 380009, Gujarat, India ☎ +91-79-2756 1915/16/17/18

WORKS :
 Survey No. 69/2, Village : Chandarda, Opp. Madhu Textile, Ahmedabad-Mehsana Highway, Taluka : Kadi, Dist. : Mehsana, Gujarat, India

✉ sales@raajsolar.com 🌐 www.raajsolar.com



📍 PAN INDIA AVAILABILITY

